


troll

2021

Technical Lighting

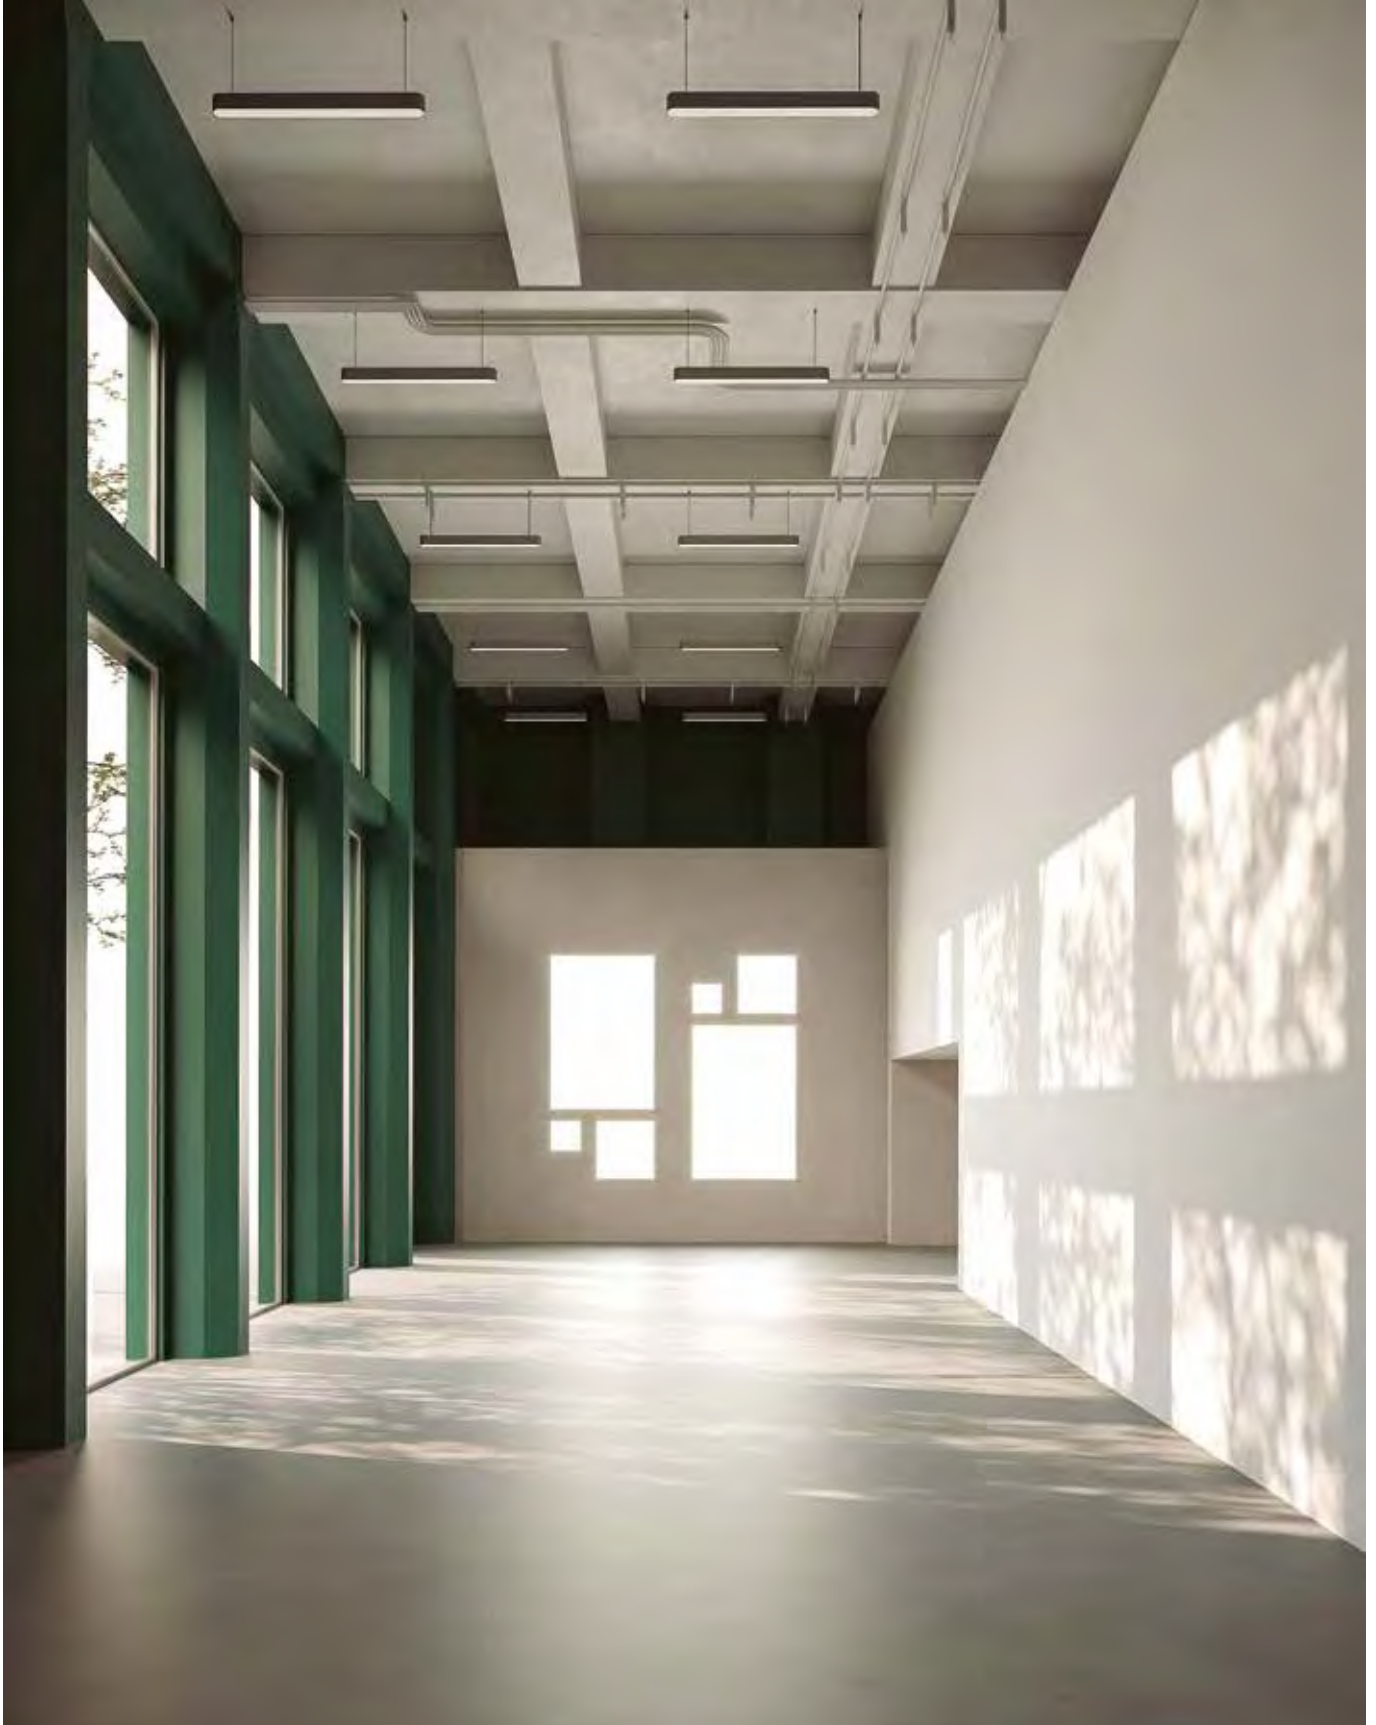

Our history backs us up, our values define us.

Formed by the brands Troll, Metalarte, Sagelux and Josfel, Luxiona is a group specialised in the development, manufacture and comercializacion of lighting solutions. It is based in Spain and has subsidiaries in France, Italy, Poland, Germany, Mexico, Peru, Chile and China, as well as three production factories in Europe and South America. We develop lighting solutions that not only serve to project light into a space, but do so in a way that perfectly suits the needs of the space and with the least possible impact on the environment. In this way we manage to create unique, healthy, socially responsible and environmentally friendly environments and sensations, which ensure maximum satisfaction for our customers.

troll

Architectural
& Technical
Lighting

metalarte

Decorative
Lighting

Sagelux

Emergency
& Security
Lighting

Josfel

Urban
Lighting




At Troll we understand light as an allied element in the construction process and we take advantage of its capacity to create atmospheres and pleasant sensations. The ideas that we materialise make us be at the forefront of lighting trends, offering a service that goes far beyond the concept of light and which is in permanent concept of light and that is in permanent harmonious relationship with the environment and people. environment and people. Our goal is to understand light, to dialogue with it, and to make the most of its possibilities.

At Troll we leave nothing to chance, our name and image are the reflection of a technology of a technology that has transformed the world by controlling light and making the most of its possibilities. and making the most of its possibilities. By choosing our products, our customers gain a partner who will provide them with all his experience and know-how to achieve experience and know-how to meet any challenge together challenge.

Producing environmentally friendly lighting solutions requires that these are efficient and can be adapted to the visual needs for each time of day, situation or time of year. At Troll we are able to achieve this by putting the control of the lighting in the hands of the user or by means of intelligent switching and control systems. The best way to illuminate is to focus on what really matters, and this knowledge is where our commitment to sustainability comes from.

Terminal T1 of Barcelona Airport, Spain

In collaboration with the The Artec3 lighting team we managed to harmonise a space in continuous conflict, which serves both as a waiting and a starting point, combining natural and artificial light, peaceful and chaotic in a matter of seconds. In this type of environment, the lighting solutions implemented in the terminal designed by the prestigious architect Ricardo Bofill RBTA (Ricardo Bofill Taller de Arquitectura), with a life span of over 60,000 hours, represent a great leap in efficiency, both from the energy and functional points of view. This is fundamental in an installation that receives 25 million passengers a year.

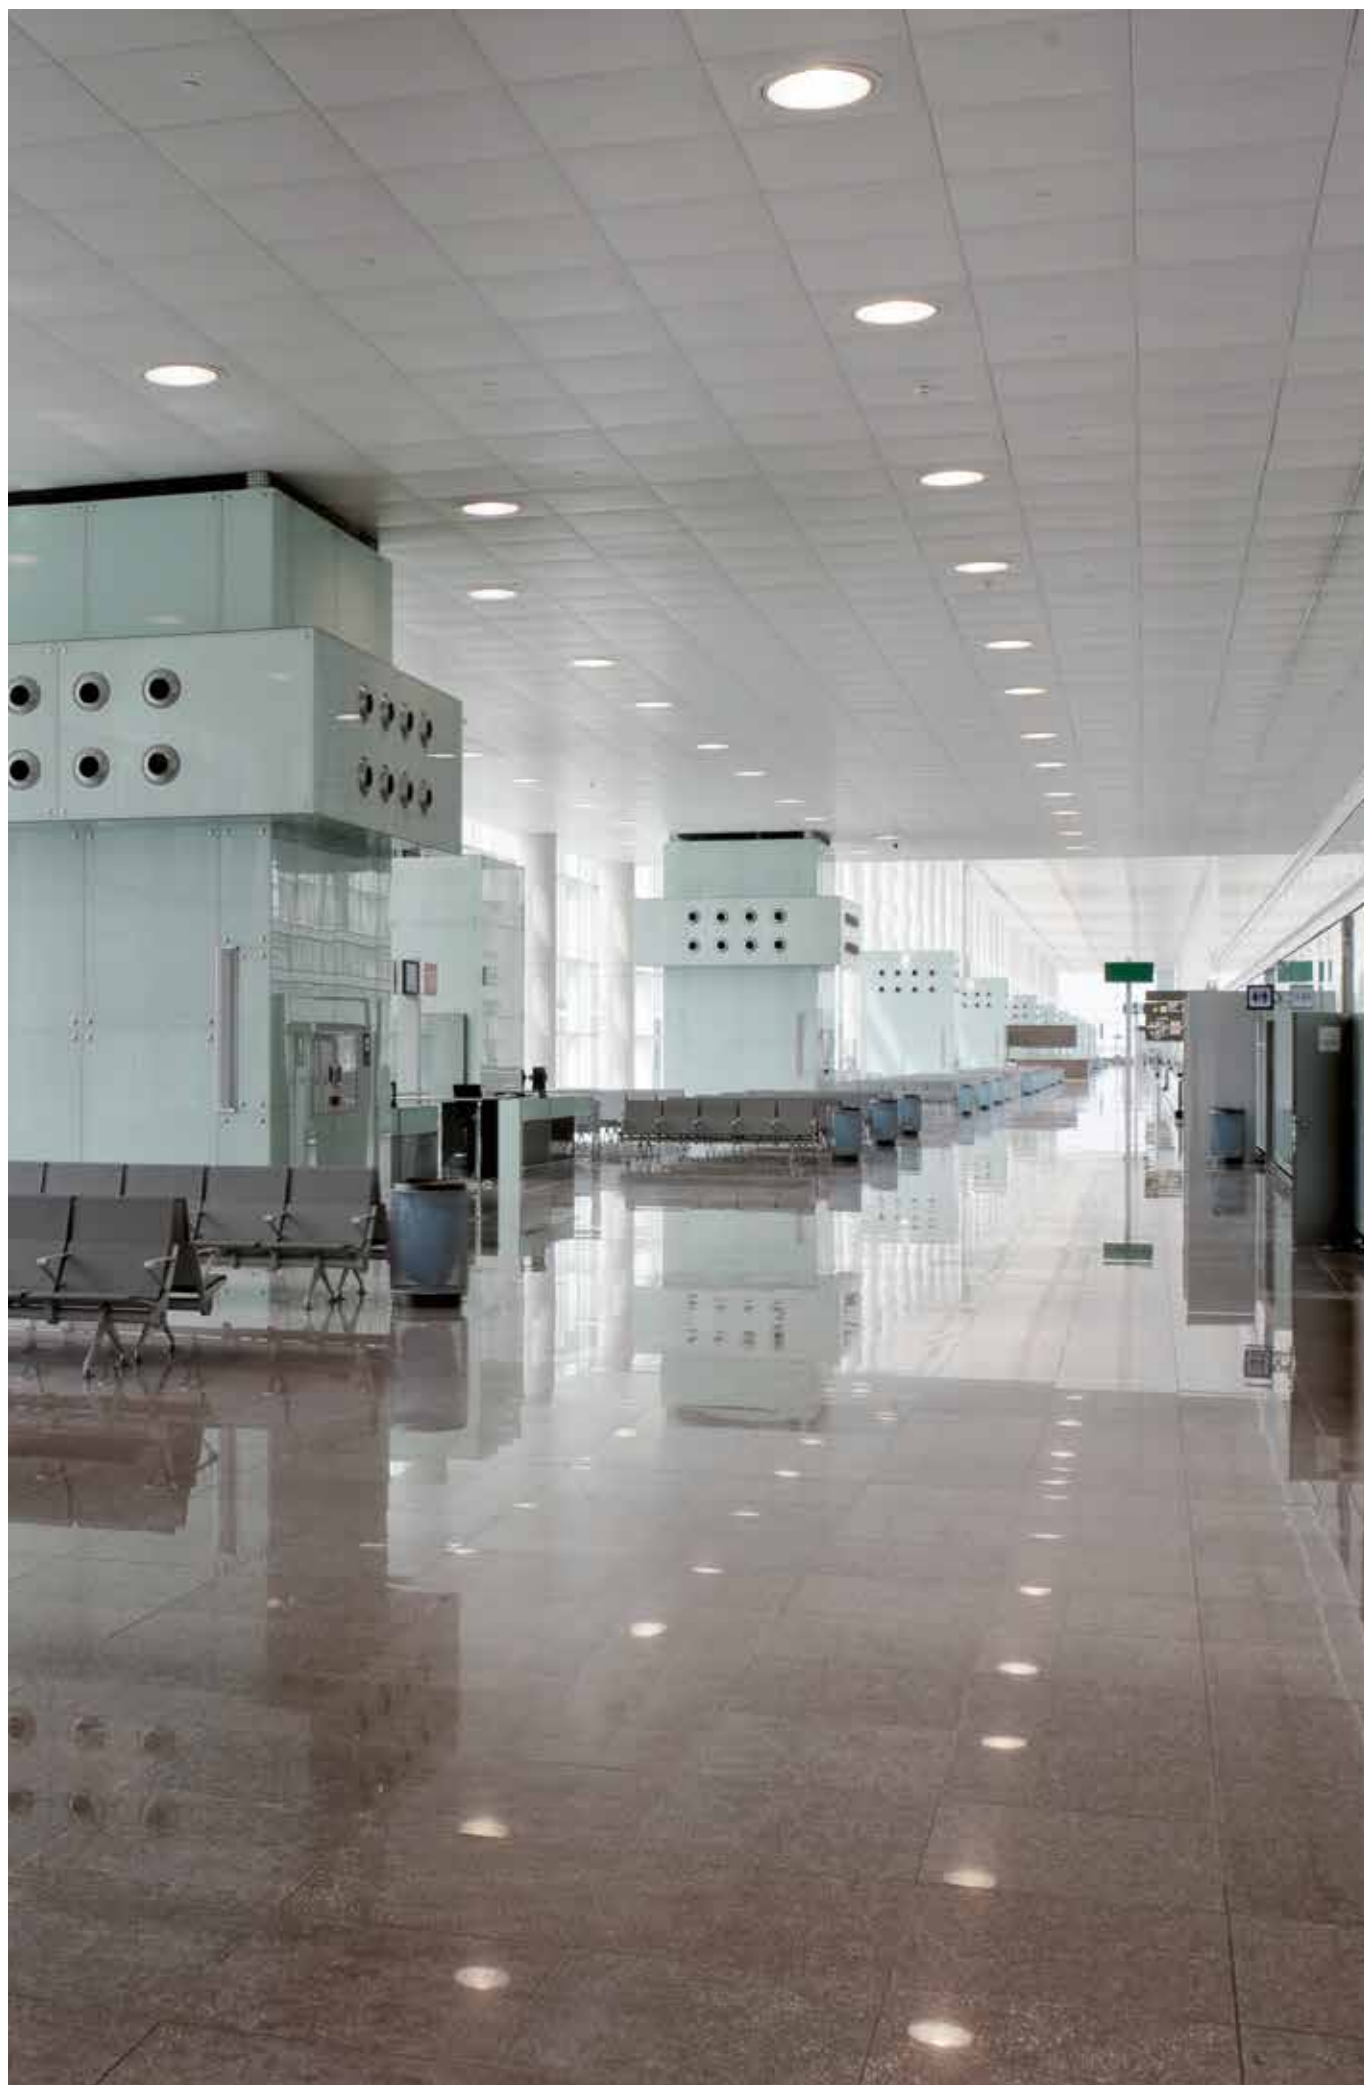



At Troll we understand that each client is unique. Each project that we develop is unique. That is why we are able to create unique solutions based on the needs of the user, the market and the sensations and emotions that you want to create in your space. We develop our clients' lighting ideas and all the business concepts they wish to implement, accompanying them at all times.

"Basilica de la Sagrada Família" in Barcelona, Spain

To use the most modern and efficient sources of light has allowed us to enhance the beauty of the wonderful heritage that this emblematic temple is, initiated in the nineteenth century and still under construction. The use of custom-made solutions for the icon of the city of Barcelona, designed by Antonio Gaudí, manages to highlight in a remarkable way the extraordinary power of light, simulating the entry of zenithal light from the west and east".

To create environments of light to make them a place of interaction between people, offering adequate control of contrasts and a good treatment of vertical planes, is the work that Troll puts into action through adequate lighting, achieving a direct effect on our physical and emotional well-being.

"Fondazione Alda Fendi" in Rome, Italy

The French designer Jean Nouvel, with his proposal for the white canvas of the Flying Surface luminaire, decorates the Fondazione Alda Fendi in Rome with a window's light effect. It gives this 17th century building a new way of understanding the essence of light".





The know-how accumulated after almost half a century of experience, together with our R+D+i department in constant search for new lighting solutions, has allowed Troll to be an innovative company with the use of the latest generation of materials and production processes. Looking to the future and keeping our feet in the present has proved to be the right way to keep us in a leading position in the market.

Cancer Prevention Center Warsaw, Poland

The Clean & Medical product range is the result of a constant search for lighting solutions. It is the result of innovation in materials and state-of-the-art production processes. In addition to the production quality with the Iso 1385:2012, 9001:2015 and 14001:2015 certificates.

Highlights



34
Artshape ^N

Architectural



58
Flying Surface by Jean Nouvel

Architectural



112
Magnetick ^N

Tracklights



144
Versatile ^N

Recessed Downlights



300
X-Line ^N

Surface & Suspended Linears



396
Agaline ^N

Industrial



92
Lumbo ^N

Tracklights



98
Luxcan ^N

Tracklights



192
Backlite ^N

Recessed Luminaires



238
Downled CS ^N

Surface & Suspended Downlights



406
Outdoor



16
Clean & Medical

Luxiona has more than 20 years of experience in lighting solutions for installations that require a lighting solutions for installations that require an atmosphere with a high degree of cleanliness, such as:

- Medical facilities and hospitals
- Pharmaceutical industry
- Chemical industry
- Food industry
- Electronics and precision industry

It offers three product ranges depending on the air cleanliness required in the installation:

- Clean
- Clean Class (ISO 3-9)*
- CClean ISO (1-2)*

**According to ISO 14644-1: Clean rooms and controlled adjoining premises.
Part 1: Classification of air cleanliness by particle concentration.*

Noteworthy characteristics:

- C56 anti-reflection effect, which minimises laser reflection.
- Diffusers resistant to the most commonly used disinfectants: ammonia, hydrogen peroxide and even ultraviolet radiation.
- Antibacterial coating.
- CRI>90 with R9 (blood colour enhancement) and R13 (tissue colour enhancement).
- Used especially in medical applications.
- Possibility of implementing dimming systems that reproduce the circadian cycle.



Hospital de Reus
Tarragona, Spain



Non-invasive Medicine Center
Gdańsk, Poland



Medical Center
Łańcut, Poland



Dr Irena Eris - Cosmetics Production Hall
Piaseczno, Poland



Silesian Center for Heart Diseases
Zabrze, Poland



Poultry Slaughterhouse
Radom, Poland

The COVID-19 disease has prompted us to develop a new range of germicidal UV-C disinfection products. range of UV-C This method of disinfection has been recommended by the WHO (World Health Organisation).

The products in this UVC range are specially designed and manufactured to meet the technical and safety requirements of UV-C radiation. All of them comply with the indications of the UNE 0068* specification recently published by AENOR, in the drafting of which Luxiona has collaborated.


* Safety requirements for UV-C devices used for air disinfection of premises and surfaces.

Direct radiation disinfection

Disinfection of air and surfaces by direct UV-C radiation. The germicidal action is produced by direct exposure to UV-C radiation.

Characteristics:

- Short disinfection time.
- Eliminates unpleasant odours.
- Possibility of connecting several luminaires to a single programmer.
- Does not disinfect areas hidden from direct exposure.
- Immediate use of the space once the radiation has finished (no need to ventilate as in the case of the ozone disinfection system).
- May affect materials that are not resistant to UV-C radiation.
(e.g. some types of polymers).
- Photobiological risk class RG3.

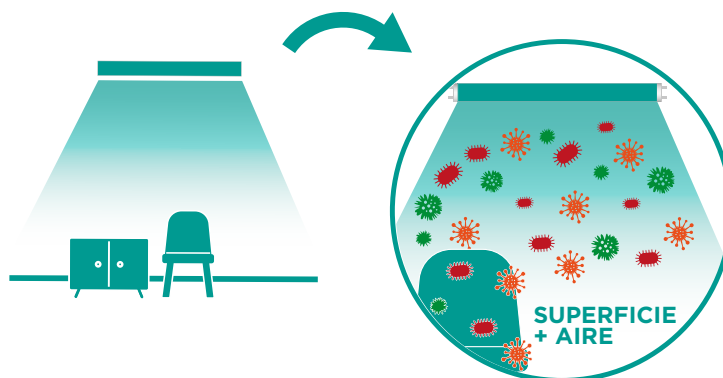

Living beings may NOT be present during radiation.

Professional use only.

Read the use and installation instructions carefully.


UVC- Flow Air Disinfection

Air disinfection through UV-C radiation.

The germicidal action is carried out by forced air circulation inside the disinfection chamber.

Characteristics:

- Longer disinfection time than by direct radiation.
- Eliminates unpleasant odours.
- Solution especially suitable for enclosed spaces.
- Easy filter change, no need to open.
- Electrical components are protected against dust and UV-C radiation.
- Low-noise fan.

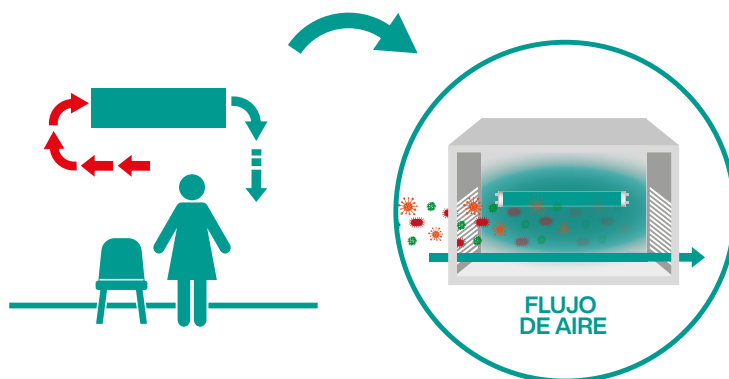

Living beings CAN be present during its operation.

Clean & Medical



In response to the trust placed by our customers in our devices, LUXIONA has created the "Safe Space" seal.

This seal is intended to recognise and publicise the commitment of those responsible for these spaces to offer their users maximum security".

LUXIONA troll

Lighting Consulting


We can accompany you in the development of your lighting projects by putting at your disposal our team of experts in Lighting Design and projects. We provide personalised advice and a complete follow-up of the project's needs until its implementation, offering a global and integral vision at every stage



Customer and project requirements

Stage 1: Plan with proposed distribution of luminaires.


- Detailed plans with sections, cuts, ceiling typology and furniture.
- Functions, branding, ambience, experience, sensations, levels and creation of environments.
- BIM methodology.



Lighting consulting, conceptualisation and project development Analysis and review of plans and needs

Stage 2: Initial sketch of the lighting study.

- Plans with proposed location of luminaires.
- Lighting study and calculation (3D modelling).
- Carrying out lighting calculations to adjust and validate the proposal and the lighting levels, sensations, consumption control and efficiency.
- Development of special projects and products.



Presentation and delivery of the project

Stage 3: Lighting levels represented in false colours.

- Luminaire location plan (PDF and CAD).
- Technical data sheets of the applied products.
- Families in Revit.
- Control and Smart Lighting services: Creation of groups and scenes, location of sensors, sketches and electrical diagrams, configuration, etc.



Technical support and customer service

Stage 4: Lighting simulation result of the final project.

- Follow-up of work and supervision of the installation and configurations.
- Incident management.
- Maintenance and repairs.
- Programming and commissioning of regulation and control systems.



32
Indoor



406
Outdoor



528
Smart Lighting

Technical data

In this catalogue we have selected the most relevant technical data for each of our products. You can obtain more detailed and complementary information in the downloadable technical data sheet on our website luxiona.com.

In addition, as we are constantly innovating, you will always find the latest updates and new products on our website

Notes

The power shown refers to the entire system (tolerance +/- 10%).
The luminous flux given refers to the LED light sources (tolerance +/- 10% depending on the colour temperature value).
The lumens (Lm) indicated are nominal. The actual lumens can be found in our downloadable technical data sheets downloadable from our website luxiona.com
Measurements are given in millimetres

Symbology

	Product complies with European directives		Dimmable 1-10V
	Earth connection		Dimmable DALI
	Class II		Emergency 1H
	Class III		LED
	Glow wire test 850°C		CRI Colour rendering index
	ENEC Certification		SDCM MacAdam Ellipse Standard colour deviation
	Circular recessed drill hole		Luminous flux maintenance
	Rectangular recessed drill hole		UGR Unified Glare Ratio
	IP Degree of protection against solids and liquids		Battery charger
	IK Degree of protection against impact		Maximum load Kg
	Orientation		TW (Tunable white)
	Swivel		RGBW
	DRIVER Equipment included		RGB
	DRIVER Equipment not included		No driver required
	Supply voltage		Presence Detector
	DC voltage		Novelty
	Direct current voltage		Luminaires designed by Luxiona's R+D team and designers.
	Mains frequency		
	Electronic equipment		

Light projection and installation typology

	Up & Down Indirect and direct light
	Down Direct light
	Asymmetric beam
	1 Beam
	2 Beams
	3 Beams
	4 Beams
	Wall installation
	Ceiling installation
	Floor installation
	Wooden floor installation
	Beam or elliptical angle
	Beam of light
	Double beam of light

Colour Temperature

Please ask us about the availability of finishes in the following colour temperatures:

- 2700 K
- 3000 K
- 4000 K
- 5000 K

Finishes

In addition to the standard colours, as we are manufacturers, we can customise the luminaire to suit your project.

	Gold
	Black RAL 9005
	Mirrored / metallised aluminium
	Stainless steel
	Light grey RAL 9006
	Dark grey RAL 9007
	Anthracite RAL 7016
	Silver grey
	White RAL 9010
	White RAL 9016
	Ceramic white RAL 9003
	Copper
	Satin Gold

Special LEDs

Within the possibilities of LED we incorporate light sources designed to offer excellent colour rendering and to enhance products in very specific segments.

	Fashion		Meat
	Bread and pastries		Fish and seafood
	Fruit and vegetables		Sausages

Indoor

Architectural

Architectural



36
Artshape
Line  



38
Artshape
Oval  



40
Artshape
Round  



44
Artshape
Six  



48
Artshape
SQ  




52
Artshape
Three  



56
Artshape
X  




58
Flying Surface
by Jean Nouvel



64
Mosaic  



68
Paralum
by Jean Nouvel



79
Patos
O  




80
Patos
K  



82
Patos
Line  

Tracklights

Tracklights			95 Lumbo 		95 Lumbo S  		100 Luxcan R 
	102 Luxcan C  		104 Luxcan Mini  		108 Vector 		117 Magnetick Track 
	118 Magnetick Spot S 		119 Magnetick Spot M 		119 Magnetick Spot Box 		120 Magnetick Box 
	121 Magnetick Glove 		124 T-Tris Line 		126 T-Tris Box 		128 T-Tris L/T 
	130 Tracks Three-Phase Track						

Recessed Downlights

Recessed Downlights			139 Contract Pro R 		140 Contract Pro SQ 		142 Contract Pro WW R 
	143 Contract Pro WW SQ 		148 Versatile Basic 		148 Versatile Soft 		150 Versatile Pinhole 



152
Pipe
S  



156
Beryl
New O 



160
Beryl
New O
Compact 



162
Beryl
O



164
Beryl
SQ



166
Beryl
New K 



172
Zas
Cube




174
Microdownlights
Microlinear 



178
Focus



181
Optics
Comfort 



182
Optics
Elite 



184
Angle 



186
Downled
C



187
Downled



188
Ecoled 

Indoor

Recessed Luminaires



192
Backlite 



200
Domino  



204
Panel
Europanel 



209
Agat  



211
Agat
Compact  



211
Agat
Deco Smooth
 



214
Softlight
Agat Pos  



218
Mosaic SQ
 

Index

Recessed Linears



222
X-Line Slim
G/K  



228
X-Line
G/K  



235
Agat
Slim  



235
Agat
Slim
Compact  

Surface & Suspended Downlights



238
Downled
CS 



240
Pipe 



244
Beryl
N New O 



248
Beryl
N New K 



252
Beryl
NO 



254
Beryl
NK 



256
Tubular 

LUXIONA troll

Indoor



263
Alda
Industrial  



263
Alda
Rustic  



263
Alda
Vintage  

Surface & Suspended Luminaires



266
Rubin
Look  




268
Rubin
Look
Compact  



270
Rubin
Look
Smooth IP44
 



272
Rubin
Look
Smooth
Compact  



276
Softlight
Rubin Pos  



278
Meteor
Compact 



280
Lotos 

Surface & Suspended Linears



286
X-Line
Slim Surface




290
X-Line
Slim 



294
X-Line
Slim Compact
 



296
X-Line
Slim UD  



303
X-Line  




309
X-Line
Compact  



310
Snake 



312
Shoptline



318
Universal
Line 



323
Matrix
Surface  



323
Matrix  



324
Matrix
Line  



325
Matrix
Up&Down  



325
Matrix
Up&Down Line
 

Wall Luminaires



328
Flex 



330
Eclipse



334
Tubular
W  



336
Luxwall
Deco  



338
Kubik
Wall Eco  



341
X-Line
X-Wall
New  




342
X-Line
X-Wall
K9  



343
X-Line
X-Wall
K9 Compact
 



344
X-Line
Wall UD  




346
Zas
Wall

Portable Luminaires



354
Palmera
by Jean Nouvel



350
Cava 



351
Cep 




352
Shiitake 


Linealed



361
Flexiled
Tajo




362
Flexiled
Po



364
Lightline
Rin



367
Neonled
Loa



367
Neonled
Sonora



369
Perfiled
Roncal



369
Perfiled
Loira



370
Perfiled
Vený



370
Perfiled
Mosela



371
Perfiled
Ica

Industrial



380
Prison  



383
Rubin
Sport New
 



383
Rubin
Industry Slight
 



385
Updoor
Mini  



387
Neptun
V2 



389
Neptun
Compact 



391
Neptun
Grp 



394
Nix



397
Agaline  



400
Agaline
3R  



403
Universal Line

Indoor

Index

LUXIONA troll

Outdoor

Projectors

			408 Ledmotiv 		410 Fasad Wall		412 Beam
	414 Beam Pool 		416 Fargo		418 Single		419 Single Pool 

Poles

			422 Riddle by Jean Nouvel		424 Kubik Pole 		426 Kubik Pole ODB 
	427 Kubik Pole L  		428 Kubik Out Wall  		429 Kubik Pole T 		430 Streetpark Premium
	432 Streetpark Small Premium		433 Streetpark Mini Compact		433 Streetpark M Premium		434 Streetpark S Premium
	435 Streetpark S Compact		436 Filar 				

Bollards

			440 Riddle by Jean Nouvel		442 Kubik Pole 		444 Kubik Pole ODB 
	445 Kubik 1D 		446 Kubik Pole 4D 		446 Kubik Pole Soft 		448 Kubik Pole 100 
	448 Kubik Pole Soft 100  		449 Kubik 2D 		450 Box 		452 Kube
	454 Mark		458 Polar		460 Tosca 		461 Tosca Slim 
	464 Solar 						

Recessed


	468 Fasad Floor ^N		471 E-Wall ^N		473 Kubik In ^N ²	Outdoor
	474 Bot ^N		477 Signal W ^N		478 Signal C ^N	
	480 Signal F WD ^N		481 Signal F Micro ^N		482 Num ^N	
	487 Small-Up		488 Small-Up WD		488 Small-DR	
	491 Ras R ^N		492 Ras SQ ^N		493 Dive ^N	
	484 Mini-Up ^N		489 Small-AD		494 Atlante ^N	

Surface


	498 Riddle by Jean Nouvel		501 Ras R ^N		501 Ras SQ ^N	Index
	503 Ametyst 500 ^N		503 Ametyst New ^N		504 Ametyst New Compact ^N	
	507 Owly C		507 Owly Dova ^N		508 Owly W	
	512 Solar ^N		513 Window ^N		515 Beryl Proof Wall ^N	
	517 Beryl N ^N		519 Kubik Wall Eco IP54 ^N		520 Kubik ^N	
	521 Kubik Ceiling Ecoled ^N		522 Pipe 65 ^N		525 Land S ^N	LUXIONA troll
					526 Land ^N	

Smart Lighting

On-Off



534
Sensors [N](#)



534
Power Supply
Devices

Triac



535
Switches
& Controls

1-10V



536
Switches
& Controls



536
Sensors [N](#)

Dali




539
Switches
& Controls



540
Sensors [N](#)




541
Auxiliary
Devices [N](#)



542
Power Supply
Devices [N](#)

Wireless-Bluetooth




545
Switches
& Controls [N](#)



546
Sensors [N](#)



546
Auxiliary
Devices [N](#)



547
Power Supply
Devices [N](#)

Wireless-RF



548
Switches
& Controls



548
Auxiliary
Devices

Alphabetical Index

A		E		64 Mosaic		310 Snake	
536	1-10V	330	Eclipse	218	Mosaic SQ	464/	Solar
397	Agaline	188	Ecoled	370	Mosela	512	
400	Agaline 3R	204	Europanel	N		367	Sonora
209	Agat	471	E-Wall	389	Neptun Compact	433	Streetpark M Premium
211	Agat Compact	F		391	Neptun Grp	433	Streetpark Mini Compact
211	Agat Deco Smooth	416	Fargo	387	Neptun V2	431	Streetpark Premium
214	Agat Pos	468	Fasad Floor	394	Nix	435	Streetpark S Compact
235	Agat Slim	410	Fasad Wall	482	Num	434	Streetpark S Premium
235	Agat Slim Compact	436	Filar	O		432	Streetpark Small Premium
263	Alda Industrial	328	Flex	534	ON-OFF	535/	Swiches
263	Alda Rustic	58	Flying Surface by Jean	181	Optics Comfort	536/	
263	Alda Vintage	Nouvel		182	Optics Elite	539/	
503	Ametyst 500	178	Focus	507	Owly C	545/	
503	Ametyst new	I		507	Owly Dova	548	
504	Ametyst new Compact	371	Ica	508	Owly W	T	
184	Angle	K		P		361	Tajo
36	Artshape Line	452	Kube	354	Palmera by Jean Nouvel	130	Three-Phase Track
38	Artshape Oval	520	Kubik	68	Paralum by Jean Nouvel	461	Tosca
40	Artshape Round	445	Kubik 1D	80	Patos K	461	Tosca slim
44	Artshape Six	449	Kubik 2D	82	Patos Line	535	TRIAC
48	Artshape SQ	521	Kubik Ceiling	79	Patos O	126	T-Tris Box
52	Artshape Three	521	Kubik Ceiling Ecoled	240	Pipe	128	T-Tris L/T
56	Artshape X	473	Kubik In	522	Pipe 65	124	T-Tris Line
375	Atena Compact	428	Kubik Out wall	152	Pipe S	256	Tubular
376	Atena Line	425/	Kubik Pole	362	Po	334	Tubular W
377	Atena Line New Industry	443		458	Polar	U	
494	Atlante	448	Kubik Pole 100	534/	Power supply devices	318/	Universal line
541/	Auxiliar devices	446	Kubik Pole 4D	542/		403	
546/		427	Kubik Pole L	547		385	Updoor Mini
547/		426	Kubik Pole ODB	380	Prison	V	
548		444	Kubik Pole ODB	R		359	Varta
B		446	Kubik Pole Soft	359	Ramis	108	Vector
192	Backlite	448	Kubik Pole Soft 100	491/	Ras R	370	Veny
412	Beam	429	Kubik Pole T	501		148	Versatile Basic
414	Beam Pool	338	Kubik Wall Eco	492/	Ras SQ	150	Versatile Pinhole
517	Beryl N	519	Kubik Wall Eco IP54	501		148	Versatile Soft
248	Beryl N New K	L		422/	Riddle by Jean Nouvel	W	
244	Beryl N New O	526	Land	440/		513	Window
166	Beryl New K	525	Land S	498		544	WIRELESS-BLUETOOTH
156	Beryl New O	408	Ledmotive	364	Rin	548	WIRELESS-RF
160	Beryl New O Compact	367	Loa	369	Roncal	X	
254	Beryl NK	369	Loira	383	Rubin Industry Slight	303	X-Line
252	Beryl NO	280	Lotos	266	Rubin Look	309	X-Line Compact
162	Beryl O	95	Lumbo	268	Rubin Look Compact	228	X-Line G/K
515	Beryl Proof Wall	95	Lumbo S	272	Rubin Look Smooth	290	X-Line Slim
516	Beryl Proof Wall K	102	Luxcan C	270	Rubin Look Smooth IP44	294	X-Line Slim Compact
164	Beryl SQ	104	Luxcan Mini	276	Rubin Pos	222	X-Line Slim G/K
474/	Bot	100	Luxcan R	381	Rubin Sport new	286	X-Line Slim Surface
510		505	Luxwall	S		296	X-Line Slim UD
450	Box	336	Luxwall Deco	360	Sena	344	X-Line Wall UD
C		M		534/	Sensors	342	X-Wall K9
350	Cava	120	Magnetick Box	536/		343	X-Wall K9 Compact
351	Cep	119	Magnetick Glove	540/		341	X-Wall New
139	Contract Pro R	119	Magnetick Spot Box	546		Z	
140	Contract Pro SQ	119	Magnetick Spot M	352	Shiitake	172	Zas Cube
142	Contract Pro WW R	118	Magnetick Spot S	312	Shopline	346	Zas Wall
143	Contract Pro WW SQ	117	Magnetick Track	478	Signal C		
535/	Controls	454	Mark	479	Signal F		
536/		323	Matrix	481	Signal F Micro		
539/		324	Matrix Line	480	Signal F WD		
545/		323	Matrix Surface	477	Signal W		
548		325	Matrix Up&down	418	Single		
D		325	Matrix Up&down Line	419	Single pool		
538	DALI	278	Meteor Compact	489	Small-AD		
493	Dive	174	Microlinear	488	Small-DR		
200	Domino	484	Mini-Up	487	Small-Up		
187	Downled			488	Small-Up WD		
186	Downled C						
238	Downled CS						

34
Artshape

64
Mosaic

78
Patos

58
Flying Surface





68
Paralum

Artshape by Luxiona Designers



The spaces we create have been designed by an inventive mind that masters a piece of the world, holding it, shaping it and making it spin until it leads to a conceptual intervention which is revealed through materials and structures. This way, architectural projects turn into artwork, blending different elements of design, light, colour and a variety of materials.

Creating modern spaces is an easy way to beautify architectural projects and it is Artshape line's purpose. Simple in design but artistic in style luminaires. Through Artshape line, Luxiona offers luminaires with geometrical designs that allow to create comfortable, modern and clean atmospheres offering beauty, harmony, symmetry and connection among spaces. It is the ideal combination of design, art and light.

Line N		SQ	
Oval N		Three	
Round		X N	
Six			

Artshape Line ^N
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X



Features

Modernistic architectural luminaire in shapes of popular geometrical figures and fashionable simple design. The luminaire is adjusted to be mounted on the ceiling or suspended. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. The perfectly even surface-emitting is made of a material with a very good light transmittance factor and has good diffusion parameters. This luminaire is aimed at premises/spaces/establishments of high stylistic requirements. It is perfect for hotel atrium lobbies/foyers, office reception desks, architecture studios, conference or meetings rooms or and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. A luminaire with direct/indirect light distribution is also available. These luminaires are characterized by an/their hermetically sealed cavity/space of with light sources (IP65), thanks to which dirtiness/fifth remains invisible.

		IP 40	IK 04
	CRI ≥80	SDCM 3	80000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA opal)

Installation: Suspended
Consult us for ceiling installation

LED personalisation
Check all types of LEDs on guide´s page 23



43W Up
52W Down

Lm (Up/Down) K Code
3461/4099 4000 115° 19.3000.3011



25W Down

Lm K Code
1544 4000 115° 19.3000.3001

50W Down


Lm K Code
3088 4000 115° 19.3000.3002

39 W



TW (Tunable white)

Lm K Code
2121 2700-6500 115° 19.3000.3007



28W Up
32W Down

Lm (Up/Down) K Code
2307/2733 4000 115° 19.3000.2012



16W Down

Lm K Code
1029 4000 115° 19.3000.2004

32W Down

Lm K Code
2059 4000 115° 19.3000.2005

27 W



TW (Tunable white)

Lm K Code
1435 2700-6500 115° 19.3000.2008



8W Down

Lm K Code
514 4000 115° 19.3000.1001

16W Down

Lm K Code
1029 4000 115° 19.3000.1002

Artshape Line
Artshape Oval 
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X



Features

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the ceiling or suspended. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. A luminaire with direct indirect light distribution is also available. These luminaires are characterized by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation.

		IP 40	IK 04
	CRI ≥80	SDCM 3	80000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA opal)

Installation: Suspended
Consult us for ceiling installation

LED personalisation
Check all types of LEDs on guide´s page 23



33W Up 95W Down


Lm (Up/Down) K ▲ Code
3043 / 9148 4000 115° 19.3002.3005



50W Down

Lm K ▲ Code
4395 4000 115° 19.3002.3002

Architectural



25W Up 71W Down

Lm (Up/Down) K ▲ Code
2341 / 6861 4000 115° 19.3002.2007




35W Down

Lm K ▲ Code
3293 4000 115° 19.3002.2004

70W Down

Lm K ▲ Code
6593 4000 115° 19.3002.2001

Indoor



19W Up 51W Down

Lm (Up/Down) K ▲ Code
1778 / 4634 4000 115° 19.3002.1009



28W Down

Lm K ▲ Code
2197 4000 115° 19.3002.1006

LUXIONA troll

Artshape Line
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X



Features

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the ceiling or suspended. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. A luminaire with direct indirect light distribution is also available. On individual request it is possible to make EDGE luminaires in larger sizes and in RGBW versions. These luminaires are characterized by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation.

CE

IK 04

LED

CRI ≥80

SDCM 3

DRIVER INCL.

220 240 V

50 60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA opal)

Installation: Suspended
Consult us for ceiling installation

LED personalisation
Check all types of LEDs on guide´s page 23



IP
40

50000h
L80B10

N

47W Up
93W Down

Lm (Up/Down) K Code
3600/7603 4000 115° 19.3003.3048



IP
40

80000h
L80B10

50W Down

Lm K Code
3088 4000 115° 19.3003.3024

93W Down



Lm K Code
6177 4000 115° 19.3003.3002

82 W



TW (Tunable white) N

Lm K Code
4430 2700-6500 115° 19.3003.3066



IP
40

50000h
L80B10

N

35W Up
71W Down

Lm (Up/Down) K Code
2731/5718 4000 115° 19.3003.2041



IP
40

80000h
L80B10

35W Down

Lm K Code
2316 4000 115° 19.3003.2007

70W Down



Lm K Code
4633 4000 115° 19.3003.2015

59 W



TW (Tunable white) N

Lm K Code
3182 2700-6500 115° 19.3003.2029



IP
40

50000h
L80B10

N

25W Up
51W Down

Lm (Up/Down) K Code
1968/3845 4000 115° 19.3003.1040



IP
40

80000h
L80B10

25W Down

Lm K Code
1544 4000 115° 19.3003.1001

50W Down


Lm K Code
3088 4000 115° 19.3003.1003 N

42 W



TW (Tunable white) N


Lm K Code
2246 2700 - 6500 115° 19.3003.1023

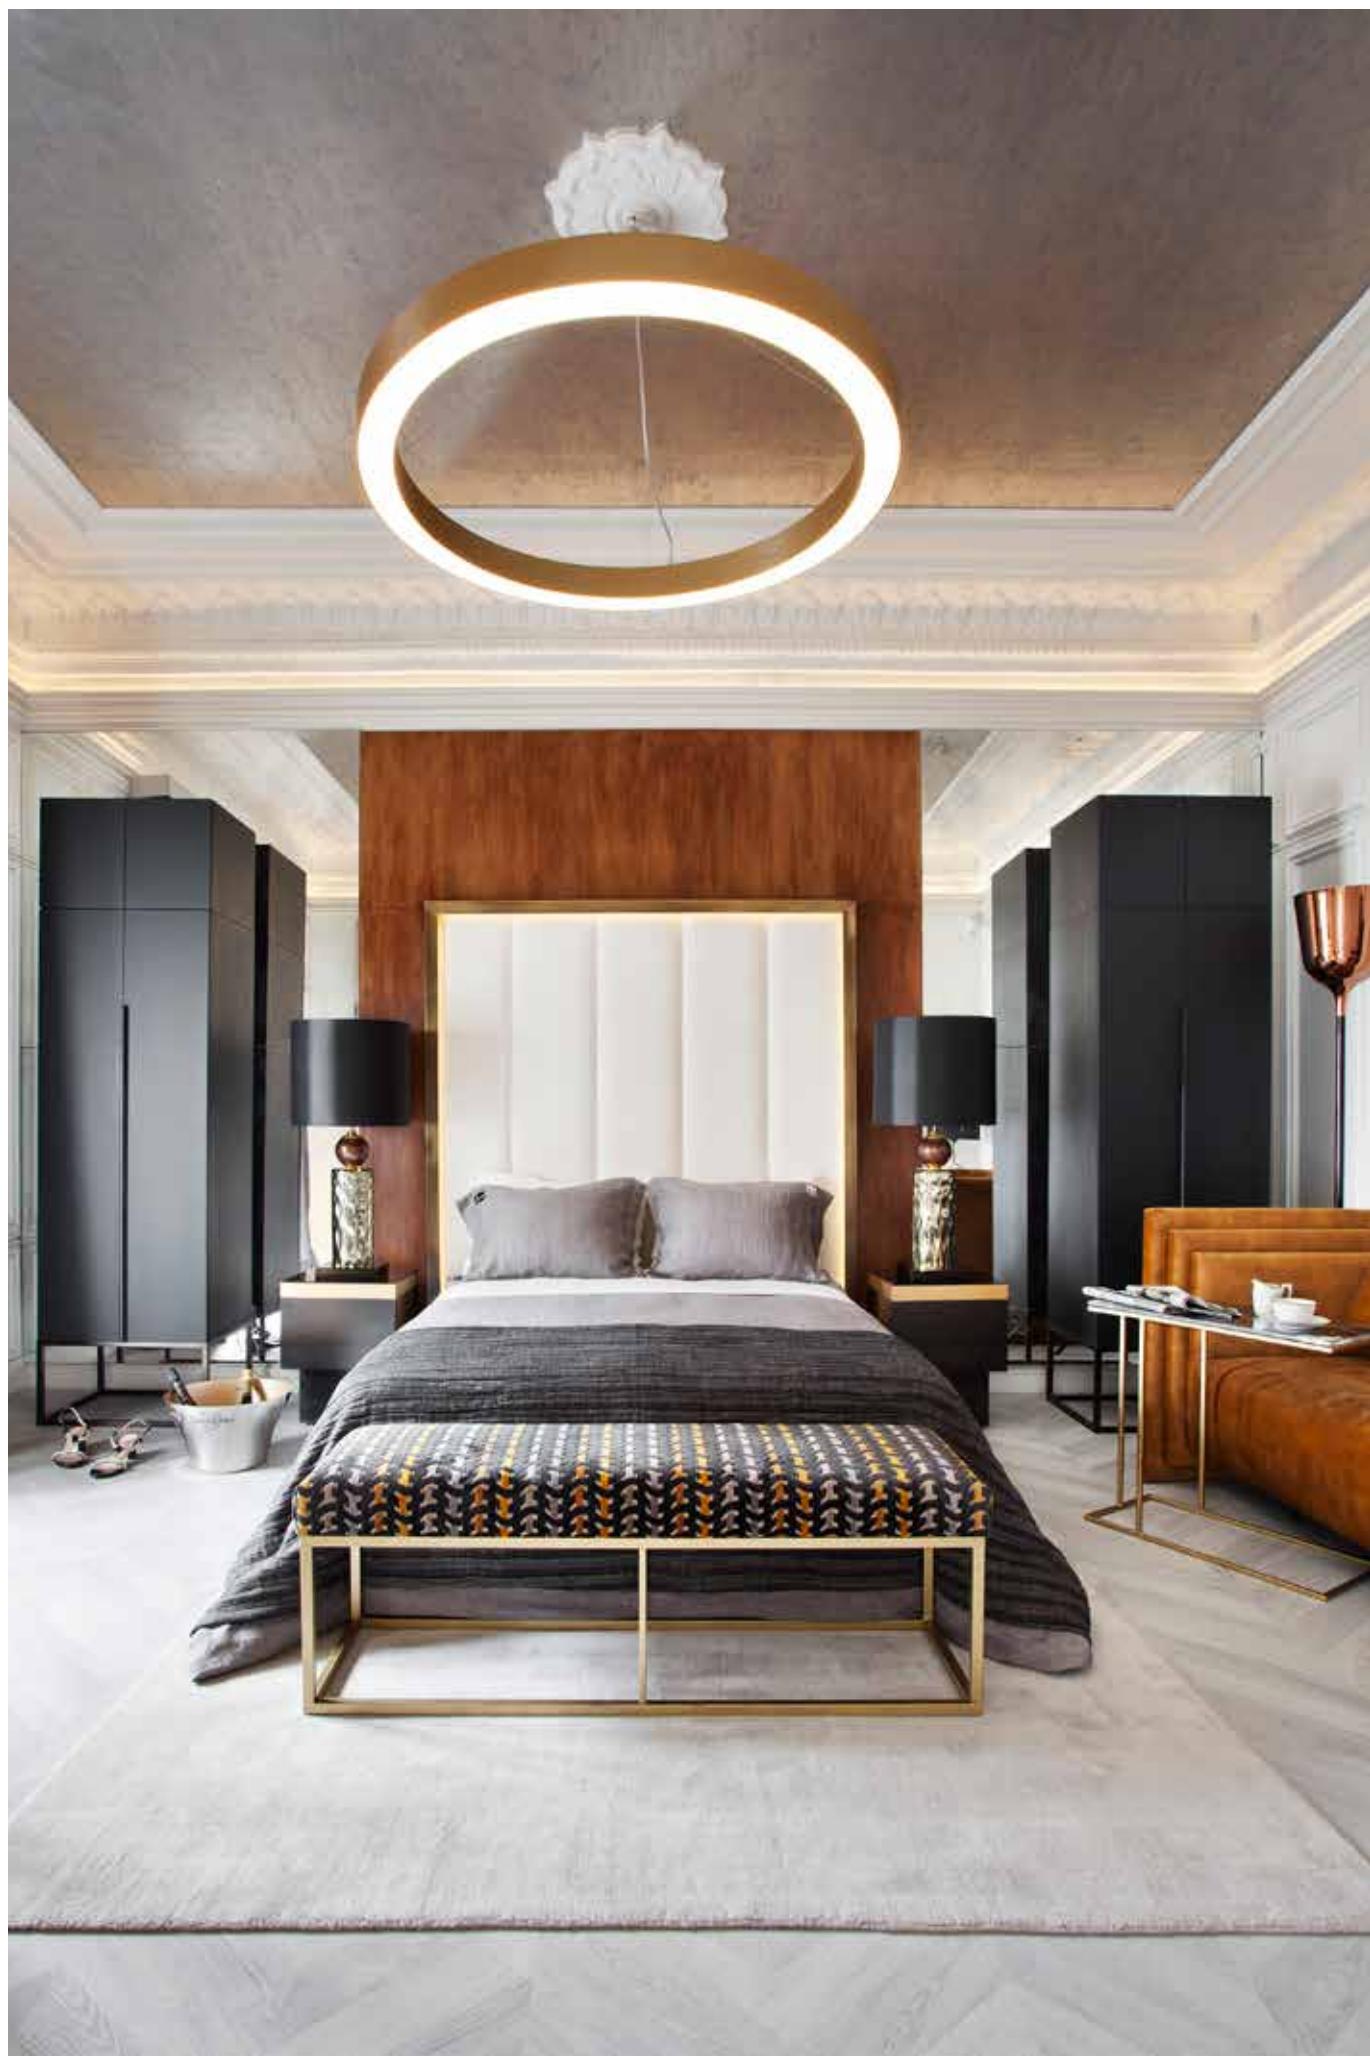

Artshape Line
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X

Artshape




 80000h
L80B10

IP 20 ^N

48W Up

197W Down

Lm (Up/Down) K  Code
4274/18813 4000 115° 19.3003.3065



 80000h
L80B10

IP 20 ^N

36W Up

114W Down


Lm (Up/Down) K  Code
3277/11054 4000 115° 19.3003.2073

 80000h
L80B10

IP 20 ^N

115W Down

Lm K  Code
10623 4000 115° 19.3003.2050



 80000h
L80B10

IP 20 ^N

25W Up

48W Down

Lm (Up/Down) K  Code
2402/4702 4000 115° 19.3003.1090

 80000h
L80B10

IP 20

35W Down

Lm K  Code
3297 4000 115° 19.3003.1049 ^N

47W Down

Lm K  Code
4404 4000 115° 19.3003.1056 ^N

74W Down

Lm K  Code
6960 4000 115° 19.3003.1064

Architectural

Indoor

LUXIONA troll

Artshape Line
Artshape Oval
Artshape Round
Artshape Six 

Artshape SQ
Artshape Three
Artshape X



Features

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the ceiling or suspended. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. A luminaire with direct indirect light distribution is also available. On individual request it is possible to make EDGE luminaires in larger sizes and in RGBW versions. These luminaires are characterized by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation.





IK

04



CRI

≥80

SDCM

3

DRIVER

INCL.

220

240

V

50

60

Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA opal)

Installation: Suspended
Consult us for ceiling installation

LED personalisation
Check all types of LEDs on guide´s page 23



50000h
L80B10

IP
40

N

45W Up
93W Down

Lm (Up/Down) K Code
3405/7603 4000 115° 19.3004.3012



80000h
L80B10

IP
40

50W Down

Lm K Code
3088 4000 115° 19.3004.3005

92W Down


Lm K Code
6177 4000 115° 19.3004.3001

77 W



TW (Tunable white) N

Lm K Code
4180 2700-6500 115° 19.3004.3008



50000h
L80B10

IP
40

N

34W Up
71W Down

Lm (Up/Down) K Code
2627/5702 4000 115° 19.3004.2014



80000h
L80B10

IP
40

35W Down

Lm K Code
2316 4000 115° 19.3004.2002

70W Down


Lm K Code
4633 4000 115° 19.3004.2007

57 W



TW (Tunable white) N

Lm K Code
3057 2700-6500 115° 19.3004.2009



50000h
L80B10

IP
40

N

24W Up
51W Down

Lm (Up/Down) K Code
1848/3802 4000 115° 19.3004.1015



80000h
L80B10

IP
40

25W Down

Lm K Code
1544 4000 115° 19.3004.1001

70W Down

Lm K Code
4633 4000 115° 19.3004.1009 N

40 W




TW (Tunable white) N

Lm K Code
2184 2700-6500 115° 19.3004.1010

Artshape Line
Artshape Oval
Artshape Round
Artshape Six ^N

Artshape SQ
Artshape Three
Artshape X



50000h
L80B10


IP
20

^N

44W
Up

174W
Down

Lm (Up/Down) K  Code
4096/16773 4000 115° 19.3004.3013



50000h
L80B10


IP
20

^N

34W
Up

101W
Down

Lm (Up/Down) K  Code
3160/9913 4000 115° 19.3004.2015



50000h
L80B10

IP
20

^N

25W
Up

43W
Down

Lm (Up/Down) K  Code
2281/4302 4000 115° 19.3004.1021



Jagiellonia Training Base. Białystok. Poland

Artshape Line
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X



Features

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the ceiling or suspended. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. A luminaire with direct indirect light distribution is also available. On individual request it is possible to make EDGE luminaires in larger sizes and in RGBW versions. These luminaires are characterized by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation.

CE

IK 04

LED

CRI ≥80

SDCM 3

DRIVER INCL.

220 240 V

50 60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA opal)

Installation: Suspended
Consult us for ceiling installation

LED personalisation
Check all types of LEDs on guide´s page 23



50000h
L80B10

IP
40

N

59W
Up

126W
Down

Lm (Up/Down) K  Code
4475/10137 4000 115° 19.3005.3016



80000h
L80B10

IP
40

65W
Down

Lm K  Code
4118 4000 115° 19.3005.3009

123W
Down


Lm K  Code
8236 4000 115° 19.3005.3002

100
W



TW (Tunable white) N

Lm K  Code
5428 2700-6500 115° 19.3005.3012



50000h
L80B10

IP
40

N

44W
Up

92W
Down

Lm (Up/Down) K  Code
3405/7603 4000 115° 19.3005.2020



80000h
L80B10

IP
40

50W
Down

Lm K  Code
3088 4000 115° 19.3005.2008

92W
Down


Lm K  Code
6177 4000 115° 19.3005.2002

75
W



TW (Tunable white) N

Lm K  Code
4056 2700-6500 115° 19.3005.2013



50000h
L80B10

IP
40

32W
Up

63W
Down

Lm (Up/Down) K  Code
2335/5069 4000 115° 19.3005.1027



80000h
L80B10

IP
40

32W
Down

Lm K  Code
2059 4000 115° 19.3005.1002

65W
Down

Lm K  Code
4118 4000 115° 19.3005.1010 N

52
W




TW (Tunable white) N

Lm K  Code
2808 2700-6500 115° 19.3005.1017



Artshape Line
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X




50000h
L80B10

IP
20

58W
Up

237W
Down

Lm (Up/Down) K Code
5314/22572 4000 115° 19.3005.3017




50000h
L80B10

IP
20

44W
Up

141W
Down

Lm (Up/Down) K Code
4096/13722 4000 115° 19.3005.2026



50000h
L80B10

IP
20

31W
Up

64W
Down

Lm (Up/Down) K Code
2845/6178 4000 115° 19.3005.1040

80000h
L80B10

IP
20

35W
Down

Lm K Code
3296 4000 115° 19.3005.1032

93W
Down

Lm K Code
8404 4000 115° 19.3005.1028

Artshape

Architectural

Indoor

LUXIONA troll

Artshape Line
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X



Features

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the ceiling or suspended. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. A luminaire with direct indirect light distribution is also available. On individual request it is possible to make EDGE luminaires in larger sizes and in RGBW versions. These luminaires are characterized by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation.

CE

IK 04

LED

CRI ≥80

SDCM 3

DRIVER INCL.

220 240 V

50 60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA opal)

Installation: Suspended
Consult us for ceiling installation

LED personalisation
Check all types of LEDs on guide´s page 23



50000h
L80B10

IP
40

N

44W
Up

91W
Down

Lm (Up/Down) K  Code
3405/7603 4000 115° 19.3006.3001



80000h
L80B10

IP
40

50W
Down

Lm K  Code
3088 4000 115° 19.3006.3005

92W
Down


Lm K  Code
6177 4000 115° 19.3006.3002

77
W



TW (Tunable white) N

Lm K  Code
4180 2700-6500 115° 19.3006.3009



50000h
L80B10

IP
40

N

34W
Up

71W
Down

Lm (Up/Down) K  Code
2627/5702 4000 115° 19.3006.2011



80000h
L80B10

IP
40

35W
Down

Lm K  Code
2316 4000 115° 19.3006.2008

70W
Down


Lm K  Code
4633 4000 115° 19.3006.2004

57
W



TW (Tunable white) N

Lm K  Code
3057 2700-6500 115° 19.3006.2002



50000h
L80B10

IP
40

24W
Up

51W
Down

Lm (Up/Down) K  Code
1848/3802 4000 115° 19.3006.1019



80000h
L80B10

IP
40

25W
Down

Lm K  Code
1544 4000 115° 19.3006.1002

38
W



TW (Tunable white) N


Lm K  Code
2059 2700-6500 115° 19.3006.1015



3D PRO - software design office, Łódź. Poland

Artshape Line
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X





50000h
L80B10

IP


20

N

44W
Up

131W
Down

Lm (Up/Down) K  Code
4043/12417 4000 115° 19.3006.3010





50000h
L80B10

IP


20

N

34W
Up

88W
Down

Lm (Up/Down) K  Code
3201/8497 4000 115° 19.3006.2001





50000h
L80B10

IP

20

N

24W
Up

49W
Down

Lm (Up/Down) K  Code
2253/4829 4000 115° 19.3006.1026



80000h
L80B10

IP

20

50W
Down

Lm K  Code
4582 4000 115° 19.3006.1021

Artshape

Architectural

Indoor

LUXIONA troll

Artshape Line
Artshape Oval
Artshape Round
Artshape Six

Artshape SQ
Artshape Three
Artshape X 



Features

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the ceiling or suspended. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. These luminaires are characterized by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation.

		IP 40	IK 04
	CRI ≥80	SDCM 3	80000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA opal)

Installation: Suspended
Consult us for ceiling installation

LED personalisation
Check all types of LEDs on guide´s page 23



31
W

Lm	K		Code
2059	4000	115°	19.3008.1003

62
W

Lm	K		Code
4118	4000	115°	19.3008.1007



Babyliss Paris, Warsaw. Poland

Flying Surface by Jean Nouvel





“ The most important thing is the nature of the item, its essence” Jean Nouvel

A visionary proposal arising from French designer Jean Nouvel and TROLL's alliance to create an interface between architecture and design attaining an experience where they both blend. The feeling of floating out in space is a part of the sensing experience of this luminaire that recalls a white canvas with many chances for creativity. A new concept where light and wall are conceived separately showing ambiguity from both its surface and its geometry.

Flying Surface by Jean Nouvel



Features

Flying Surface arises from the idea of creating light surfaces that give the feeling of being floating around in space. It provides highly even and balanced lighting that allows an excellent appearance of the lit up area and light to set a visual game of shapes and architectural pureness. Flying Surface's body is made of white-painted steel with an interior high pressure laminate (HPL) treatment. The exterior textile diffuser is white and polymer-based.

		IP 20	
	CRI ≥80	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz


Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Body: Iron
Diffuser: White textile outer diffuser with polymer base.

Installation: Wall / Ceiling / Suspended / Surface




11
W

Lm	K		Code
400	3000	106°	47/L0383DD
440	4000	106°	47/L0384DD




57
W

Lm	K		Code
2489	3000	106°	47/L0783DD
2627	4000	106°	47/L0784DD



227
W

Lm	K		Code
9901	3000	106°	47/L1383DD
10462	4000	106°	47/L1384DD



340
W


Lm	K		Code
14773	3000	106°	47/L2083DD
15601	4000	106°	47/L2084DD



Accessories Suspension set

47/02/33
Alignment tracks to attach to
modular ceilings. (4 units)

47/01/33
Suspension cable (max. 3 metres).
Height regulating pieces in
stainless steel and white fleuron.
(4 units)





Abertis Headquarters, Barcelona. Spain



Abertis, Madrid. Spain

Flying Surface by Jean Nouvel

Architectural

Indoor

LUXIONA troll

Mosaic

by Luxiona Designers

Architectural and stylish concept to create light patterns on modular ceilings and to evade monotony, offering a good general lighting system that combines lighting functionality with unique aesthetics thanks to the chance of using colour diffusers or LED.

Features

System aimed at 600 x 600 module suspended ceilings. It has a module and segment construction that includes the simple element, the curve, +-shaped element, L-shaped element and T-shaped element. The combination of these elements provides unlimited possibilities of indoor lighting arrangement. It is possible to combine the lighting

functionality and unique aesthetics of the interior. The location of segments can be altered anytime by turning particular plasterboards. Owing to the colour diffusers or LED RGB strips it is possible to obtain some extra colour effects. The LED system can be easily adjusted, which provides some extra energy savings.

CE



IP20
IP40



CRI
≥80

SDCM
3

100000h
L80B10

220
240

V

50
60

Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Steel sheet
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Recessed

Also available on other typology_page 218

LED personalisation
Check all types of LEDs on guide´s page 23


DRIVER
INCL.



10/14
W

Lm	K		Code
865/1235	3000	110°	19.3025.1002
910/1300	4000	110°	19.3025.1001

Mosaic




8/14
W

Lm	K		Code
617/1008	3000	110°	19.3025.2002
645/1008	4000	110°	19.3025.2001

Architectural

DRIVER
INCL.




10
W ^N

Lm	K		Code
910	4000	110°	19.3027.1001

14
W ^N

Lm	K		Code
1300	4000	110°	19.3027.1003

Indoor




15
W ^N

Lm	K		Code
1365	4000	110°	19.3028.1001

21
W ^N

Lm	K		Code
1950	4000	110°	19.3028.1003



19
W ^N

Lm	K		Code
1820	4000	110°	19.3026.1001

28
W ^N

Lm	K		Code
2600	4000	110°	19.3026.1003

LUXIONA troil

Accessories	OOSMPZ300-SZ Cutting template for Mosaic lineal	OOSME-ZEA1 Mosaic A1 Driver	OOSME-ZEB1 Mosaic B1 Driver
Please, chek out the data sheet for the correct driver selection.	OOSLR300-SZ Cutting template for Mosaic circular	OOSME-ZEA2 Mosaic A2 Driver	OOSME-ZEB2 Mosaic B2 Driver
	OOSME-EPM 300 mm connection cable	OOSME-ZEA3 Mosaic A3 Driver	OOSME-ZEB3 Mosaic B3 Driver
	OOSME-EPMA 750 mm connection cable	OOSME-ZEA4 Mosaic A4 Driver	OOSME-ZEB4 Mosaic B4 Driver



NFZ Szczecin Poland

Public Library, Konstancin-Jeziorna. Poland

Mosaic

Architectural

Indoor

LUXIONA troll

Paralum by Jean Nouvel

Luxiona has allied with architect and designer Jean Nouvel and created Paralum, an exclusive and innovative comprehensive ceiling and lighting system that evades the usual monotony of ceiling light systems. Paralum is a new system where art, design and lighting come together leading to a subtle game that shows the magic of light and shadow reflections.

"Paralum is both functional and sensory lighting" Jean Nouvel



Paralun by Jean Nouvel

Architectural




Indoor

Paralum by Jean Nouvel



Features


This lighting system is made up of a foldable ceiling of grille where it is possible to set general or accent lighting modules, as well as smoke detectors, sprinklers, air conditioners and acoustic elements which include a fire protection system. The French architect considers light a constructive material able to create atmospheres and feelings through its versatility.

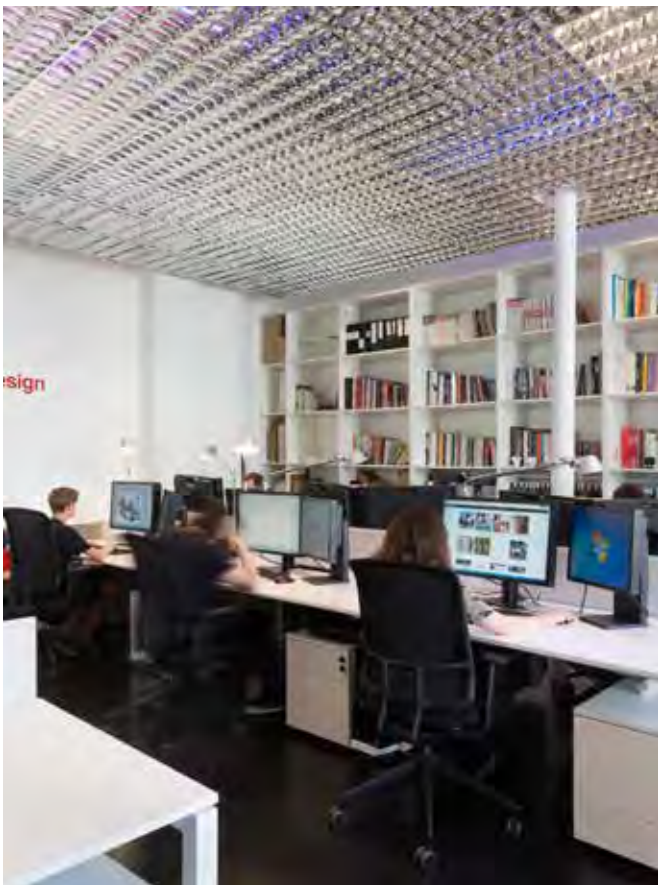

Jean Nouvel Studio Paris, France.

Modular ceiling system


The main idea is to create a decorative false ceiling made of 600x600mm modulated specular aluminum louvers. Louvers can be 600x300, 300x600 and 300x300. Louvers are fixed with special profiles joined together by metal pieces and springs. The ceiling system allows you to create a real ceiling with lighting, air conditioning, sprinkler, fire alarm and smoke detectors.

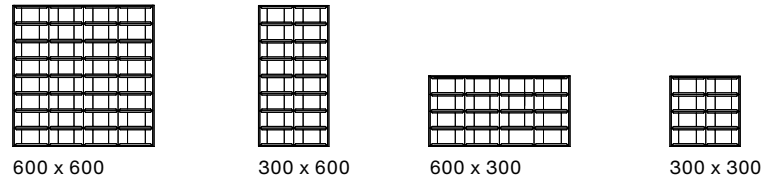

PARALUM lighting modules


General lighting modules

Luminaire of 2x24W T16 lamps. Made of stamped steel and aluminum, consists of a main black pressed steel frame. Two Optical system for each lamp. No direct light emission. All other support components are made of pressed steel plate painted in black. There are two versions of luminaire: adjustable DALI and DALI + emergency. The luminaire is installed on the roof PARALUM placing it, at the top of the roof.

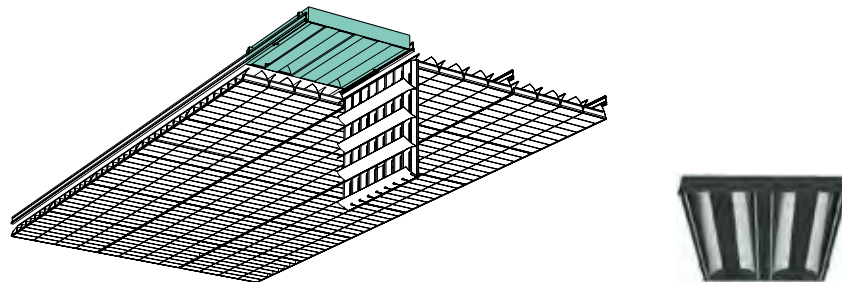

Accent lighting modules

Made of black stamped steel. Zas Cube is installed on the PARALUM ceiling. Maximum of 4 luminaires per module. "The luminaire is mounted on the upper inner side of the ceiling, supported on the profiles by lateral brackets protruding from the luminaire. The module is fixed to the profile by means of clips on the underside. The ZAS CUBE series single-lamp models are installed in this module".

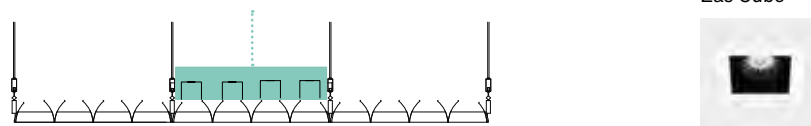

PARALUM modules

PARALUM air conditioning modules


Made of specular aluminum has the same dimensions as the basic grid 600x600 mm. It has the same appearance but at the top is designed to facilitate the exit of the air conditioning. The diffuser plenum is at the top. The diffuser and plenum is not included.

PARALUM Support for Sprinkler and smoke detectors modules


Made of stamped steel and painted black. The modules support sprinkler and smoke detector installed in the ceiling PARALUM placing them at the top inside of the roof, supporting them in the profiles and fixed with screws.

PARALUM Support for emergency lighting modules


Black Stamped Steel support for emergency. Installed on the top of the PARALUM ceiling. There are two versions depending on whether you want to install the banner profiles, longitudinally or transversal clip-in.




Louvers




CL1/0101/17
Specular aluminium
4x8 grid




CL1/0103/17
Specular aluminium
2x8 grid




CL1/0102/17
Specular aluminium
4x4 grid




CL1/0106/17
Specular aluminium
2x4 grid




Jonit elements




3100713600
Profile
L= 3600mm
Galvanized steel
15 pieces / box 4x8 grid




11PAR/512
Suspension
ROD M6 L = 1 M
Includes nut M6
Galvanized steel
2x8 grid




CL1/0201/00
Simple support 600
Galvanized steel



CL1/0204/00
Simple support 300
Galvanized steel



CL1/0202/00
Double support 600
Galvanized steel





CL1/0205/00
Double support 300
Galvanized steel



CL1/0203/00
Clamp mounting
Galvanized steel



General lighting modules



Lm	K		Code
2100	3000	indirect light	CL1/0306/04
2282	4000	indirect light	CL1/0307/04

CL1/ 0308/04

Perfiled al 550mm IP20 RGB OPAL 8W + reflector

CL1/ 0309/04

Perfiled al 1150mm IP20 RGB OPAL 15W + reflector

Paralum colour effects modules

CL1/0408/04

Perfiled bracket for Paralum installation - RGB (2 un)

CL1/0410/04

Adjustable joint-ball - Perfiled RGB


CL1/0409/04

Single-spacer bracket for installation 8W Perfiled perpendicular to support profiles

CL1/0411/04

Double-spacer bracket for installation 8W Perfiled perpendicular to support profiles


Accent lighting modules



For lamp LED




Lamp Holder	Code
GU 10	11.0452.1001.04



CL1/0303/04


Paralum installation accessory for Zas Cube Steel plate

Air conditioning modules




CL1/0105/17



Air grille conditioning Specular aluminium





Smoke and
Sprinkler detectors
modules



CL1/0401/04
Sprinkler
not included


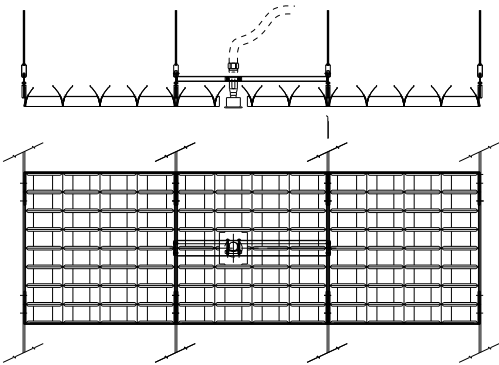


CL1/0402/04
Smoke detectors
not included

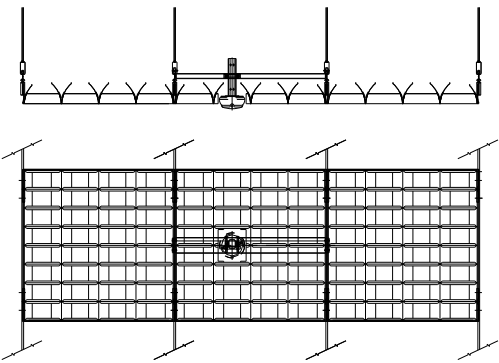


CL1/0104/17
Sprinkler grille and
smoke detector

Emergency lighting modules (longitudinally)





CL1/0404/04
Support
Emergency signaling flags

CL1/0107/17
Grid flag
Emergency signal
Longitudinal position

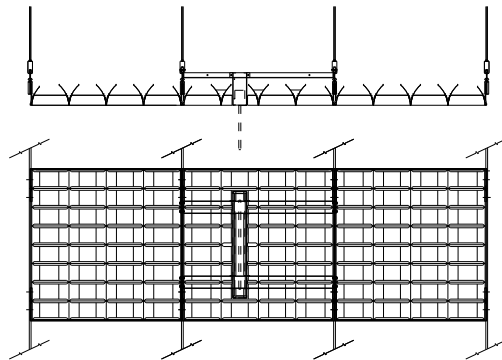


Emergency lighting modules (transversally)



CL1/0403/04
Support module
Emergency signaling flag
Transversal position
Pressed steel painted black

CL1/0108/17
Grid flag
Emergency signal
Cross position

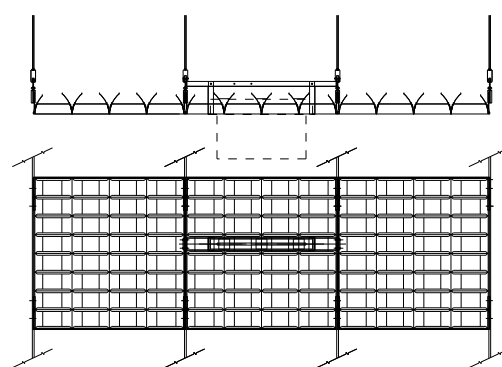

PARALUM module
side panel cladding

CL1/0209/04 STRAIGHT End cap 300 mm
CL1/0206/04 STRAIGHT End cap 600 mm
CL1/0210/04 STRAIGHT End cap 1200 mm

CL1/0217/04 End cap 300 mm EXTERIOR MITRE JOINT
CL1/0207/04 End cap 600 mm EXTERIOR MITRE JOINT

CL1/0215/04 End cap 300 mm INTERIOR MITRE JOINT
CL1/0214/04 End cap 600 mm INTERIOR MITRE JOINT


CL1/0211/04 End cap 300 mm DOUBLE INTERIOR + EXTERIOR MITRE JOINT
CL1/0212/04 End cap 600 mm DOUBLE INTERIOR + EXTERIOR MITRE JOINT

CL1/0218/04 End cap 300 mm DOUBLE INTERIOR MITRE JOINT
CL1/0208/04 End cap 600 mm DOUBLE INTERIOR MITRE JOINT

CL1/0216/04 End cap 300 mm DOUBLE EXTERIOR MITRE JOINT
CL1/0213/04 End cap 600 mm DOUBLE EXTERIOR MITRE JOINT



Flexible Offices Utopicus, Madrid. Spain

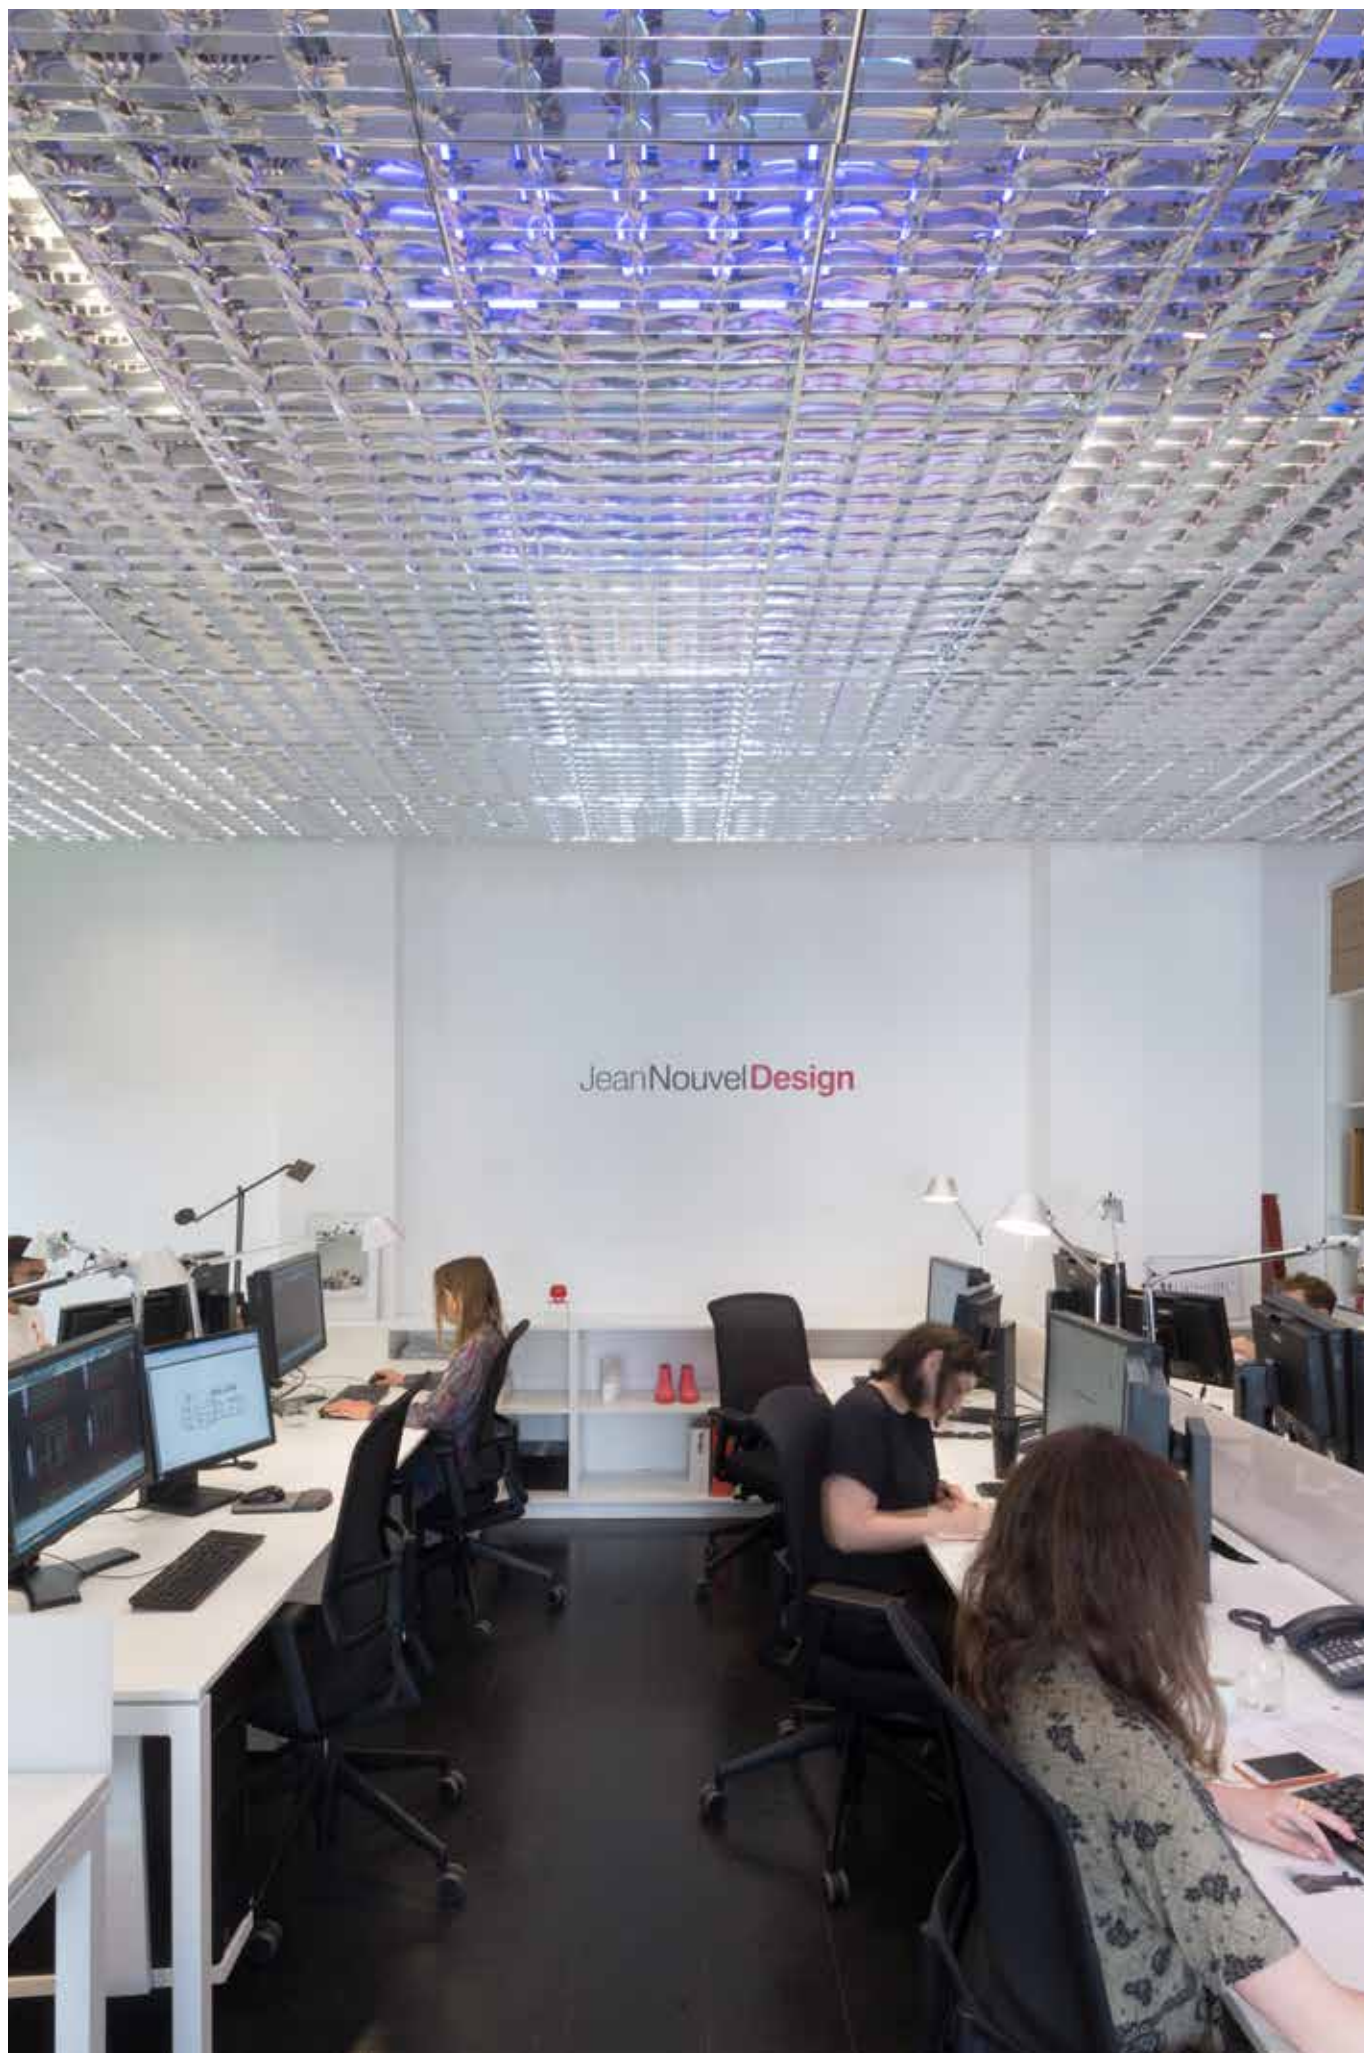



Features

Nowadays architectural lighting should embody an irreproachable style and high quality of lighting parameters. A luminaire is expected to be exceptional in respect of its design – simple and elegant. Patos is designed to light up galleries, museums, offices, clubs, restaurants and hotels; it gives any interior an individual modern character. Fitting designed for suspended plasterboard ceilings, adapted to befit the ceiling surface. Body made of aluminium profile, prismatic diffuser with a very good light transmittance coefficient and light diffusion parameters. Mounting should take place before the ceiling surface is finished. After the finishing work of the ceiling is applied, the diffuser is installed after the finish of the ceiling is applied.

		IP 20	IK 04
	CRI ≥80	SDCM 3	80000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.





Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PLX (PMMA opal)



Installation: Ceiling / Recessed

LED personalisation
Check all types of LEDs on guide´s page 23




13
W

Lm	K		Code
1008	4000	115°	19.0035.1001





37
W

Lm	K		Code
3024	4000	115°	19.0035.2001






65
W

Lm	K		Code
6048	4000	115°	19.0035.3001






71
W

Lm	K		Code
7056	4000	115°	19.0035.4001



111
W

Lm	K		Code
9072	4000	115°	19.0035.5001



169
W

Lm	K		Code
14112	4000	115°	19.0035.6001

Patos

Architectural

Indoor

LUXIONA troll



Features

Nowadays architectural lighting should embody an irreproachable style and high quality of lighting parameters. A luminaire is expected to be exceptional in respect of its design – simple and elegant. Patos is designed for lighting galleries, museums, offices, clubs, restaurants and hotels; it gives any interior individual modern character. Fitting designed for suspended plasterboard ceilings, adapted to befit the ceiling surface. Body made of aluminium profile, prismatic diffuser with very good light transmission coefficient and light diffusion parameters. Mounting should take place before the ceiling surface is finished. After the finishing work of the ceiling is ended, the diffuser is installed.

		IP 20	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.






Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PLX (PMMA opal)



Installation: Ceiling / Recessed

LED personalisation
Check all types of LEDs on guide´s page 23



17
W

Lm	K		Code
2044	4000	115°	19.3029.1001





26
W

Lm	K		Code
3067	4000	115°	19.3029.2001

34
W

Lm	K		Code
4089	4000	115°	19.3029.2003



77
W

Lm	K		Code
9201	4000	115°	19.3029.3001



Features

Nowadays architectural lighting should embody an irreproachable style and high quality of lighting parameters. A luminaire is expected to be exceptional in respect of its design – simple and elegant. Patos is designed for lighting galleries, museums, offices, clubs, restaurants and hotels; it gives any interior individual modern character. Fitting designed for suspended plasterboard ceilings, adapted to befit the ceiling surface. Body made of aluminium profile, prismatic diffuser with very good light transmission coefficient and light diffusion parameters. Mounting should take place before the ceiling surface is finished. After the finishing work of the ceiling is ended, the diffuser is installed.

		IP 20	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Steel sheet

Installation: Ceiling / Recessed


LED personalisation
Check all types of LEDs on guide´s page 23



Line EL Line S Line EP



N= 1, 2, 3...



Diffuser: PLX (PMMA opal)

Line EL



Lm	K		Code
951	4000	110°	19.3031.0101



Lm	K		Code
1555	4000	110°	19.3031.0115

Line S



Lm	K		Code
951	4000	110°	19.3031.0103



Lm	K		Code
1555	4000	110°	19.3031.0117

Line EP




Lm	K		Code
951	4000	110°	19.3031.0102




Lm	K		Code
1555	4000	110°	19.3031.0116

Line EL Line S Line EP




N= 1, 2, 3...



Diffuser: PLX (PMMA opal)

Line EL




Lm	K		Code
1902	4000	110°	19.3031.0301



Lm	K		Code
3111	4000	110°	19.3031.0325

Line S




Lm	K		Code
1902	4000	110°	19.3031.0303



Lm	K		Code
3111	4000	110°	19.3031.0327

Line EP




Lm	K		Code
1902	4000	110°	19.3031.0302



Lm	K		Code
3111	4000	110°	19.3031.0326

Patos Line N




N= 1, 2, 3...

 4223 x 80 (3 elements)

Diffuser: PLX (PMMA opal)

Line EL




21
W

Lm	K		Code
2378	4000	110°	19.3031.0401

35
W

Lm	K		Code
3889	4000	110°	19.3031.0427

Line S




21
W

Lm	K		Code
2378	4000	110°	19.3031.0403

35
W

Lm	K		Code
3889	4000	110°	19.3031.0429

Line EP




21
W

Lm	K		Code
2378	4000	110°	19.3031.0402

35
W

Lm	K		Code
3889	4000	110°	19.3031.0428




N= 1, 2, 3...

 5063 x 80 (3 elements)

Diffuser: PLX (PMMA opal)

Line EL




26
W

Lm	K		Code
2854	4000	110°	19.3031.0501

42
W

Lm	K		Code
4667	4000	110°	19.3031.0510

Line S




26
W

Lm	K		Code
2854	4000	110°	19.3031.0503

42
W

Lm	K		Code
4667	4000	110°	19.3031.0512

Line EP



26
W

Lm	K		Code
2854	4000	110°	19.3031.0502

42
W

Lm	K		Code
4667	4000	110°	19.3031.0511





Diffuser: PLX (PMMA opal)



Lm	K		Code
951	4000	110°	19.3030.0101





Lm	K		Code
1555	4000	110°	19.3030.0104



Lm	K		Code
1902	4000	110°	19.3030.0301





Lm	K		Code
3111	4000	110°	19.3030.0307



Lm	K		Code
2378	4000	110°	19.3030.0401



Lm	K		Code
3889	4000	110°	19.3030.0406




Lm	K		Code
2854	4000	110°	19.3030.0501



Lm	K		Code
4667	4000	110°	19.3030.0506

Patos Line N



Diffuser: PLX (PMMA opal)

13
W

Lm	K	Beam	Connector	Code
1427	4000	110°	TYPE-LC	19.0032.0301
1427	4000	110°	TYPE-LD	19.0032.0401
1427	4000	110°	TYPE-LE	19.0032.0501
1427	4000	110°	TYPE-LF	19.0032.0601

21
W

Lm	K	Beam	Connector	Code
2333	4000	110°	TYPE-LC	19.0032.0313
2333	4000	110°	TYPE-LD	19.0032.0413
2333	4000	110°	TYPE-LE	19.0032.0513
2333	4000	110°	TYPE-LF	19.0032.0613


Diffuser: Micro-PRM (micro-prismatic diffuser PMMA)

13
W UGR
<19

Lm	K	Beam	Connector	Code
1597	4000	90°	TYPE-LC	19.0032.0305
1597	4000	90°	TYPE-LD	19.0032.0405
1597	4000	90°	TYPE-LE	19.0032.0505
1597	4000	90°	TYPE-LF	19.0032.0606

21
W UGR
<19

Lm	K	Beam	Connector	Code
2612	4000	90°	TYPE-LC	19.0032.0309
2612	4000	90°	TYPE-LD	19.0032.0409
2612	4000	90°	TYPE-LE	19.0032.0509
2612	4000	90°	TYPE-LF	19.0032.0609



Diffuser: PLX (PMMA opal)

17
W

Lm	K	Beam	Connector	Code
1902	4000	110°	TYPE-LA	19.0032.0101
1902	4000	110°	TYPE-LB	19.0032.0201

28
W

Lm	K	Beam	Connector	Code
3111	4000	110°	TYPE-LA	19.0032.0114
3111	4000	110°	TYPE-LB	19.0032.0214


Diffuser: Micro-PRM (micro-prismatic diffuser PMMA)

17
W UGR
<19

Lm	K	Beam	Connector	Code
2130	4000	90°	TYPE-LA	19.0032.0105
2130	4000	90°	TYPE-LB	19.0032.0205

28
W UGR
<19

Lm	K	Beam	Connector	Code
3483	4000	90°	TYPE-LA	19.0032.0110
3483	4000	90°	TYPE-LB	19.0032.0210


 1127/605 x 80

Diffuser: PLX (PMMA opal)

26
W

Lm	K		Connector	Code
2854	4000	110°	TYPE-TA	19.0033.0101
2854	4000	110°	TYPE-TB	19.0033.0201
2854	4000	110°	TYPE-TC	19.0033.0301

42
W

Lm	K		Connector	Code
4667	4000	110°	TYPE-TA	19.0033.0109
4667	4000	110°	TYPE-TB	19.0033.0209
4667	4000	110°	TYPE-TC	19.0033.0309


Diffuser: Micro-PRM (micro-prismatic diffuser PMMA)

26
W UGR
<19

Lm	K		Connector	Code
3195	4000	90°	TYPE-TA	19.0033.0103
3195	4000	90°	TYPE-TB	19.0033.0203
3195	4000	90°	TYPE-TC	19.0033.0303

42
W UGR
<19

Lm	K		Connector	Code
5224	4000	90°	TYPE-TA	19.0033.0111
5224	4000	90°	TYPE-TB	19.0033.0211
5224	4000	90°	TYPE-TC	19.0033.0311


 1127/1127 x 80

Diffuser: PLX (PMMA opal)

34
W

Lm	K		Connector	Code
3805	4000	110°	TYPE-X	19.0034.0001

56
W

Lm	K		Connector	Code
6222	4000	110°	TYPE-X	19.0034.0007


Diffuser: Micro-PRM (micro-prismatic diffuser PMMA)

34
W UGR
<19

Lm	K		Connector	Code
4260	4000	90°	TYPE-X	19.0034.0003

56
W UGR
<19

Lm	K		Connector	Code
6966	4000	90°	TYPE-X	19.0034.0005

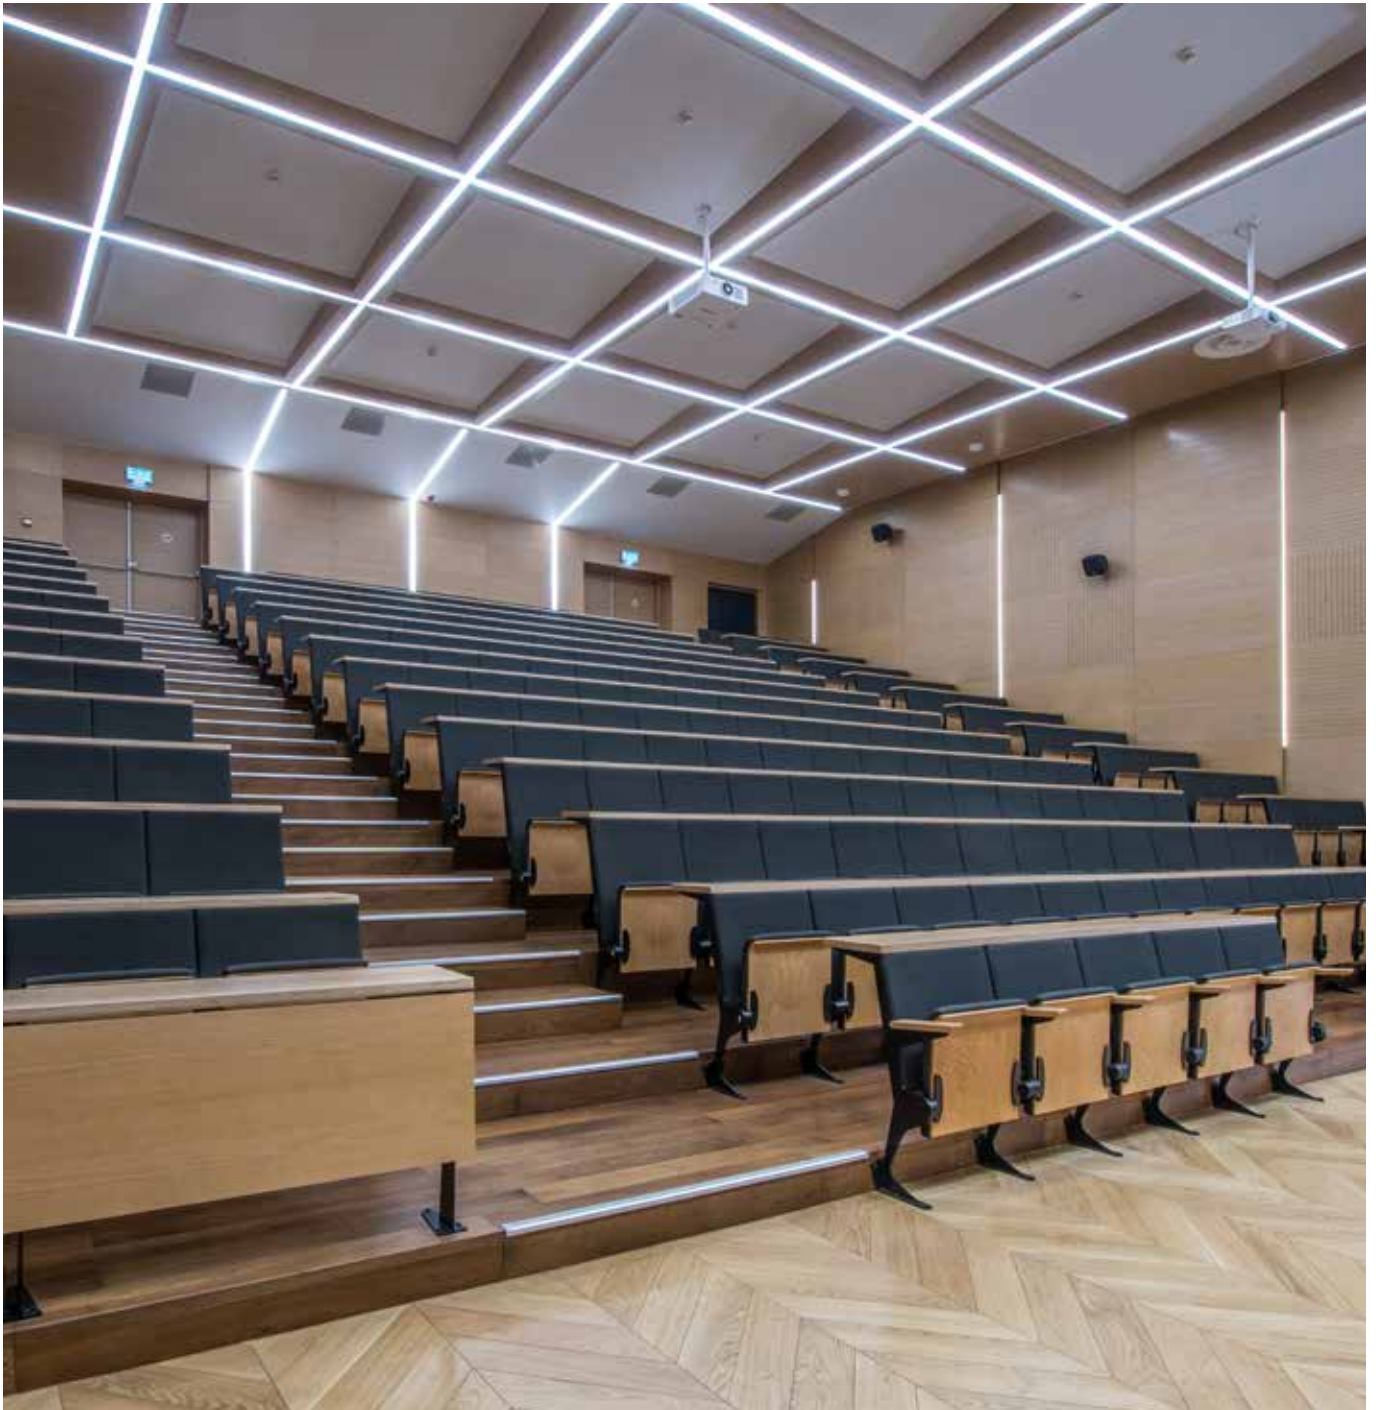

Auditorium of Institute of Physics University of Mikolaj Kopernik. Toruń. Poland



92
Lumbo

108
Vector

122
T-Tris

98
Luxcan

112
Magnetick

130
Tracks


Lumbo by Luxiona Designers



Spherical spotlight conceived for plans where visual density is an important factor to be taken into account. Primarily designed for living in camps so that there is no visual saturation of the architectural ensemble. Lumbo plays the key role of lighting space while providing balance and harmony and avoiding the visual disproportion that conventional spotlights' orientation produces. Lumbo has an innovative design with the newest technological improvements. It includes new generation Premium White LEDs with high colour rendition that makes it excellent to light up spaces at retail stores, exhibitions, hotels, etc. Thanks to "Total Orientation System" it can be handled manually so that it spins 355° or leans 90° .

Lumbo

Tracklights

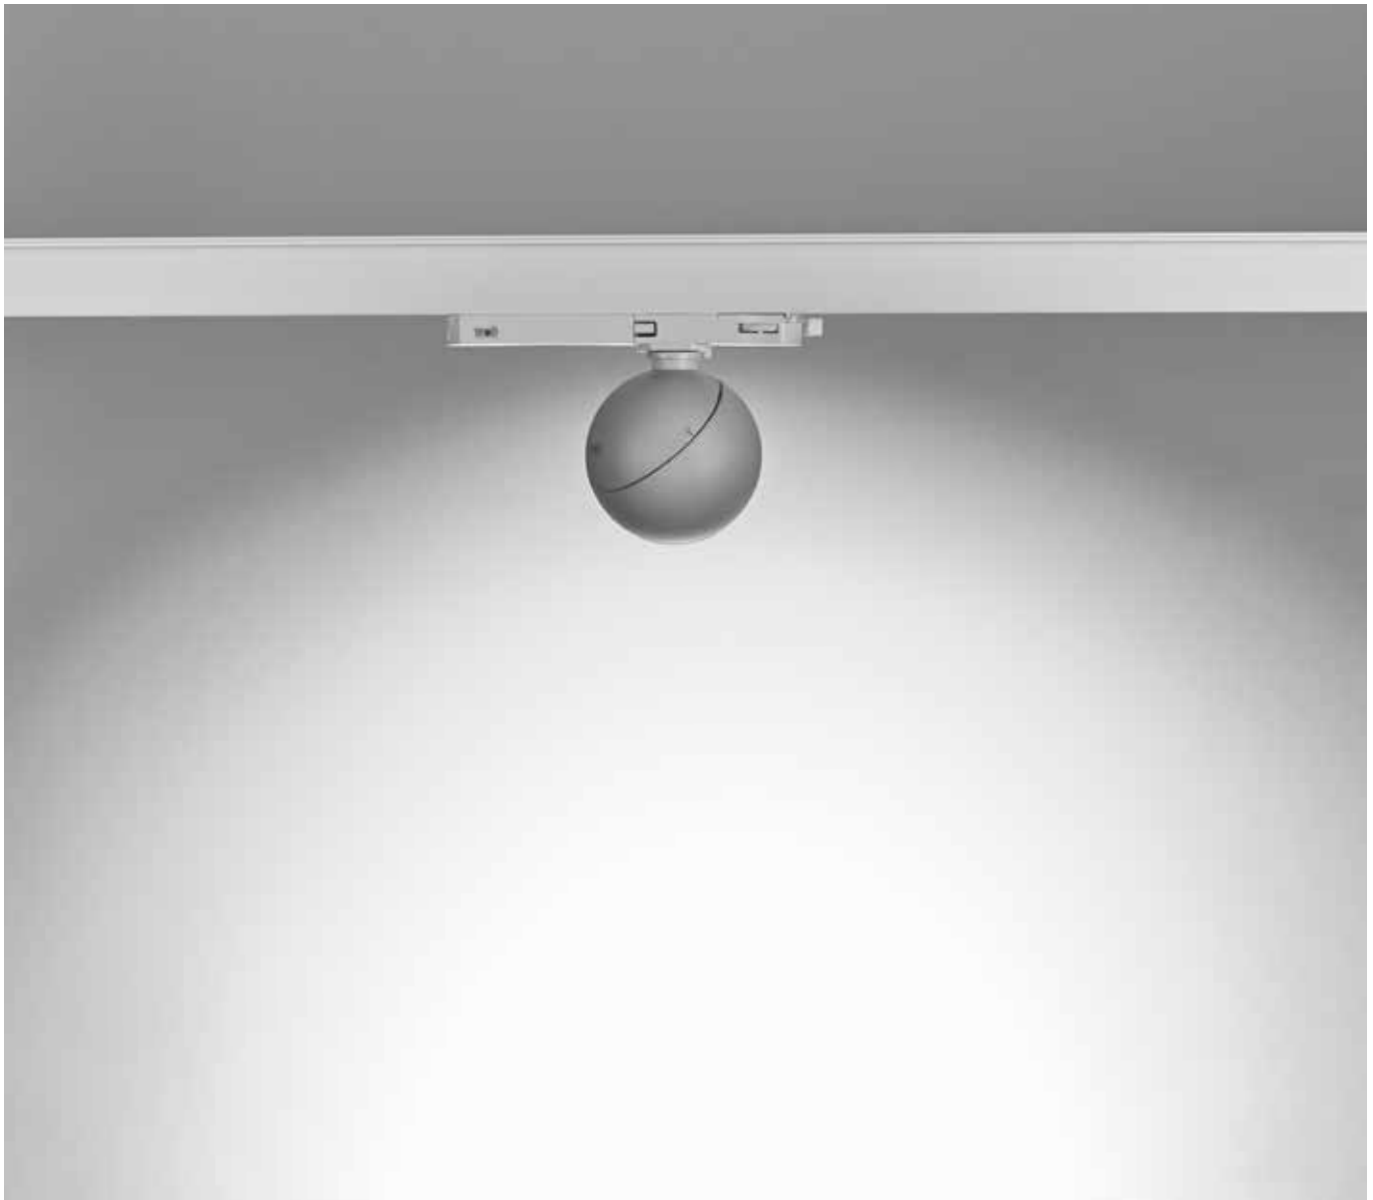

Indoor

LUXIONA troll



Features

Spherical injected steel monoblock spotlights with high quality finishes and an optical system based on highly efficient spotlights. The whole body works as a heat sink, improving the working efficiency of the LED to optimize consumption. The equipment is integrated into the three-phase adapter.

CE

IP
20

850°

90°

355°

LED

CRI
≥90

SDCM
3

60000h
L80B10

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options. (8W not available)

Standard finishes
Add needed finish to complete the product reference.

.04

.63

Other finishes

.25

.27

.85

.92


Ask us for custom colours.

Body: Aluminium

Installation: Three-phase track

LED personalisation
Check all types of LEDs on guide´s page 23

Lumbo




15
W

Lm	K		Code
1518	3000	15°	11.1426.1311
1491	3000	25°	11.1426.1321
1463	3000	40°	11.1426.1341
1668	4000	15°	11.1426.1411
1641	4000	25°	11.1426.1421
1613	4000	40°	11.1426.1441

31
W

Lm	K		Code
3128	3000	15°	11.1426.3311
3072	3000	25°	11.1426.3321
2983	3000	40°	11.1426.3341
3378	4000	15°	11.1426.3411
3322	4000	25°	11.1426.3421
3233	4000	40°	11.1426.3441

Lumbo S



11
W

Lm	K		Code
865	3000	15°	11.2026.1311
851	3000	24°	11.2026.1321
851	3000	36°	11.2026.1331
931	4000	15°	11.2026.1411
916	4000	24°	11.2026.1421
914	4000	36°	11.2026.1431

15
W

Lm	K		Code
1144	3000	15°	11.2026.2311
1128	3000	24°	11.2026.2321
1121	3000	36°	11.2026.2331
1219	4000	15°	11.2026.2411
1198	4000	24°	11.2026.2421
1202	4000	36°	11.2026.2431



Accessories



11.1426.0001
Honeycomb Mesh Lumbo Ø75



11.1426.0002 ^N
Clear diffuser for Lumbo 075mm

11.2026.0001 ^N
Honeycomb Mesh Lumbo S
Ø45mm

Lumbo

Tracklights

Indoor

LUXIONA **troll**





Lumbo

Tracklights



Indoor

LUXIONA troll

Luxcan by Luxiona Designers



Light is an element which is always present but seldom becomes noticeable; it is when it works best that we are unaware of its presence. It is from this idea of lighting that Luxcan family is born, with solutions developed to attain a high quality lit up projection able to perfectly fit with any architectural space. Invisible products that create visible indoor atmospheres. Luxcan spotlights allow it is space who tells the story, without having an influence on its aesthetics and focusing on making the scene possible and highlighting what has to be emphasized. This, together with their diverse optics, make this family's solutions perfect for accent lighting of commercial spaces, window dressing and big indoor spaces.

Luxcan R

Luxcan C

Luxcan Mini





Features

This cylindrical spotlights family has a timeless design and a great simplicity in shape that allows a high degree of integration into the aesthetics of any space.

Luxcan R combines the most sophisticated LED light sources with diverse optics, which makes it proper for accent lighting at commercial areas, shop windows o big indoor spaces.

CE

IP
20

850°

90°

355°

LED

CRI
≥80

SDCM
3

50000h
L70B10

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.04

.63

Other finishes

.25

.27

.85


.92

Ask us for custom colours.

Body: Aluminium

Installation: Three-phase track

LED personalisation
Check all types of LEDs on guide´s page 23

15
W

Lm	K	▲	Code
1139	3000	12°	11.1523.8362
1109	3000	24°	11.1523.8364
1214	3000	36°	11.1523.8366
1229	4000	12°	11.1523.8462
1184	4000	24°	11.1523.8464
1298	4000	36°	11.1523.8466

29
W

Lm	K	▲	Code
2618	3000	12°	11.1523.8312
2549	3000	24°	11.1523.8324
2792	3000	36°	11.1523.8336
2815	4000	12°	11.1523.8412
2793	4000	24°	11.1523.8424
2985	4000	36°	11.1523.8436



Accessories

.04

11.1523.0002
Honeycomb Mesh

.04

.63

2427
Surface base for spotlights with
tree-phase adapter



Features

The insertion of the transformer into the adapter itself allows a smaller size and a higher integration degree in any space.

Luxcan C universal appearance makes it possible for light to be both invisible and essential, combining the most sophisticated LED light sources with diverse optics, which makes it proper for accent lighting at commercial areas, shop windows o big indoor spaces.

		IP 20	 850°	 90°	 355°
	CRI ≥90	SDCM 3	60000h L80B10		

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

--	--

Other finishes


--	--	--	--

Ask us for custom colours.

Body: Aluminium

Installation: Three-phase track

LED personalisation
Check all types of LEDs on guide´s page 23



15
W

Lm	K		Code
1493	3000	15°	11.1710.1311
1514	3000	25°	11.1710.1321
1485	3000	40°	11.1710.1341
1641	4000	15°	11.1710.1411
1663	4000	25°	11.1710.1421
1632	4000	40°	11.1710.1441

27
W

Lm	K		Code
2425	3000	15°	11.1710.2311
2452	3000	25°	11.1710.2321
2404	3000	40°	11.1710.2341
2665	4000	15°	11.1710.2411
2694	4000	25°	11.1710.2421
2642	4000	40°	11.1710.2441

42
W N

Lm	K		Code
3550	3000	15°	11.1710.3311
3612	3000	25°	11.1710.3321
3597	3000	40°	11.1710.3341
3901	4000	15°	11.1710.3411
3969	4000	25°	11.1710.3421
3919	4000	40°	11.1710.3441



Accessories



11.1710.0004
Honeycomb Mesh



Features

Body made of Extruded aluminium, it sets up a single axis orientation system that allows tilting of 90° and rotation of 355°. The driver is integrated into the adapter, remaining hidden in the track. This allows to minimize the volume that the projector occupies in the space, maximizing the “Vision Free System” concept. Optical system made up of a PMMA lens, which defines a perfect beam, without halos. Version for GU10 retrofit lamp available.

CE

IP
20

850°

90°

355°

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.04

.63

Other finishes

.25

.27

.85

.92

Ask us for custom colours.

Body: Aluminium

Installation: Three-phase track


LED personalisation
Check all types of LEDs on guide´s page 23



CRI
≥90

SDCM
3

60000h
L80B10




15
W

Lm	K	Beam angle	Code
1129	2700	15°	11.1839.1921
1138	2700	32°	11.1839.1923
1114	2700	50°	11.1839.1925
1219	3000	15°	11.1839.1931
1229	3000	32°	11.1839.1933
1203	3000	50°	11.1839.1935
1317	4000	15°	11.1839.1941
1328	4000	32°	11.1839.1943
1300	4000	50°	11.1839.1945



Light source not included



15W
max.



Lamp Holder	Code
GU 10	11.2027.0001



Accessories




2427
Surface base for spotlights
with three-phase adapter, for
11.2027.0001

Luxcan

Tracklights

Indoor

LUXIONA troll

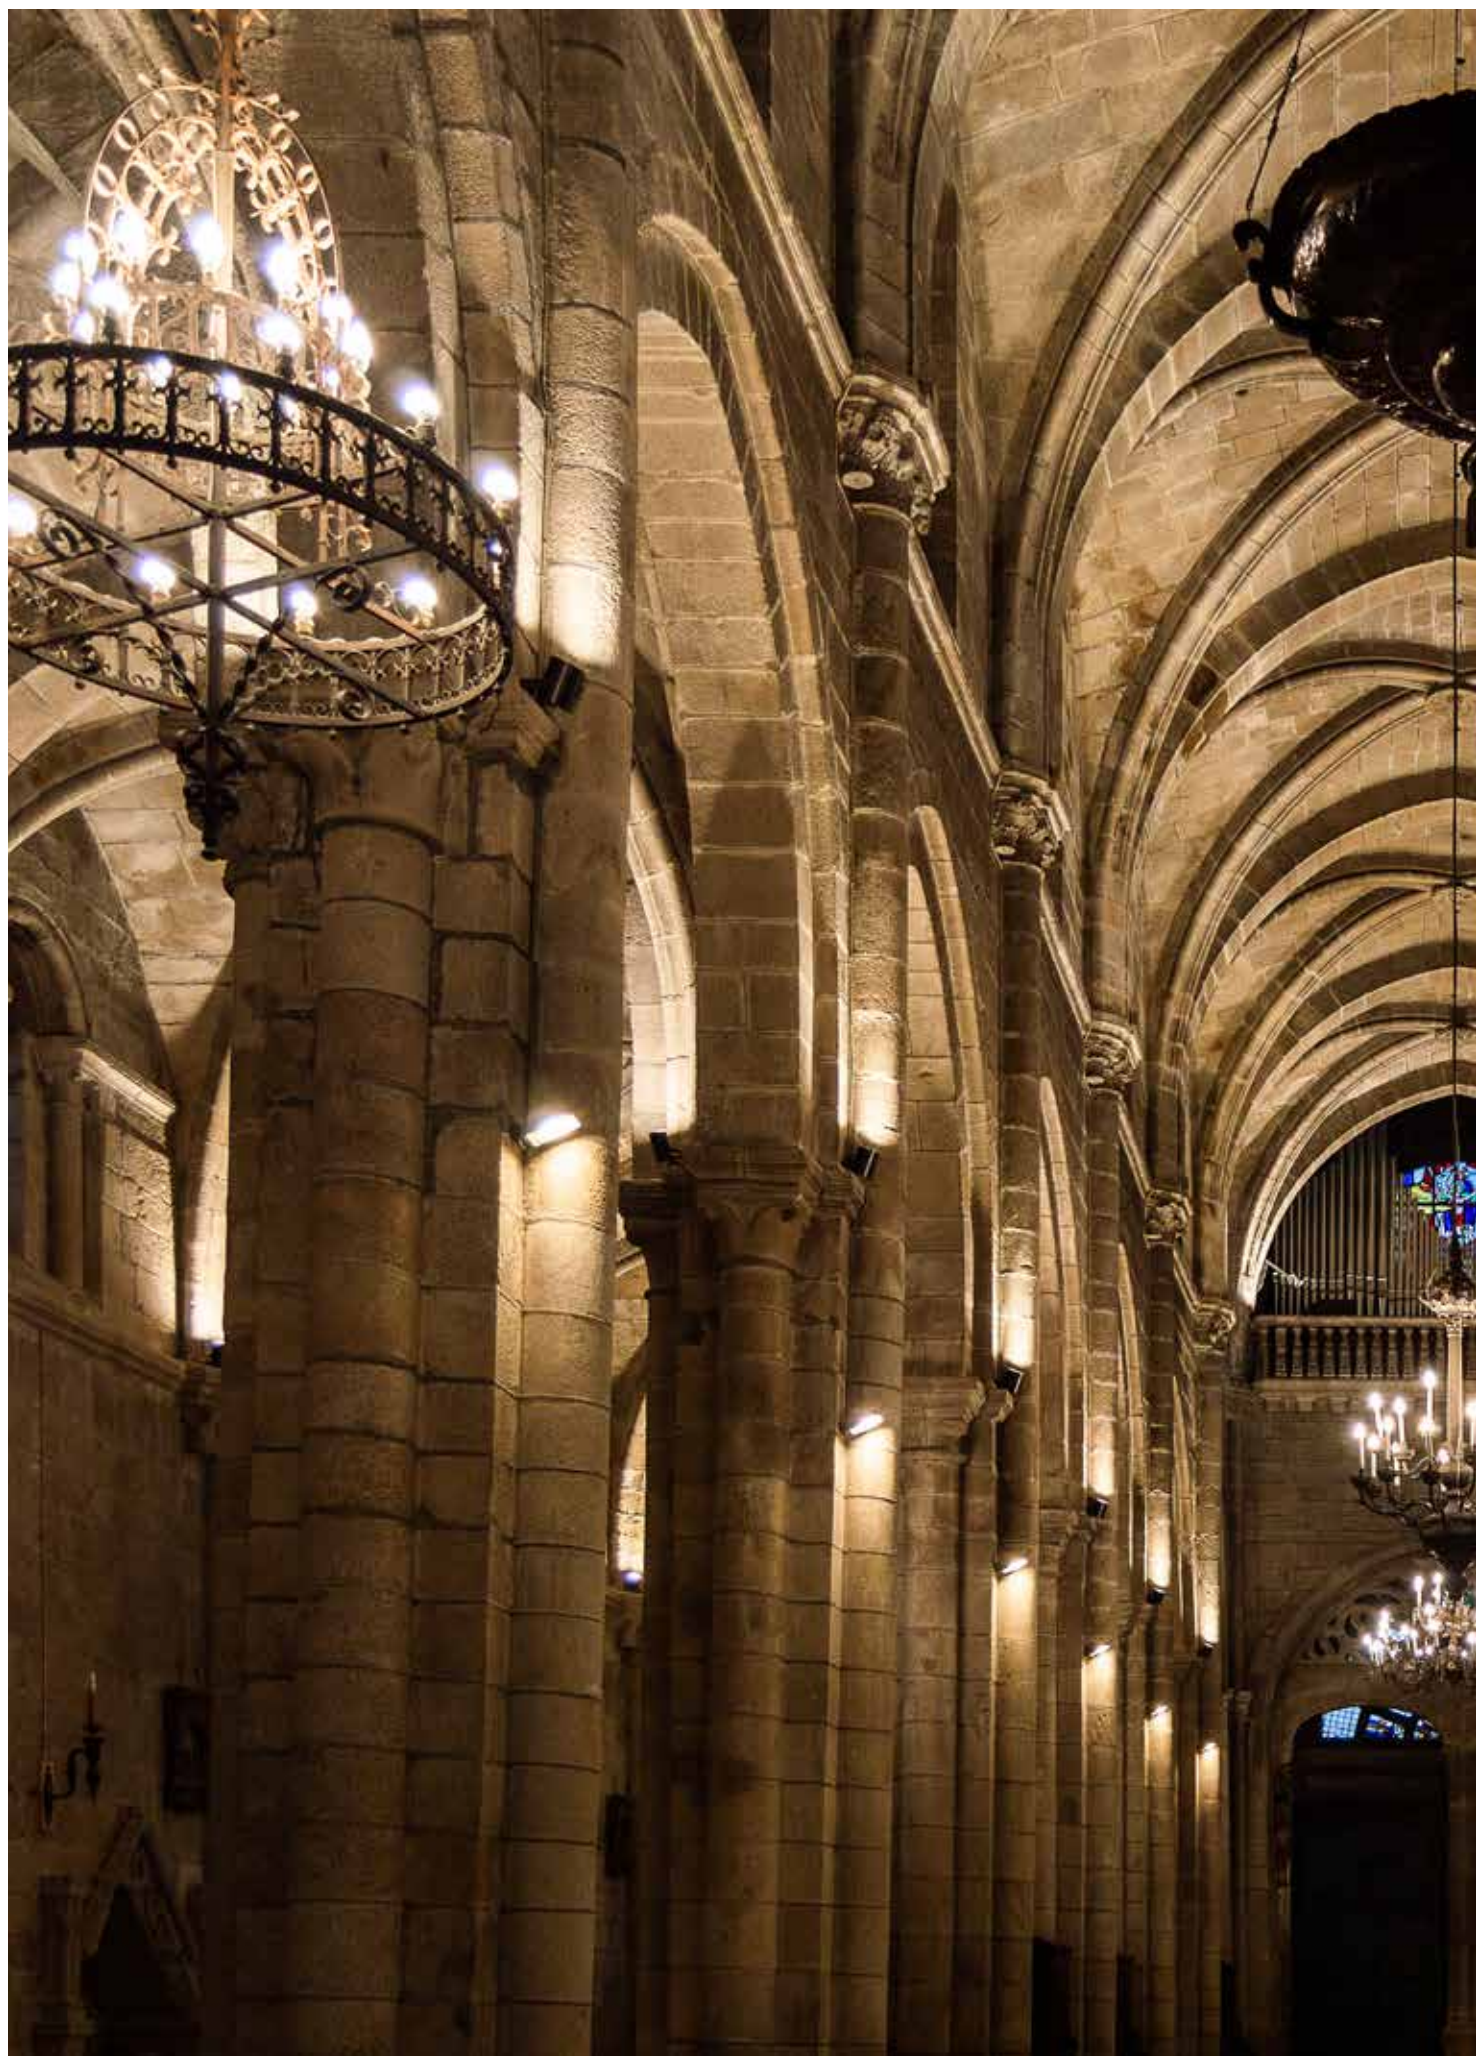



Vector by Luxiona Designers



Features

Monoblock spotlight with cylindrical extruded aluminium body. The entire body of the luminaire acts as a heatsink, allowing the integration of drivers inside the body. Orientation system based on a single axis, which allows the rotation of 355° and tilting 90°. Optical system made up of individual LEDs with collimating PMMA lenses, and asymmetric or elliptical technical diffusers. The elliptical version allows the diffuser to rotate 90°, which allows the projected ellipse to be oriented.

CE		IP 20	 850°	 90°	 355°
LED	CRI ≥90	SDCM 3	60000h L80B10		


DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes



Ask us for custom colours.

Body: Aluminium

Installation: Three-phase track



13
W

Lm	K		Code
858	3000	7°	11.1536.0031
960	4000	7°	11.1536.0041

Vector



15
W

Lm	K		Code
1021	3000	50° + 20°	11.1536.0032
1130	4000	50° + 20°	11.1536.0042

Elliptical beam



Tracklights



28
W

Lm	K		Code
1534	3000	Asym. 15°	11.1536.0033
1640	4000	Asym. 15°	11.1536.0043
2504	3000	20°	11.1536.0131 
2704	4000	20°	11.1536.0141 
2222	3000	36°	11.1536.0331 
2401	4000	36°	11.1536.0341 

Indoor



Accessories



2427
Surface base for spotlights with
tree-phase adapter.

LUXIONA troll







From the belief that many times less is more, Magnetick is designed as a minimalist lighting system to be integrated at indoor spaces where functionality and comfort are key elements. Produced with aluminium profiles (2mm wide), it adapts to spaces at hotels, stores, offices and even residential areas with an ease which is unusual for any other lighting element, creating either ambient or accent lighting, or both. This family's adaptability is not only defined by the lighting and visual effects it creates, but also by the physical dimension it is grabbed at, which allows built-in, surface/suspension (rectangular), suspended (circular) and suspended (Up&Down) profiles.

Magnetick

Tracklights



Indoor

LUXIONA troll

Magnetick is a minimalist lighting system to be integrated at indoor spaces. There are 4 different profile versions:

- Built-in
- Surface/suspension (rectangular)
- Suspended (circular)
- Suspended (Up&Down)

They are all produced with black extruded aluminium cross-sections of 3m max., stocked with 48V electric circuits and limited to a current of 5.2A, 250W max. (surface and built-in versions) and 7.3A, 350W max. (suspended versions)


Single power source lenght of 20m max. IP20.

To be installed even on flammable surfaces.

Magnetick family also comprises ambient and accent lighting units, in both fixed and adjustable versions:

- Spot M S Spotlights with cylindrical format.
- Spot Box Spotlights with linear format.
- Box luminaires with linear format from diffuser or microlens.
- Globe luminaires with dim ambient light.

The system allows the lighting of spaces at hotels, stores, offices and even residential areas, which provides a high degree of architectural integration as the space lighting elements require is less.

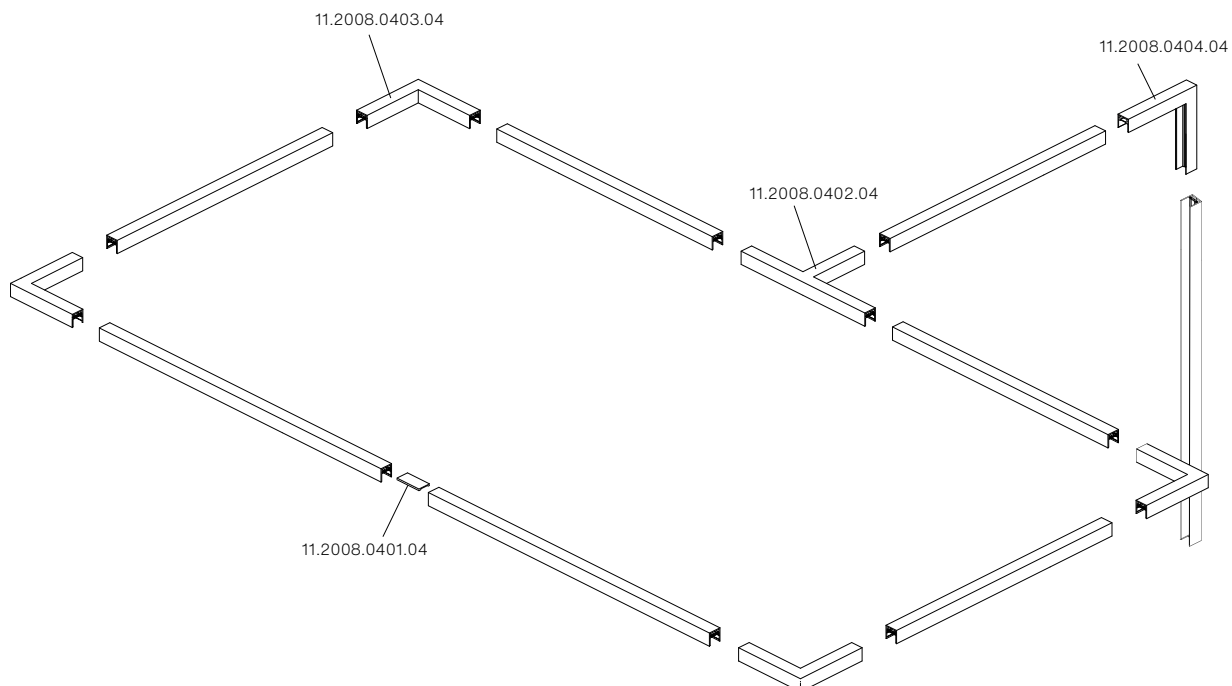



Magnetick

Tracklights



Indoor

LUXIONA troll



Features

- Track made of extruded aluminium of 3mm max., black finish.
- Spot M and S made of injected aluminium, PMMA lenses.
- Spot Box made of synthetic material body, PMMA lenses.
- Box made of aluminium with opal polycarbonate diffuser or.
- PMMA lenses Global has an aluminium body with spherical opal glass diffuser.

CE

IP
20

LED

SDCM
3

60000h
L80B10

48
VDC


Standard finishes
Add needed finish to complete the product reference.

Installation: Ceiling / Suspended / Track Low Voltage

.04


Magnetick Track

Body: Aluminium




Installation: Surface / Suspended

L		Code
2000 mm	Tramo inicial con acometida	11.2008.0422
2000 mm	Extensión línea continua	11.2008.0423




Installation: Recessed

L	Code
2000 mm	11.2008.0722




Installation: Recessed trimless

L	Code
2000 mm	11.2008.0822



Installation: Pendant

L	Code
2000 mm	11.2008.0522



Installation: Pendant Up&Down

L	Code
2000 mm	11.2008.0622

Magnetick

Tracklights

Indoor


LUXIONA troll

Accessories




11.2008.0001
Magnetick suspension 2m.


11.2008.0002
Magnetick suspension with
connection box. 2m.




11.2008.0401
Surface connection module 180°



11.2008.0402
Surface connection module "T"
90°



11.2008.0403
Surface connection module "L"
90°



11.2008.0404
Surface connection module
"L" 90° N

11.2008.0400
Surface supply module.
100W 48VDC 330 x 26 x 25mm

Magnetick Spot S


CRI

≥90

UGR


<19

Body: Aluminium



3
W

Lm	K		Code
227	3000	20°	11.2008.3311
185	3000	40°	11.2008.3321
200	4000	20°	11.2008.3411
200	4000	40°	11.2008.3421



5
W

Lm	K		Code
301	3000	20°	11.2008.4311
320	3000	40°	11.2008.4321
338	4000	20°	11.2008.4411
338	4000	40°	11.2008.4421

Magnetick Spot M



90°



355°


CRI

≥90

UGR

<19

Body: Aluminium



12
W

Lm	K		Code
572	3000	20°	11.2008.5311
580	3000	40°	11.2008.5321
616	4000	20°	11.2008.5411
616	4000	40°	11.2008.5421

Magnetick

Tracklights

Magnetick Spot Box



90°


CRI

≥80

UGR

<19

Body: Plastic



6
W

Lm	K		Code
437	3000	20°	11.2008.6311
544	3000	30°	11.2008.6321
437	3000	60°	11.2008.6331
460	4000	20°	11.2008.6411
460	4000	30°	11.2008.6421
460	4000	60°	11.2008.6431


Indoor

LUXIONA troll

Magnetick Box

CRI
≥80


Body: Aluminium



7
W


UGR
<19

Lm	K		Code
549	3000	25°	11.2008.2311
544	3000	30°	11.2008.2321
549	3000	60°	11.2008.2331
610	4000	25°	11.2008.2411
577	4000	30°	11.2008.2421
610	4000	60°	11.2008.2431




15
W

Lm	K		Code
958	3000	110°	11.2008.1301
1014	4000	110°	11.2008.1401



22
W

Lm	K		Code
1437	3000		110° 11.2008.1302
1522	4000		110° 11.2008.1402
1364	3000	Black diffuser	110° 11.2008.1303
1446	4000	Black diffuser	110° 11.2008.1403




7
W

Lm	K		Code
545	3000	18° Asym.	11.2008.6351
608	4000	18° Asym.	11.2008.6451

Magnetick Glove

CRI
≥90

Body: Aluminium
Diffuser: Glass



2
W

Lm	K	Code
230	3000	11.2008.7301
250	4000	11.2008.7401

Accessories

.00

11.1801.7014
Power supply ON/OFF, 48V
220-240V 75W Class II ind. use
180x52x30mm IP20

11.1801.7015
Power supply ON/OFF, 48V
220-240V 120W Class II ind. use
300x40x30mm IP20



Magnetick

Tracklights

Indoor

LUXIONA troll

T-Tris by Luxiona Designers



At retail food stores, adjustable, versatile and energy-efficient lighting is essential so that products on display draw clients' attention. This is not possible without taking into account factors, such as the proper lighting of products and the different areas at spaces together with a fast and easy installation of the system.

T-Tris installation is based on the standard three phase track rail and allows the lighting of specific areas of spaces while making products on display stand out thanks to the versatility and the range of elements the system may comprise. T-Tris sytem includes important advantages in a single concept: flexibility, thanks to the endless amount of possible light settings; versatility, as it provides elements from a wide aesthetic range that allow a precise technical lighting; excellence, assuring a lighting quality that adjusts to the necessities; and efficiency, from the use of LED luminaires in order to lessen both consumption and installation maintenance.

T-Tris

Tracklights



Indoor

LUXIONA troll

T-Tris Line
T-Tris Box
T-Tris L/T



Features

Profile made of extruded aluminium. Translucent polycarbonate diffuser.

--	--	--

Consult for dimming options.


Standard finishes
Add needed finish to complete the product reference.

--	--	--

Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: PLX (PMMA OPAL)

Installation: Ceiling / Three-phase track



Lm	K		Code
1258	3000	75°	11.1671.3101
1324	4000	75°	11.1671.3102




Lm	K		Code
1258	3000	75°	11.1671.3105
1324	4000	75°	11.1671.3106



Lm	K		Code
1530	3000	75°	11.1671.3103
1611	4000	75°	11.1671.3104



Lm	K		Code
1530	3000	75°	11.1671.3107
1611	4000	75°	11.1671.3108



Lm	K		Code
1677	3000	75°	11.1671.3201
1765	4000	75°	11.1671.3202




Lm	K		Code
1677	3000	75°	11.1671.3205
1765	4000	75°	11.1671.3206



Lm	K		Code
2041	3000	75°	11.1671.3203
2148	4000	75°	11.1671.3204



Lm	K		Code
2041	3000	75°	11.1671.3207
2148	4000	75°	11.1671.3208



Lm	K		Code
2095	3000	75°	11.1671.3301
2206	4000	75°	11.1671.3302




Lm	K		Code
2095	3000	75°	11.1671.3305
2206	4000	75°	11.1671.3306



Lm	K		Code
2551	3000	75°	11.1671.3303
2685	4000	75°	11.1671.3304



Lm	K		Code
2551	3000	75°	11.1671.3307
2685	4000	75°	11.1671.3308



Lm	K		Code
2515	3000	75°	11.1671.3401
2648	4000	75°	11.1671.3402



Lm	K		Code
2515	3000	75°	11.1671.3405
2648	4000	75°	11.1671.3406



Lm	K		Code
3061	3000	75°	11.1671.3403
3222	4000	75°	11.1671.3404



Lm	K		Code
3061	3000	75°	11.1671.3407
3222	4000	75°	11.1671.3408



Characteristics

Body made of lacquered sheet steel with polymethylmethacrylate lenses.

CE		IP 20	 850°
LED	CRI ≥80	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.



Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Steel sheet

Installation: Three-phase track

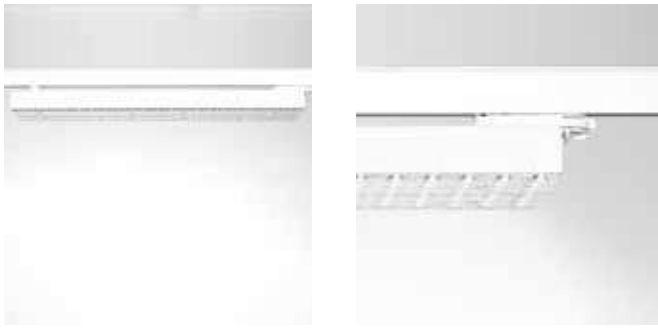


21
W

Lm	K	▲	Code
2914	4000	30°	11.1670.1411
2865	4000	60°	11.1670.1421
2857	4000	90°	11.1670.1431
2846	4000	110°	11.1670.1441
2842	4000	Double Asym	11.1670.1451
2864	4000	Asym R	11.1670.1461
2864	4000	Asym L	11.1670.1471
2430	4000	Diffuse	11.1670.1481




41
W

Lm	K	▲	Code
5828	4000	30°	11.1670.4411
5730	4000	60°	11.1670.4421
5714	4000	90°	11.1670.4431
5692	4000	110°	11.1670.4441
5683	4000	Double Asym	11.1670.4451
5728	4000	Asym R	11.1670.4461
5728	4000	Asym L	11.1670.4471
4860	4000	Diffuse	11.1670.4481




31
W

Lm	K	▲	Code
4371	4000	30°	11.1670.2411
4289	4000	60°	11.1670.2421
4286	4000	90°	11.1670.2431
4269	4000	110°	11.1670.2441
4263	4000	Double Asym	11.1670.2451
4269	4000	Asym R	11.1670.2461
4269	4000	Asym L	11.1670.2471
3645	4000	Diffuse	11.1670.2481

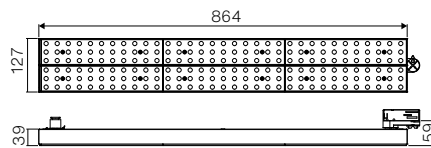


62
W

Lm	K	▲	Code
8742	4000	30°	11.1670.5411
8596	4000	60°	11.1670.5421
8571	4000	90°	11.1670.5431
8538	4000	110°	11.1670.5441
8525	4000	Double Asym	11.1670.5451
8592	4000	Asym R	11.1670.5461
8592	4000	Asym L	11.1670.5471
7291	4000	Diffuse	11.1670.5481

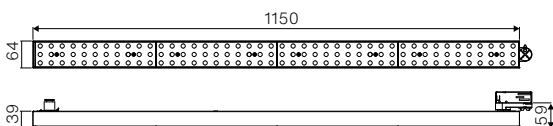

41
W

Lm	K	▲	Code
5828	4000	30°	11.1670.3411
5730	4000	60°	11.1670.3421
5714	4000	90°	11.1670.3431
5692	4000	110°	11.1670.3441
5683	4000	Double Asym	11.1670.3451
5728	4000	Asym R	11.1670.3461
5728	4000	Asym L	11.1670.3471
4860	4000	Diffuse	11.1670.3481

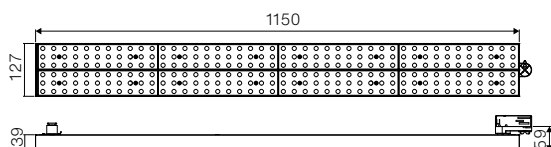

82
W

Lm	K	▲	Code
11656	4000	30°	11.1670.6411
11656	4000	60°	11.1670.6421
11429	4000	90°	11.1670.6431
11384	4000	110°	11.1670.6441
11367	4000	Double Asym	11.1670.6451
11456	4000	Asym R	11.1670.6461
11456	4000	Asym L	11.1670.6471
9721	4000	Diffuse	11.1670.6481

T-Tris Line
T-Tris Box
T-Tris L/T



Features

Body made of steel sheet, powder coated. Orientation system that allows rotation of 355°; the driver is integrated into the spotlight. Highly efficient LED and high quality aluminium reflector with asymmetrical projection.

CE

IP
20

850°

355°

LED

CRI
≥90

SDCM
3

60000h
L80B10

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.04


.21

.63

Other finishes
Ask us for custom colours.

Body: Aluminium


Installation: Three-phase track



Lm	K		Code
1930	3000	Asym	11.1833.1311
2100	4000	Asym	11.1833.1411




Lm	K		Code
3190	3000	Asym	11.1833.2311
3497	4000	Asym	11.1833.2411



Lm	K		Code
2 x 1930	3000	Double Asym	11.1833.3311
2 x 2100	4000	Double Asym	11.1833.3411



Lm	K		Code
2 x 3190	3000	Double Asym	11.1833.4311
2 x 3497	4000	Double Asym	11.1833.4411

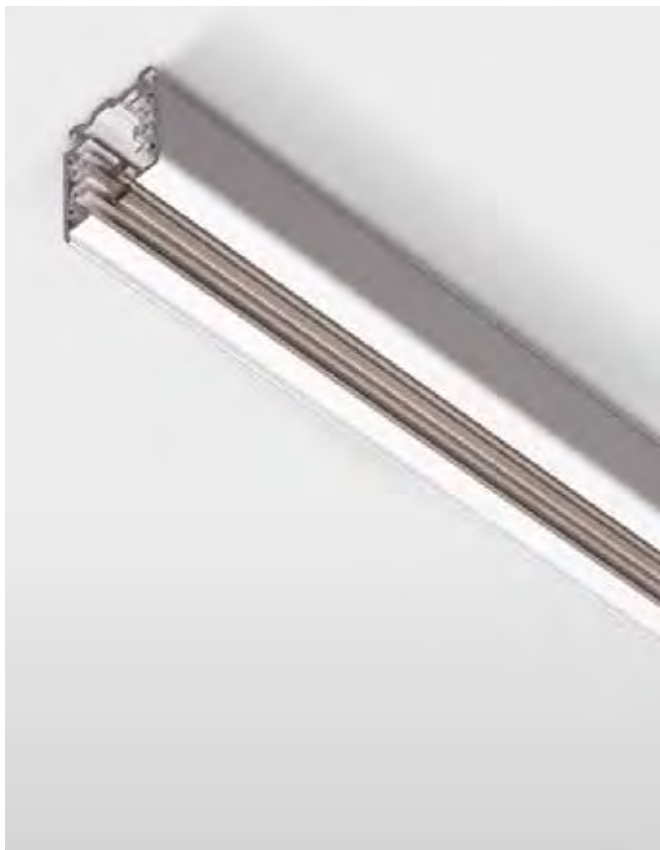

Features

The electrified tracks TROLL created were the origin and the strongest push for the brand. Today, these tracks are still the most flexible solution to increase, reduce or shift light spots of facilities without the necessity of turning to a professional. The offer includes 3-ignition systems to place, suspend or build-in with a full offer of accessories designed to ease their mounting and, for sure, to provide an adjustable use.



Standard finishes



Add needed finish to complete the product reference.



Body: Aluminium, copper & plastic


Installation: Ceiling / Suspended / Three-phase track

Track ON-OFF



Three-phase surface track
L1+L2+LB+N+TT 16A/400V

L	Code
1000 mm	2420/100
2000 mm	2420/200
3000 mm	2420/300
4000 mm	2420/400



Three-phase recessed track
L1+L2+LB+N+TT 16A/400V

L	Code
1000 mm	2421/100
2000 mm	2421/200
3000 mm	2421/300
4000 mm	2421/400

Connection systems / Adaptors




2400
End cover



2401/01
Left



2401/02
Right



2402
Flexible connector



2403/10
Continuity connector
with connection




2403
Continuity connector




2408/02
RIGHT "L" connector, option
of connection




2408/01
LEFT "L" connector, option
of connection




2407/02
RIGHT "T" connector, option of
connection



2407/01
LEFT "T" connector, option of
connection




2407/04
LEFT "T" connector, option
of connection.
TT down



2407/03
RIGHT "T" connector, option
of connection.
TT up

Tracks


Track ON-OFF Connection systems / Adaptors



2409
“+” connector, option of connection



2417
Adaptor with cable
L=3m



2427
Surface base for spotlights with tree-phase adapter

Suspension systems



2434
Ceiling rose fastening



2418
Support hook



2442
Linear accessories cover for recessed track



2413
Fastening directly to the ceiling



2431
Suspension clamp



L=182 mm

2432
Reinforced suspension clamp



L=2000mm

2435
M6 Threaded stem L=2.000 mm



2438
Tuerca M6



2439
M6 Nut




2440
Cable suspension L=1.500 mm




2441
Bending tool

Track DALI



Three-phase surface track
L1+L2+LB+N+TT 16A/400V

L	Code
1000 mm	2420D/100
2000 mm	2420D/200
3000 mm	2420D/300
4000 mm	2420D/400



Three-phase recessed track
L1+L2+LB+N+TT 16A/400V

L	Code
1000 mm	2421D/100
2000 mm	2421D/200
3000 mm	2421D/300
4000 mm	2421D/400

Connection systems / Adaptors DALI




2400
End cover



2401D/01
Left DALI



2401D/02
Right DALI



2402D
Flexible connector DALI



2403D/10
Continuity connector
with connection DALI




2403D
Continuity connector DALI




2408D/02
RIGHT "L" connector, option
of connection DALI




2408D/01
LEFT "L" connector, option
of connection DALI




2407D/02
RIGHT "T" connector, option of
connection DALI




2407D/01
LEFT "T" connector, option of
connection DALI



2407D/04
LEFT "T"
connector, option of con-
nection DALI.
TT down



2407D/03
RIGHT "T" connector, option
of connection DALI.
TT up




2409D
"+" connector, option of con-
nection DALI




2417D
Adaptor with cable
L=3m DALI

Tracks

The recommended distance between fastenings is 1m. (see load diagram). The tracks are pre-drilled at the back, for fastening directly to the ceiling. Nevertheless, there is a wide range of optional fastenings.





Cutting electric tracks: 242 tracks are supplied in standard lengths which can be easily cut to the required length with a metal saw or circular saw. After cutting, the conduits must be bent to a 90° angle using piece 2441. The conduits must be measured and adjusted with the plastic calibrator at one end of piece 2441. The conduit elbows are at the correct distance from the end of the track when the plastic calibrator does not jut out, but is flush with the track end.

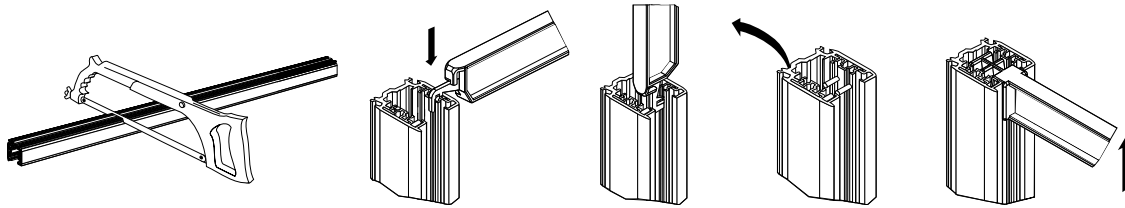

Fastening accessories


Tracks 2420 and 2421 have a rib at the bottom which determines the position of the adaptor. In order to maintain continuity, some of the coupling elements between tracks, such as "L" and "T", and connectors, must be selected bearing this in mind. The charts below, along with the attached table of example structures, provide help with selection.

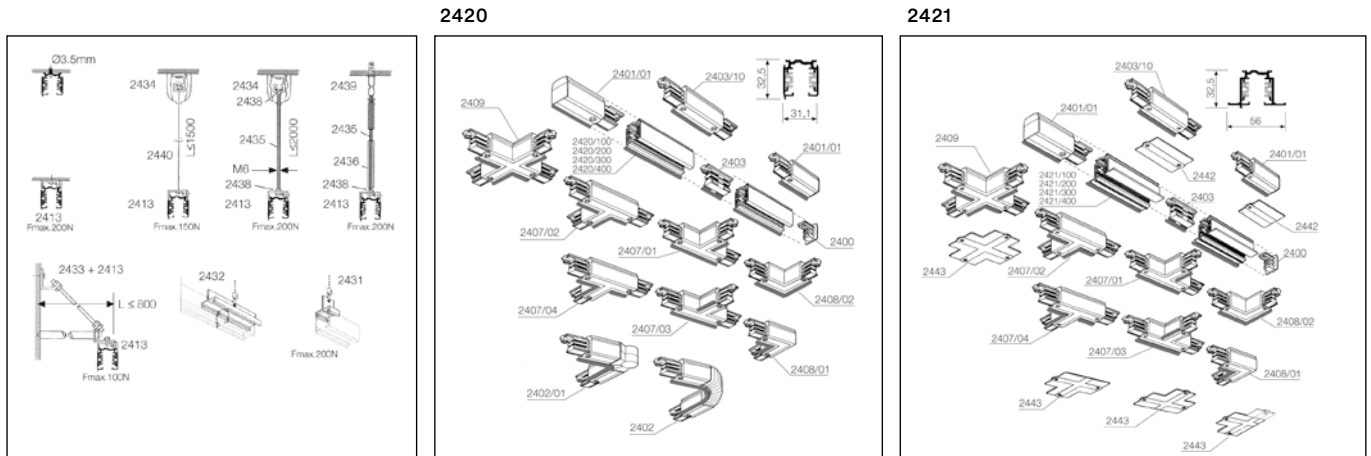

Accessories Track ON-OFF



2411 
Schuko adapter for three-phase
rail

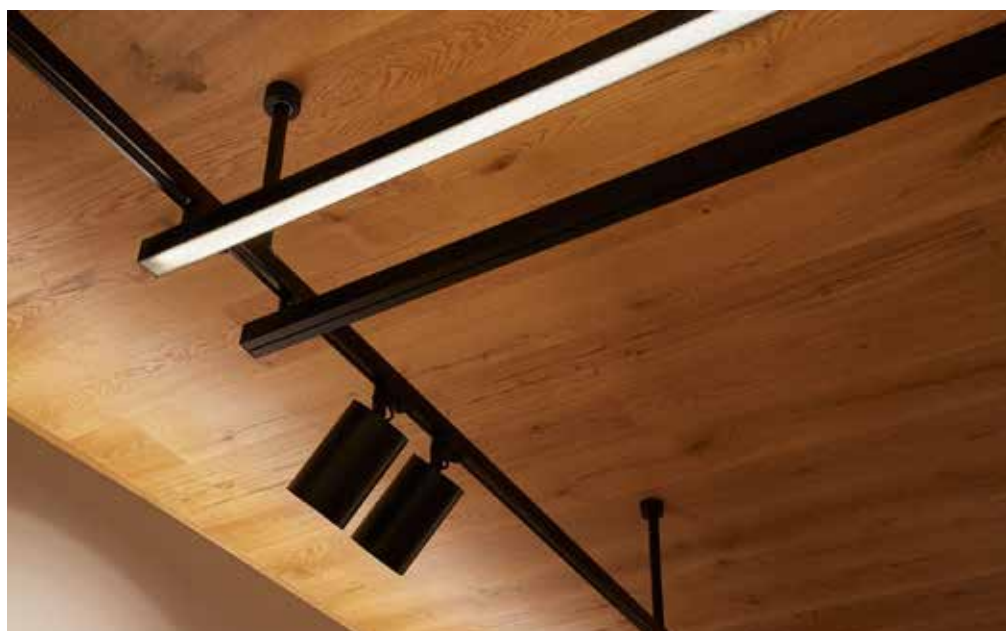

Tracks

Tracklights



Indoor

LUXIONA troll

138
Contract

152
Pipe

172
Zas

178
Focus

184
Angle

188
Ecoled

144
Versatile

154
Beryl

174
Microdownlights

180
Optics

186
Downled



Features

Downlight with body made of aluminium. It include a turning system that allows rotation of 355° and tilting of 30°. High quality primary reflectors made of high vacuum aluminized synthetic material. All models include latest LED generation and built-in and remote electronic Drive.

Suitable for the commercial sector, homes or corporate headquarters that are looking for features that set them apart from the rest and provide them with energy savings, reduced size of the luminaire, durability and a perfect beam of light.

CE

IP
20

850°

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Consult for Trimless options.

Standard finishes
Add needed finish to complete the product reference.

.04

.63

Body: Aluminium

Installation: Recessed / Ceiling

Contract Pro R


60000h
L80B10

355°

30°

.04

.63




8
W

Lm	K		Code
440	3000	15°	11.1930.1311
427	3000	24°	11.1930.1321
448	3000	36°	11.1930.1331
475	4000	15°	11.1930.1411
462	4000	24°	11.1930.1421
485	4000	36°	11.1930.1431

14
W

Lm	K		Code
685	3000	15°	11.1930.2311
665	3000	24°	11.1930.2321
698	3000	36°	11.1930.2331
739	4000	15°	11.1930.2411
719	4000	24°	11.1930.2421
754	4000	36°	11.1930.2431




21
W

Lm	K		Code
1365	3000	15°	11.1930.3311
1365	3000	24°	11.1930.3321
1376	3000	36°	11.1930.3331
1474	4000	15°	11.1930.3411
1474	4000	24°	11.1930.3421
1486	4000	36°	11.1930.3431

28
W

Lm	K		Code
1820	3000	15°	11.1930.4311
1819	3000	24°	11.1930.4321
1180	3000	36°	11.1930.4331
1966	4000	15°	11.1930.4411
1965	4000	24°	11.1930.4421
1274	4000	36°	11.1930.4431



34
W

Lm	K		Code
2499	3000	15°	11.1930.5311
2469	3000	24°	11.1930.5321
1935	3000	36°	11.1930.5331
2698	4000	15°	11.1930.5411
2666	4000	24°	11.1930.5421
2090	4000	36°	11.1930.5431

Contract

Recessed Downlights

Indoor

LUXIONA troll

Contract Pro SQ

60000h

L80B10

30°

.04

.63



75 x 75

8 W				
Lm	K		Code	
440	3000	15°	11.1931.1311	
427	3000	24°	11.1931.1321	
448	3000	36°	11.1931.1331	
475	4000	15°	11.1931.1411	
462	4000	24°	11.1931.1421	
485	4000	36°	11.1931.1431	

14 W				
Lm	K		Code	
685	3000	15°	11.1931.2311	
665	3000	24°	11.1931.2321	
698	3000	36°	11.1931.2331	
739	4000	15°	11.1931.2411	
719	4000	24°	11.1931.2421	
754	4000	36°	11.1931.2431	

105 x 105

21 W				
Lm	K		Code	
1365	3000	15°	11.1931.3311	
1365	3000	24°	11.1931.3321	
1376	3000	36°	11.1931.3331	
1474	4000	15°	11.1931.3411	
1474	4000	24°	11.1931.3421	
1486	4000	36°	11.1931.3431	

28 W				
Lm	K		Code	
1820	3000	15°	11.1931.4311	
1819	3000	24°	11.1931.4321	
1180	3000	36°	11.1931.4331	
1966	4000	15°	11.1931.4411	
1965	4000	24°	11.1931.4421	
1274	4000	36°	11.1931.4431	

125 x 125

34 W				
Lm	K		Code	
2499	3000	15°	11.1931.5311	
2469	3000	24°	11.1931.5321	
1935	3000	36°	11.1931.5331	
2698	4000	15°	11.1931.5411	
2666	4000	24°	11.1931.5421	
2090	4000	36°	11.1931.5431	



Banco Estado, Santiago de Chile. Chile.

Contract

Recessed Downlights

Indoor


LUXIONA troll

Contract Pro WW R

50000h
L70B10

.04


.63



9
W

Lm	K		Code
471	3000	Assym 15°	11.1937.1311
471	3000	Assym 24°	11.1937.1321
471	3000	Assym 36°	11.1937.1331
509	4000	Assym 15°	11.1937.1411
509	4000	Assym 24°	11.1937.1421
509	4000	Assym 36°	11.1937.1431

Ø55






21
W




Lm	K		Code
1272	3000	Assym 15°	11.1937.3311
1272	3000	Assym 24°	11.1937.3321
1272	3000	Assym 36°	11.1937.3331
1373	4000	Assym 15°	11.1937.3411
1373	4000	Assym 24°	11.1937.3421
1373	4000	Assym 36°	11.1937.3431

Ø95

Contract Pro WW SQ



Lm	K		Code
471	3000	Assym 15°	11.1937.4311
471	3000	Assym 24°	11.1937.4321
471	3000	Assym 36°	11.1937.4331
509	4000	Assym 15°	11.1937.4411
509	4000	Assym 24°	11.1937.4421
509	4000	Assym 36°	11.1937.4431



Lm	K		Code
1272	3000	Assym 15°	11.1937.6311
1272	3000	Assym 24°	11.1937.6321
1272	3000	Assym 36°	11.1937.6331
1373	4000	Assym 15°	11.1937.6411
1373	4000	Assym 24°	11.1937.6421
1373	4000	Assym 36°	11.1937.6431

Contract

Recessed Downlights

Indoor

LUXIONA troll




Versatile is a family of small size adjustable downlights. It comes in different lighting sources and combinable structures to get highly customized luminaires which adjust to each environment according to their necessities. The product is excellent for hospitality, domestic or office sectors. It is a very versatile product that will allow both to create minimalist general lighting systems and to complement technical lighting systems by creating light effects.

Versatile

Recessed Downlights

Indoor

LUXIONA troll

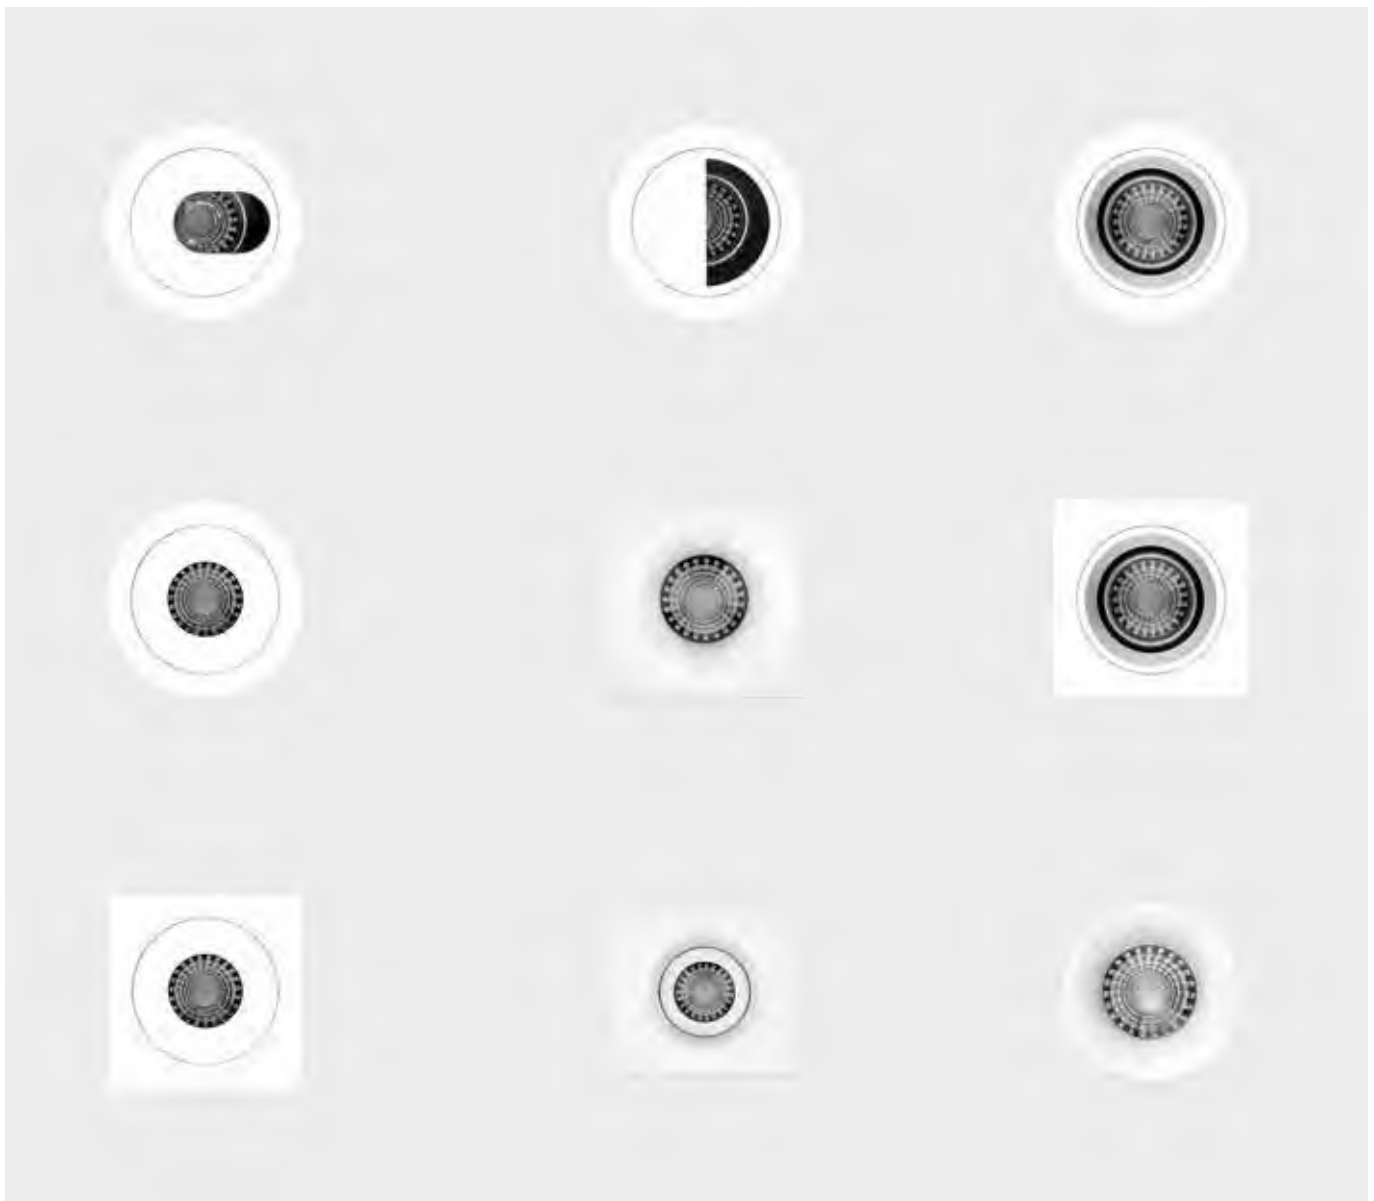

Light engine

The Versatile System allows both the use of GU10 lamps (max. 15W) and CoB LED motors (8W, 12 or 17W) made of aluminum.

A- Led CoB
B- GU10

The LED motors mount an interchangeable 36 ° lens. 15 °, 24 ° and 60 ° lenses available as accessories.



Frames

The system is complemented by different frames that allow the personalization of the space:

1. Basic series, in square and circular format with customizable secondary reflector, made of plastic material.
2. Soft series, in square or circular format, both fixed and adjustable. Made of aluminum and steel. This series has a trimless circular version.
3. Pinhole series, made of aluminum, the installation frame is complemented with different accessories to generate different light effects.



Accessories

Pinhole series, is complemented with different accessories to generate different light effects.

Standard finishes

Add needed finish to complete the product reference.

Installation: Ceiling / Recessed

.63

Other finishes

Ask us for custom colours.

Light engine

CE

IP
20

850°

LED

CRI
≥90

SDCM
3

50000h
L70B10

DRIVER
INCL.

220
240 V

50
60 Hz

Check out with us for regulation options.

LED personalisation
Check all types of LEDs on guide´s page 23

Body: Aluminium heatsink



9 W		↕ 61,2mm					
Lm	K		Code				
834	3000	36°	11.1936.1331				
845	4000	36°	11.1936.1431				

13 W		↕ 76,51mm					
Lm	K		Code				
1157	3000	36°	11.1936.2331				
1250	4000	36°	11.1936.2431				

18 W		↕ 85,5mm					
Lm	K		Code				
1591	3000	36°	11.1936.3331				
1719	4000	36°	11.1936.3431				

Accessories



11.1936.0010
Lens Versatile 15°

11.1936.0020
Lens Versatile 24°

11.1936.0060
Lens Versatile 60°

Incandescent or retrofit equivalent



15W max.			
Lamp Holder	Code		
GU 10	11.1936.0000		

Versatile

Recessed Downlights

Indoor


LUXIONA troll

Versatile

Frames


Versatile Basic

Body: Plastic body



Code
11.1936.1001

Light engine	Total High (mm)
8W	88
12W	102
17W	113
GU10 socket	112




Code
11.1936.1002

Light engine	Total High (mm)
8W	88
12W	102
17W	113
GU10 socket	112


Versatile Soft

Body: Aluminium body




Code
11.1936.3001

Light engine	Total High (mm)
8W	79
12W	94
17W	104
GU10 socket	103




Code
11.1936.3004

Light engine	Total High (mm)
8W	82
12W	97
17W	105
GU10 socket	104




Code
11.1936.3003

Light engine	Total High (mm)
8W	76
12W	91
17W	102
GU10 socket	100



Code
11.1936.3005

Light engine	Total High (mm)
8W	80
12W	96
17W	107
GU10 socket	105




Code
11.1936.3002

Light engine	Total High (mm)
8W	78
12W	95
17W	104
GU10 socket	102

Frames


Versatile Pinhole

Body: Aluminium + Iron body



Code
11.1936.2001

Light engine	Total High (mm)
8W	100
12W	116
17W	128
GU10 socket	127



Code
11.1936.2003

Light engine	Total High (mm)
8W	100
12W	116
17W	128
GU10 socket	127

Accessories



11.1936.2101
Versatile round accessory center pin

11.1936.2201
Versatile round accessory ellipse

11.1936.2301
Versatile round accessory half cercle



Versatile

Recessed Downlights



Indoor

LUXIONA **trol**



Features

Downlight of aluminium injected with lenses and reflector, synthetic material. Newest LED generation and remote electronic equipment included.



Consult for dimming options.

Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.


Body: Extruded aluminium.

Installation: Ceiling / Recessed / Surface

Also available on other typology_page 240

LED personalisation


Check all types of LEDs on guide's page 23



Ø50

9
W


Lm	K		Code
719	3000	12°	11.1803.4311
727	3000	24°	11.1803.4321
725	3000	36°	11.1803.4331
790	4000	12°	11.1803.4411
799	4000	24°	11.1803.4421
797	4000	36°	11.1803.4431



Ø85

27
W

Lm	K		Code
2709	3000	12°	11.1803.5311
2709	3000	24°	11.1803.5321
2730	3000	36°	11.1803.5331
2825	4000	12°	11.1803.5411
2825	4000	24°	11.1803.5421
2853	4000	36°	11.1803.5431



Ø85

36
W

Lm	K		Code
3185	3000	12°	11.1803.6311
3358	3000	24°	11.1803.6321
3224	3000	36°	11.1803.6331
3381	4000	12°	11.1803.6411
3464	4000	24°	11.1803.6421
3335	4000	36°	11.1803.6431

Beryl



Lighting must try to combine technique and shape to become a part of architecture, providing good visual comfort and a minimum alteration of a space's aesthetic. The family of luminaires Beryl adopts simple shapes to fulfil all this, with high efficiency and minimum usage.

Beryl

Recessed Downlights

Indoor

LUXIONA troll





Features

Luminaire with aluminium body. Excellent heat dissipation and large luminous flux for its size. It is ideal for hotels, stores and offices.

CE

IK
04



DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium
Diffuser:
(1) = Transparent glass
(2) = Transparent PMMA
(3) = PLX (PMMA opal)
(4) = Micro-PRM (micro-prismatic diffuser PMMA)

Installation: Ceiling / Recessed

Also available on other typology_page 242

LED personalisation
Check all types of LEDs on guide´s page 23

IP20 IP44	CRI ≥80	SDCM 2	83000h L90B10
--------------	------------	-----------	------------------






8 W	ON/ OFF
--------	------------

Lm	K	Diffuser	▲	Code
702	4000	(2)	40°	19.3051.1101
762	4000	(4)	90°	19.3051.1301
641	4000	(3)	85°	19.3051.1201

14 W	ON/ OFF
---------	------------

Lm	K	Diffuser	▲	Code
1416	4000	(4)	90°	19.3051.2301
1192	4000	(3)	85°	19.3051.2201
1304	4000	(2)	85°	19.3051.2101



20 W	ON/ OFF
---------	------------

Lm	K	Diffuser	▲	Code
2385	4000	(1)	75°	19.3051.3101
2105	4000	(4)	110°	19.3051.3301
2133	4000	(3)	100°	19.3051.3201

27 W	ON/ OFF
---------	------------

Lm	K	Diffuser	▲	Code
2930	4000	(4)	110°	19.3051.4301
2969	4000	(3)	100°	19.3051.4201
3320	4000	(1)	75°	19.3051.4101

IP20 IP44	CRI ≥80	100000h L80B10
--------------	------------	-------------------





TW (Tunable white)

16 W	▲
---------	---

Lm	K	Diff.	▲	Code
1615	2450-7000	(1)	75°	19.3051.0101
1425	2450-7000	(4)	110°	19.3051.0301
1444	2450-7000	(3)	100°	19.3051.0201



IP20 IP44	CRI ≥80	SDCM 2	76000h L90B10
--------------	------------	-----------	------------------



27 W	ON/ OFF
---------	------------

Lm	K	Diffuser		Code
2969	4000	(3)	100°	19.3051.8201
3320	4000	(1)	75°	19.3051.8101

IP20 IP44	CRI ≥80	SDCM 2	83000h L90B10
--------------	------------	-----------	------------------



20 W	ON/ OFF
---------	------------

Lm	K	Diffuser		Code
2357	4000	(1)	75°	19.3051.5101
2357	4000	(4)	70°	19.3051.5301
2161	4000	(3)	95°	19.3051.5201

27 W	ON/ OFF
---------	------------

Lm	K	Diffuser		Code
3360	4000	(1)	75°	19.3051.6101
3281	4000	(4)	70°	19.3051.6301
3008	4000	(3)	95°	19.3051.6201

41 W	ON/ OFF
---------	------------

Lm	K	Diffuser		Code
5313	4000	(1)	75°	19.3051.9701

IP20 IP44	CRI ≥80	100000h L80B10
--------------	------------	-------------------






TW (Tunable white)

31 W	
---------	---

Lm	K	Diff.		Code
2700	2450-7000	(1)	75°	19.3051.0401
2637	2450-7000	(4)	70°	19.3051.0601
2417	2450-7000	(3)	95°	19.3051.0501

IP20 IP44	CRI ≥80	SDCM 2	83000h L90B10
--------------	------------	-----------	------------------



41 W	ON/ OFF
---------	------------

Lm	K	Diffuser		Code
5189	4000	(4)	70°	19.3051.9901
4757	4000	(3)	95°	19.3051.9801



Features

Die-cast aluminum casting. This technology significantly increases the possibility to apply a specific luminaire due to lighter the ceiling has, since additional cooling radiator is not required. The luminaire is aimed at prestigious interiors such as hotels, banks and high level offices. the application of newest components and renowned producers of LEDs, it was possible to build such luminaires, comparing with traditional solutions.

CE



IP20
IP44

IK

04

LED

CRI

≥80

SDCM

3

DRIVER

INCL.

220
240

V

50
60

Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.





Body: Aluminium
Diffuser:
(1) = Hardened transparent glass
(2) = Transparent PMMA
(3) = PLX (PMMA opal)

Installation: Ceiling / Recessed

LED personalisation
Check all types of LEDs on guide´s page 23

50000h
L70B10





14
W

Lm	K	Diffuser		Code
1316	4000	(2)	40°	19.3238.0002
1203	4000	(3)	85°	19.3238.0004

Recessed Downlights

62000h
L70B10



20
W

Lm	K	Diffuser		Code
2385	4000	(1)	75°	19.3238.0006
1964	4000	(3)	100°	19.3238.0008

Indoor

Beryl New O
Beryl New O Compact
Beryl O

Beryl SQ
Beryl New



Features

Downlight made of injected aluminium, with plastic front and polycarbonate diffuser. The heat sink design provides excellent heat dissipation. LED and equipment included.

CE

IP20

IP44

LED

CRI

≥80

50000h

L70B10

DRIVER

INCL.

220

240

V

50

60

Hz


Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium
Diffuser: Matt polycarbonate

Installation: Ceiling / Recessed



Ø95




Lm	K		Code
738	3000	80°	11.1546.3108
758	4000	80°	11.1546.4108



Lm	K		Code
738	3000	80°	11.1546.3100
758	4000	80°	11.1546.4100



Lm	K		Code
738	3000	80°	11.1546.3101
758	4000	80°	11.1546.4101



Ø120




Lm	K		Code
1310	3000	80°	11.1546.3158
1362	4000	80°	11.1546.4158



Lm	K		Code
1310	3000	80°	11.1546.3150
1362	4000	80°	11.1546.4150



Lm	K		Code
1310	3000	80°	11.1546.3151
1362	4000	80°	11.1546.4151



Ø175




Lm	K		Code
2253	3000	80°	11.1546.3248
2393	4000	80°	11.1546.4248



Lm	K		Code
2253	3000	80°	11.1546.3240
2393	4000	80°	11.1546.4240



Lm	K		Code
2253	3000	80°	11.1546.3241
2393	4000	80°	11.1546.4241



Ø200



Lm	K		Code
3295	3000	80°	11.1546.3358
3494	4000	80°	11.1546.4358



Lm	K		Code
3295	3000	80°	11.1546.3350
3494	4000	80°	11.1546.4350



Lm	K		Code
3295	3000	80°	11.1546.3351
3494	4000	80°	11.1546.4351



Lm	K		Code
3836	3000	80°	11.1546.3428
4094	4000	80°	11.1546.4428



Lm	K		Code
3836	3000	80°	11.1546.3420
4094	4000	80°	11.1546.4420



Lm	K		Code
3836	3000	80°	11.1546.3421
4094	4000	80°	11.1546.4421

Beryl New O
Beryl New O Compact
Beryl O

Beryl SQ 
Beryl New K



Features

Body made of injected aluminium with a synthetic material frame. Downlight set up a Polycarbonate diffuser and a square reflector. Reflector is aluminized in high vacuum. Heatsink design provides excellent heat dissipation. Built-in LEDs and remote driver.

CE



IP20

IP54

IK

08



850°

LED

CRI

≥80

SDCM

3

50000h

L70B10

DRIVER

INCL.

220

240

V

50

60

Hz

Standard finishes
Add needed finish to complete the product reference.

.33

Body: Aluminium body plastic ring.

Installation: Ceiling / Recessed



Lm	K		Code
1222	3000	55°	11.2046.3128
1319	4000	55°	11.2046.4128



Lm	K		Code
1222	3000	55°	11.2046.3120
1319	4000	55°	11.2046.4120



Lm	K		Code
1222	3000	55°	11.2046.3121
1319	4000	55°	11.2046.4121

95 x 95



Lm	K		Code
2079	3000	60°	11.2046.3248
2245	4000	60°	11.2046.4248



Lm	K		Code
2079	3000	60°	11.2046.3240
2245	4000	60°	11.2046.4240



Lm	K		Code
2079	3000	60°	11.2046.3241
2245	4000	60°	11.2046.4241

135 x 135



Lm	K		Code
3964	3000	80°	11.2046.3328
4280	4000	80°	11.2046.4328



Lm	K		Code
3964	3000	80°	11.2046.3320
4280	4000	80°	11.2046.4320



Lm	K		Code
3964	3000	80°	11.2046.3321
4280	4000	80°	11.2046.4321

195 x 195



Lm	K		Code
4540	3000	80°	11.2046.3428
4900	4000	80°	11.2046.4428



Lm	K		Code
4540	3000	80°	11.2046.3420
4900	4000	80°	11.2046.4420



Lm	K		Code
4540	3000	80°	11.2046.3421
4900	4000	80°	11.2046.4421



Features

Body of die-cast aluminium. The luminaire has the ability to adjust the optics in two planes (in the vertical axis by 359° and to the left and right 15°). Note: the colour of the frame and the colour of the casting has a slightly different shade than the color of the inner reflector cover.

CE

IP20
IP44

IK
04

359°

15°

LED

SDCM
2

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.04

.33

Body: Aluminium
Diffuser:
(1) = Transparent glass
(2) = Transparent PMMA
(3) = PLX (PMMA opal)
(4) = Micro-PRM (micro-prismatic diffuser PMMA)



Installation: Ceiling / Recessed

LED personalisation
Check all types of LEDs on guide´s page 23



CRI
≥80

83000h
L90B10



14
W


ON/
OFF

Lm	K	Diffuser	▲	Code
1274	4000	(2)	45°	19.3046.2101



CRI
≥80



83000h
L90B10



29
W

ON/
OFF



Lm	K	Diffuser	▲	Code
2329	4000	(3)	85°	19.3047.1201



43
W

ON/
OFF

Lm	K	Diffuser	▲	Code
3822	4000	(2)	45°	19.3048.1101
4149	4000	(4)	60°	19.3048.1301
3494	4000	(3)	85°	19.3048.1201



54
W


ON/
OFF

Lm	K	Diffuser	▲	Code
5096	4000	(2)	45°	19.3049.1101
5532	4000	(4)	60°	19.3049.1301
4659	4000	(3)	85°	19.3049.1201



CRI
≥80

83000h
L90B10



54
W

ON/
OFF


Lm	K	Diffuser	▲	Code
5096	4000	(2)	45°	19.3050.1101
5532	4000	(4)	60°	19.3050.1301
4659	4000	(3)	85°	19.3050.1201

Beryl

Recessed Downlights




Indoor

LUXIONA troll



CRI
≥80

84000h
L90B10



27
W



Lm	K	Diffuser		Code
2734	4000	(3)	-	19.3046.4203



CRI
≥85

10000h
L80B10



TW (Tunable white)



16
W





Lm	K	Diff.		Code
1615	2450-7000	(2)	-	19.3046.5101



CRI
≥80



84000h
L90B10



54
W



Lm	K	Diffuser		Code
6587	4000	(1)	-	19.3047.2101
5812	4000	(4)	-	19.3047.2301
5425	4000	(3)	-	19.3047.2201



81
W




Lm	K	Diffuser		Code
9881	4000	(1)	-	19.3048.2101
8718	4000	(4)	-	19.3048.2301
8137	4000	(3)	-	19.3048.2201



CRI
≥80

84000h
L90B10





620 x 145

108
W

ON/
OFF

Lm	K	Diffuser		Code
13175	4000	(1)	-	19.3049.2101
11625	4000	(4)	-	19.3049.2301
10850	4000	(3)	-	19.3049.2201




315 x 315

108
W

ON/
OFF

Lm	K	Diffuser		Code
13175	4000	(1)	-	19.3050.2101
11625	4000	(4)	-	19.3050.2301
10850	4000	(3)	-	19.3050.2201

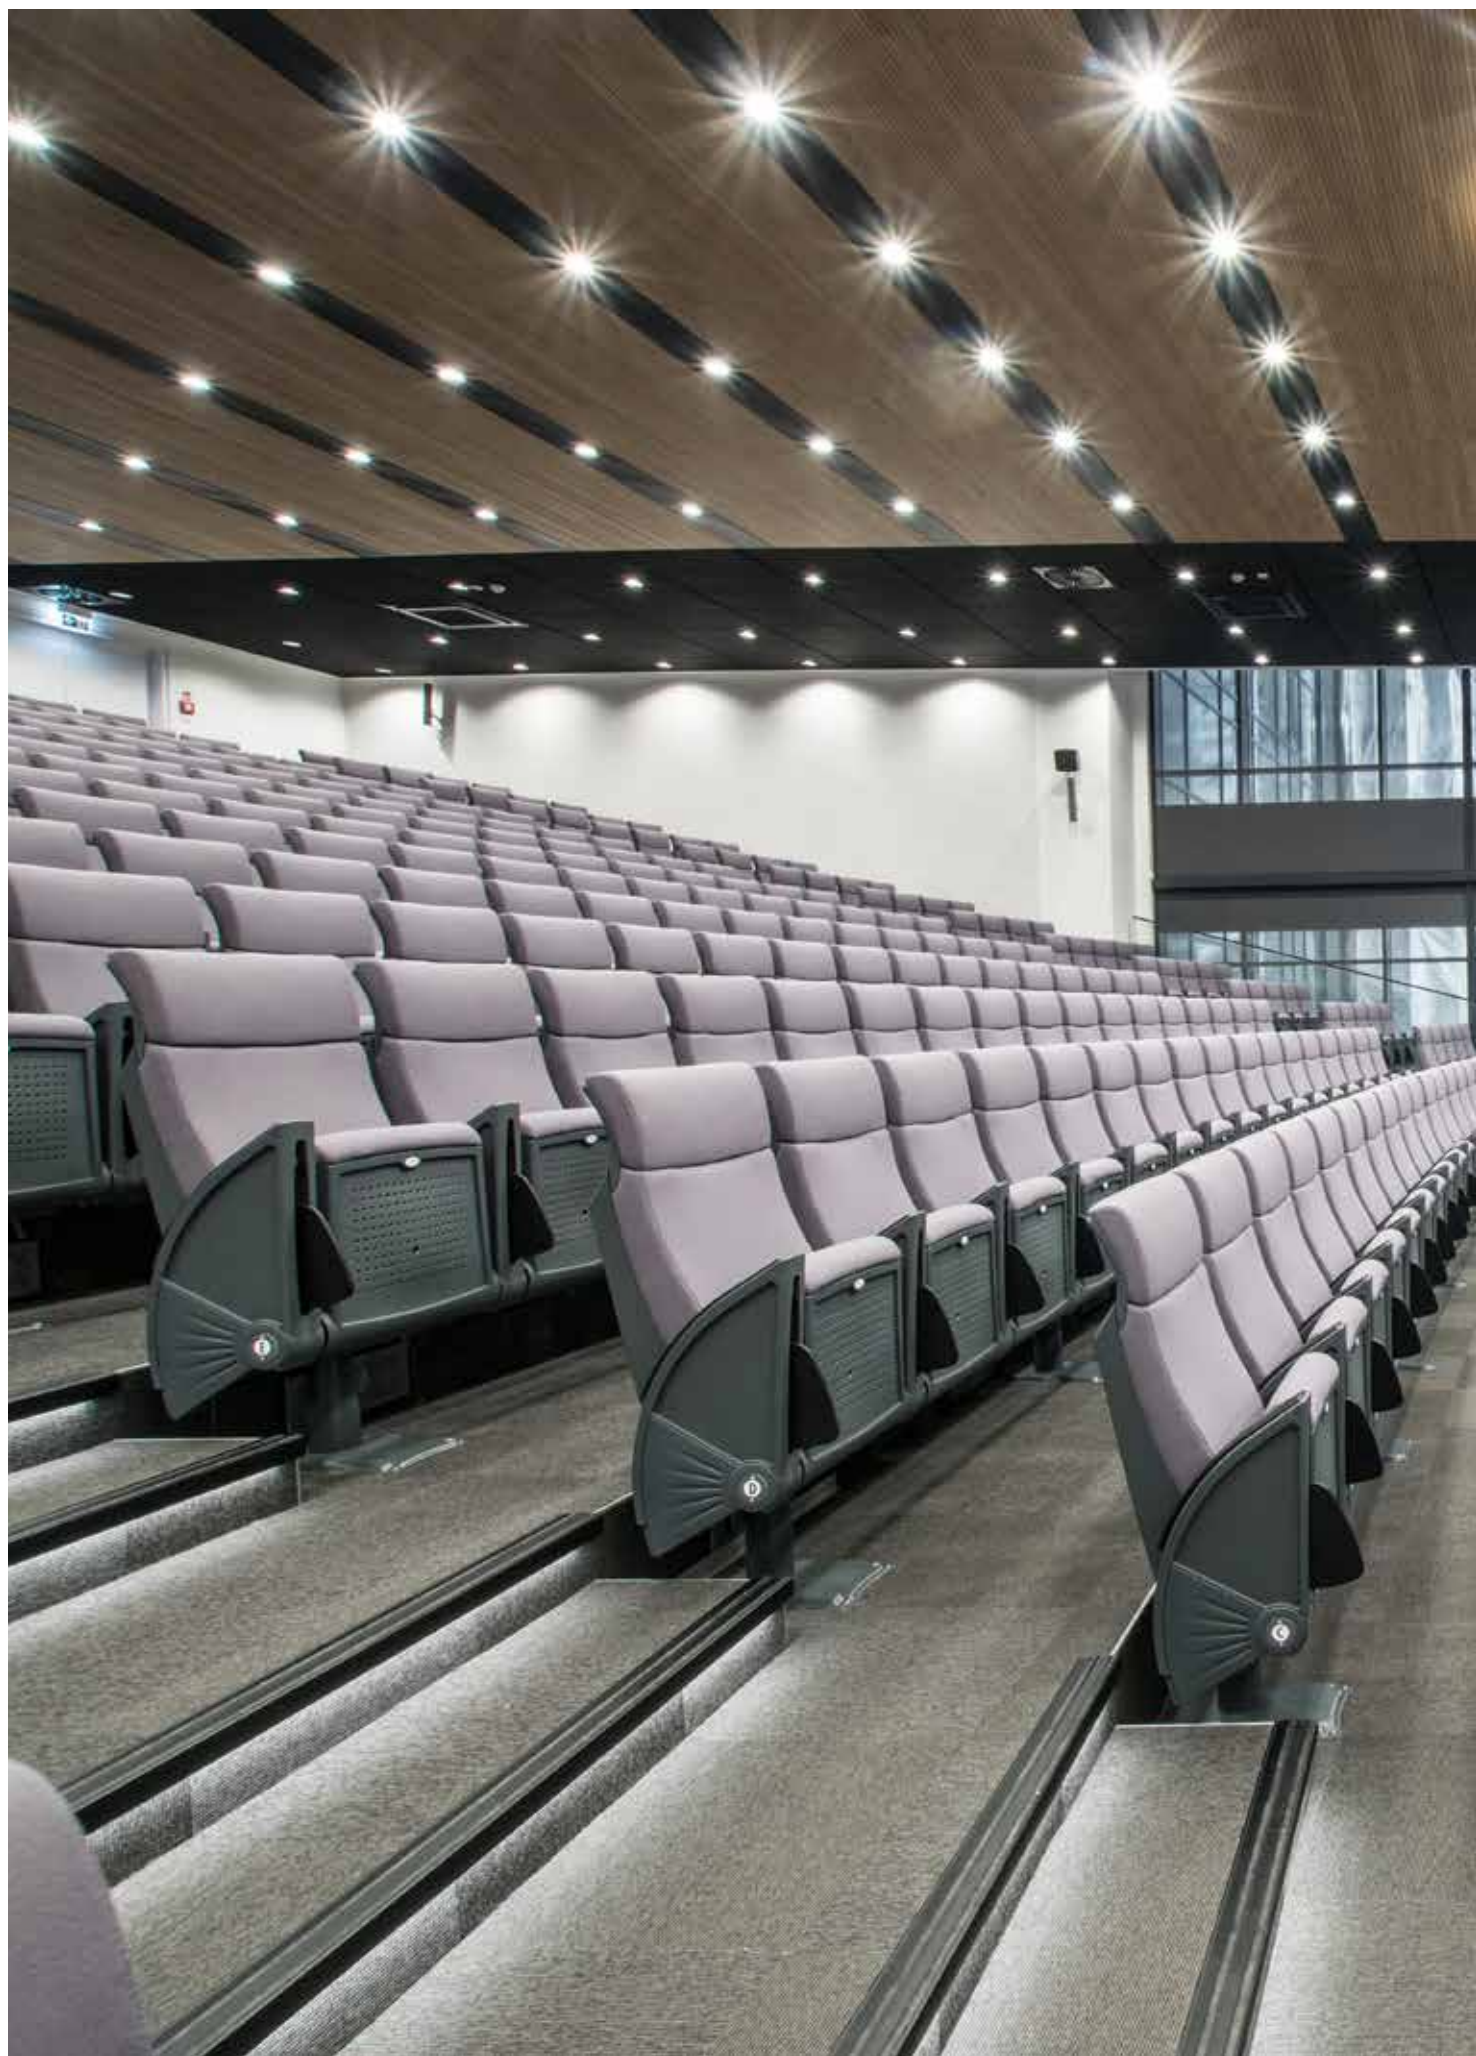





Features

Body made of lacquered steel sheet, black or white according to version. Adjustable injected aluminium square ring-pulls. Exterior square trim with finishes in white and grey. Stainless steel springs. With cable branching units and a circuit board.



GU10 LED Light source not included

Standard finishes
Add needed finish to complete the product reference.





Other finishes
Ask us for custom colours.

Body: Luminaire body made from lacquered stainless steel sheet with head lights built in die-cast aluminium.

Installation: Ceiling / Recessed




100x100





15W
max.

Lamp Holder	Code
GU 10	11.0452.1001




172




15W
max. x 2

Lamp Holder	Code
GU 10	11.0452.1002



245



15W
max. x 3

Lamp Holder	Code
GU 10	11.0452.1003

Zas

Recessed Downlights

Indoor

LUXIONA troll

Microdownlights

Microlinear



Features

LED minimalist luminaire with built-in rectangular format. Body made of die-cast aluminium with a black polycarbonate buffer. Optical system designed to provide a dim arrangement of light with highly efficient reflectors and a transparent microprismatic PMMA diffuser with optimized geometrical texture. A special acrylic material layer combines with the reflector luminous distribution to ensure a comfortable level of lighting. It includes the electrical equipment that connects to the luminaire. The microlinear system is specifically designed for facilities of hospitality sector, such as hotels and cafés, as well as residential and office sectors.

CE

IP20
IP44

LED

CRI
≥90

SDCM
3

60000h
L80B10

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options. (2W not available)

Standard finishes
Add needed finish to complete the product reference.






.04

.63



Body: Die-cast aluminium with plastic buffer in black

Installation: Recessed / Ceiling

LED personalisation
Check all types of LEDs on guide´s page 23




Lm	K	▲	Code
136	2700	18°	11.1701.1211
138	2700	25°	11.1701.1221
136	2700	45°	11.1701.1241
156	3000	18°	11.1701.1311
157	3000	25°	11.1701.1321
156	3000	45°	11.1701.1341



Lm	K	▲	Code
324	2700	18°	11.1701.2211
336	2700	25°	11.1701.2221
324	2700	45°	11.1701.2241
344	3000	18°	11.1701.2311
357	3000	25°	11.1701.2321
344	3000	45°	11.1701.2341





Lm	K	▲	Code
324	2700	18°	11.1701.2213
336	2700	25°	11.1701.2223
324	2700	45°	11.1701.2243
344	3000	18°	11.1701.2313
357	3000	25°	11.1701.2323
344	3000	45°	11.1701.2343



Lm	K	▲	Code
804	2700	18°	11.1701.3211
782	2700	25°	11.1701.3221
804	2700	45°	11.1701.3241
824	3000	18°	11.1701.3311
803	3000	25°	11.1701.3321
824	3000	45°	11.1701.3341




Lm	K	▲	Code
804	2700	18°	11.1701.3213
782	2700	25°	11.1701.3223
804	2700	45°	11.1701.3243
824	3000	18°	11.1701.3313
803	3000	25°	11.1701.3323
824	3000	45°	11.1701.3343



Lm	K	▲	Code
1715	2700	18°	11.1701.4211
1675	2700	25°	11.1701.4221
1715	2700	45°	11.1701.4241
1735	3000	18°	11.1701.4311
1695	3000	25°	11.1701.4321
1735	3000	45°	11.1701.4341



Lm	K	▲	Code
1715	2700	18°	11.1701.4213
1675	2700	25°	11.1701.4223
1715	2700	45°	11.1701.4243
1735	3000	18°	11.1701.4313
1695	3000	25°	11.1701.4323
1735	3000	45°	11.1701.4343



Lm	K	▲	Code
2476	2700	18°	11.1701.5211
2441	2700	25°	11.1701.5221
2476	2700	45°	11.1701.5241
2495	3000	18°	11.1701.5311
2461	3000	25°	11.1701.5321
2495	3000	45°	11.1701.5341



Lm	K	▲	Code
2476	2700	18°	11.1701.5213
2441	2700	25°	11.1701.5223
2476	2700	45°	11.1701.5243
2495	3000	18°	11.1701.5313
2461	3000	25°	11.1701.5323
2495	3000	45°	11.1701.5343





Focus



Features

Optical system les-reflector. The reflector and the sink are made of aluminium. Strings included in the secondary reflector's body, which is the mounting ring-pull at the same time. Focus is designed for professional projects that aim to set the difference in terms of space arrangement. It is suitable for stores, offices, hotels and restaurants projects, as well as for residential areas where integration, power saving and durability are important.

CE		IP20 IP44		850°
LED	CRI ≥90	SDCM 3	60000h L80B10	UGR <19

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------



Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium

Installation: Recessed / Ceiling



5
W

Lm	K		Code
333	2700	15°	11.1704.1121
325	2700	24°	11.1704.1122
318	2700	38°	11.1704.1123
343	3000	15°	11.1704.1131
335	3000	24°	11.1704.1132
328	3000	38°	11.1704.1133
374	4000	15°	11.1704.1141
365	4000	24°	11.1704.1142
357	4000	38°	11.1704.1143

12
W

Lm	K		Code
862	2700	15°	11.1704.4121
862	2700	24°	11.1704.4122
865	2700	38°	11.1704.4123
888	3000	15°	11.1704.4131
888	3000	24°	11.1704.4132
874	3000	38°	11.1704.4133
968	4000	15°	11.1704.4141
968	4000	24°	11.1704.4142
953	4000	38°	11.1704.4143

Focus

Recessed Downlights

Indoor

LUXIONA **troll**



Features

Optics Comfort is a synonym of efficiency and ease It sets up an efficient reflector with much visual comfort that limits eyestrain and improves user's welfare. It is specifically designed to light up work and study spaces, as well as for the general lighting of areas where glare is an important factor to be taken into account.

Optics Elite includes newest generation LED CoB, high performance, with passive dissipation, a reflector of anodized aluminium and a secondary reflector of steel sheet, white painted. Version specifically designed for spaces with as much as 6m heights.

CE

850°

LED

CRI
≥80

SDCM
3

60000h
L90B10

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Installation: Recessed / Ceiling

LED personalisation
Check all types of LEDs on guide´s page 23

Optics Comfort

IP20
IP40

Body: Built in synthetic material with aluminium heat-sink.



14 W ON/OFF UGR <19

Lm	K		Code
1570	3000	80°	11.1703.1301
1721	4000	80°	11.1703.1401

14 W 1-10V UGR <19

Lm	K		Code
1570	3000	80°	11.1703.1302
1721	4000	80°	11.1703.1402

14 W DALI UGR <19

Lm	K		Code
1570	3000	80°	11.1703.1303
1721	4000	80°	11.1703.1403

14 W Emerg. th. UGR <19

Lm	K		Code
1570	3000	80°	11.1703.1304
1721	4000	80°	11.1703.1404

19 W ON/OFF UGR <19

Lm	K		Code
2214	3000	80°	11.1703.2301
2412	4000	80°	11.1703.2401

19 W 1-10V UGR <19

Lm	K		Code
2214	3000	80°	11.1703.2302
2412	4000	80°	11.1703.2402

19 W DALI UGR <19

Lm	K		Code
2214	3000	80°	11.1703.2303
2412	4000	80°	11.1703.2403

19 W Emerg. th. UGR <19

Lm	K		Code
2214	3000	80°	11.1703.2304
2412	4000	80°	11.1703.2404

36 W ON/OFF

Lm	K		Code
3669	3000	80°	11.1703.3301
3999	4000	80°	11.1703.3401

36 W 1-10V

Lm	K		Code
3669	3000	80°	11.1703.3302
3999	4000	80°	11.1703.3402

36 W DALI

Lm	K		Code
3669	3000	80°	11.1703.3303
3999	4000	80°	11.1703.3403

36 W Emerg. th.

Lm	K		Code
3669	3000	80°	11.1703.3304
3999	4000	80°	11.1703.3404

TW (Tunable white)



14 W DALI UGR <19

Lm	K		Code
1340	2700-6000	80°	11.1703.1009


23 W DALI UGR <19

Lm	K		Code
2195	2700-6000	80°	11.1703.2009

Optics Elite

IP
20

Body: Made from stainless steel sheet with secondary reflector, heat-sink and antiglare element built in aluminium.



59 W ON/OFF UGR <16


Lm	K		Code
6292	3000	50°	0585L/E6083
6595	4000	50°	0585L/E6084
6302	3000	25°	0585L/I6083
6600	4000	25°	0585L/I6084

59 W 1-10V UGR <16

Lm	K		Code
6292	3000	50°	0585L/E6083D
6595	4000	50°	0585L/E6084D
6302	3000	25°	0585L/I6083D
6600	4000	25°	0585L/I6084D

59 W DALI UGR <16

Lm	K		Code
6292	3000	50°	0585L/E6083DD
6595	4000	50°	0585L/E6084DD
6302	3000	25°	0585L/I6083DD
6600	4000	25°	0585L/I6084DD

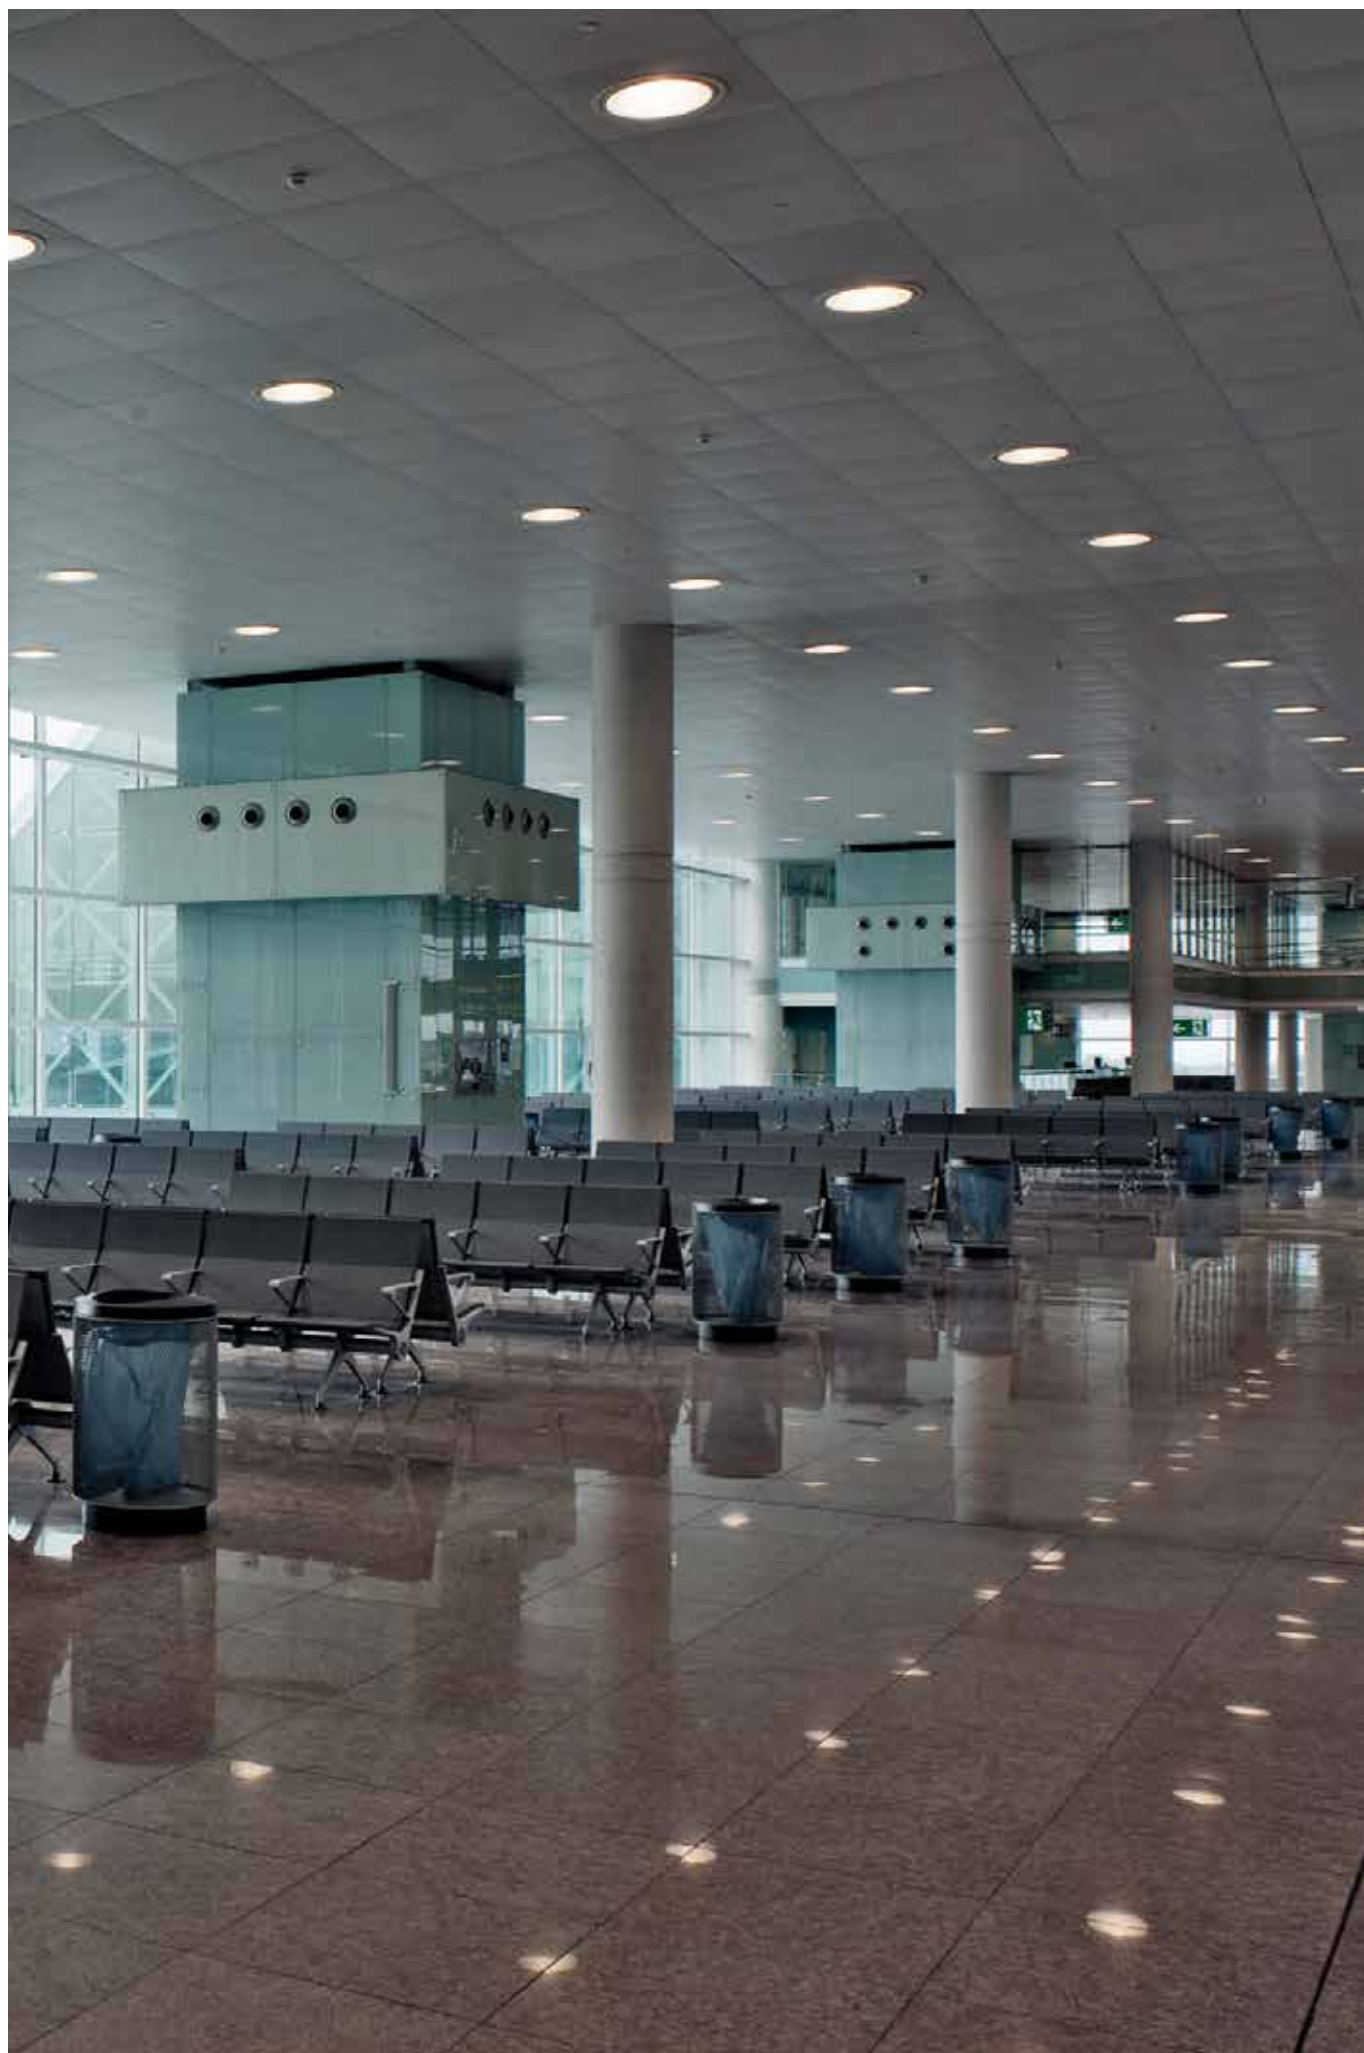

Angle



Features

Body of injected aluminium. High pureness aluminium reflector and stee strings. System for tilting, optical orientation at any point of a semi-sphere.

CE

IP20

IP44

IK

04

LED

CRI

≥80

SDCM

3

50000h

L80B10

DRIVER

INCL.

220

240

V

50

60

Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.21


.33

Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: Tempered glass

Installation: Ceiling / Recessed

LED personalisation
Check all types of LEDs on guide´s page 23



21 W ON/OFF

Lm	K	Beam Angle	Code
2032	3000	20°	19.3201.0001
2042	4000	20°	19.3201.0002
2056	3000	40°	19.3201.0005
2118	4000	40°	19.3201.0006
1946	3000	60°	19.3201.0009
2004	4000	60°	19.3201.0010

21 W

Lm	K	Beam Angle	Code
1983	3000	20°	19.3201.0003
2042	4000	20°	19.3201.0004
2056	3000	40°	19.3201.0007
2118	4000	40°	19.3201.0008
1946	3000	60°	19.3201.0011
2004	4000	60°	19.3201.0012

28 W ON/OFF

Lm	K	Beam Angle	Code
2881	3000	20°	19.3201.0013
2966	4000	20°	19.3201.0014
3044	3000	40°	19.3201.0017
3134	4000	40°	19.3201.0018
2881	3000	60°	19.3201.0021
2966	4000	60°	19.3201.0022

28 W

Lm	K	Beam Angle	Code
2935	3000	20°	19.3201.0015
3022	4000	20°	19.3201.0016
3044	3000	40°	19.3201.0019
3134	4000	40°	19.3201.0020
2881	3000	60°	19.3201.0023
2966	4000	60°	19.3201.0024

Downled

Downled C ^N
Downled



Features

Downled C
Hdownlight of high pressure die-cast aluminium. High quality primary reflector made of aluminized polycarbonate. The downlights include latest generation LEDs CoB and a remote electrical control.

Downled
Downlight made of aluminium, injected aluminium sink. It includes a universal joint rotation system of 30° in two directions. High quality aluminium reflectors. Latest generation LED CoB, electrical equipment included.

Installation: Recessed / Ceiling

CE

850°

LED

CRI ≥80

DRIVER INCL.

220 240 V

50 60 Hz

Consult for dimming options.

Downled C ^N

Standard finishes
Add needed finish to complete the product reference.

Body: Aluminium


.04

.33

IP 20

50000h L70B10

SDCM 3



20 W

ON/OFF

Lm	K		Code
1730	2700	70°	11.1965.1241
1869	3000	70°	11.1965.1341
2018	4000	70°	11.1965.1441

Downloaded

Standard finishes
Add needed finish to complete the product reference.


Body: Die-cast aluminium



IP20
IP44

30°

50000h
L70B10



7 W

ON/
OFF

Lm	K		Code
461	3000	20°	0147L/8320
452	3000	40°	0147L/8340
483	4000	20°	0147L/8420
475	4000	40°	0147L/8440

7 W

1-10V

Lm	K		Code
461	3000	20°	0147L/8320D
452	3000	40°	0147L/8340D
483	4000	20°	0147L/8420D
475	4000	40°	0147L/8440D


7 W

DALI

Lm	K		Code
461	3000	20°	0147L/8320DD
452	3000	40°	0147L/8340DD
483	4000	20°	0147L/8420DD
475	4000	40°	0147L/8440DD

IP20
IP65

50000h
L70B10



8 W

ON/
OFF

Lm	K		Code
420	3000	50°	11.0147.1311
490	4000	50°	11.0147.1411

8 W

1-10V

Lm	K		Code
420	3000	50°	11.0147.1312
490	4000	50°	11.0147.1412

8 W

DALI

Lm	K		Code
420	3000	50°	11.0147.1313
490	4000	50°	11.0147.1413

Downloaded

Recessed Downlights

Indoor

LUXIONA troll



Features

LED Downlight, created for built-in mounting on ceilings with a performance of minimum consumption and a low built-in profile. An excellent solution for practical general lighting at offices, back rooms, passages, staircases. Body made of injected polycarbonate with opal diffuser. Driver included.

CE

IP20
IP44

850°

DRIVER
INCL.

220
240 V

50
60 Hz

LED


CRI
≥80

Standard finishes
Add needed finish to complete the product reference.

Body: PC
Diffuser: Opal

.33

Installation: Recessed / Ceiling




12
W

Lm	K		Code
1046	3000	110°	11.1525.1301
1183	4000	110°	11.1525.1401

Ecoled

Recessed Downlights



18
W

Lm	K		Code
1593	3000	110°	11.1525.1311
1773	4000	110°	11.1525.1411

Indoor

LUXIONA **troll**

192
Backlite


204
Panel

214
Softlight

200
Domino

208
Agat

218
Mosaic

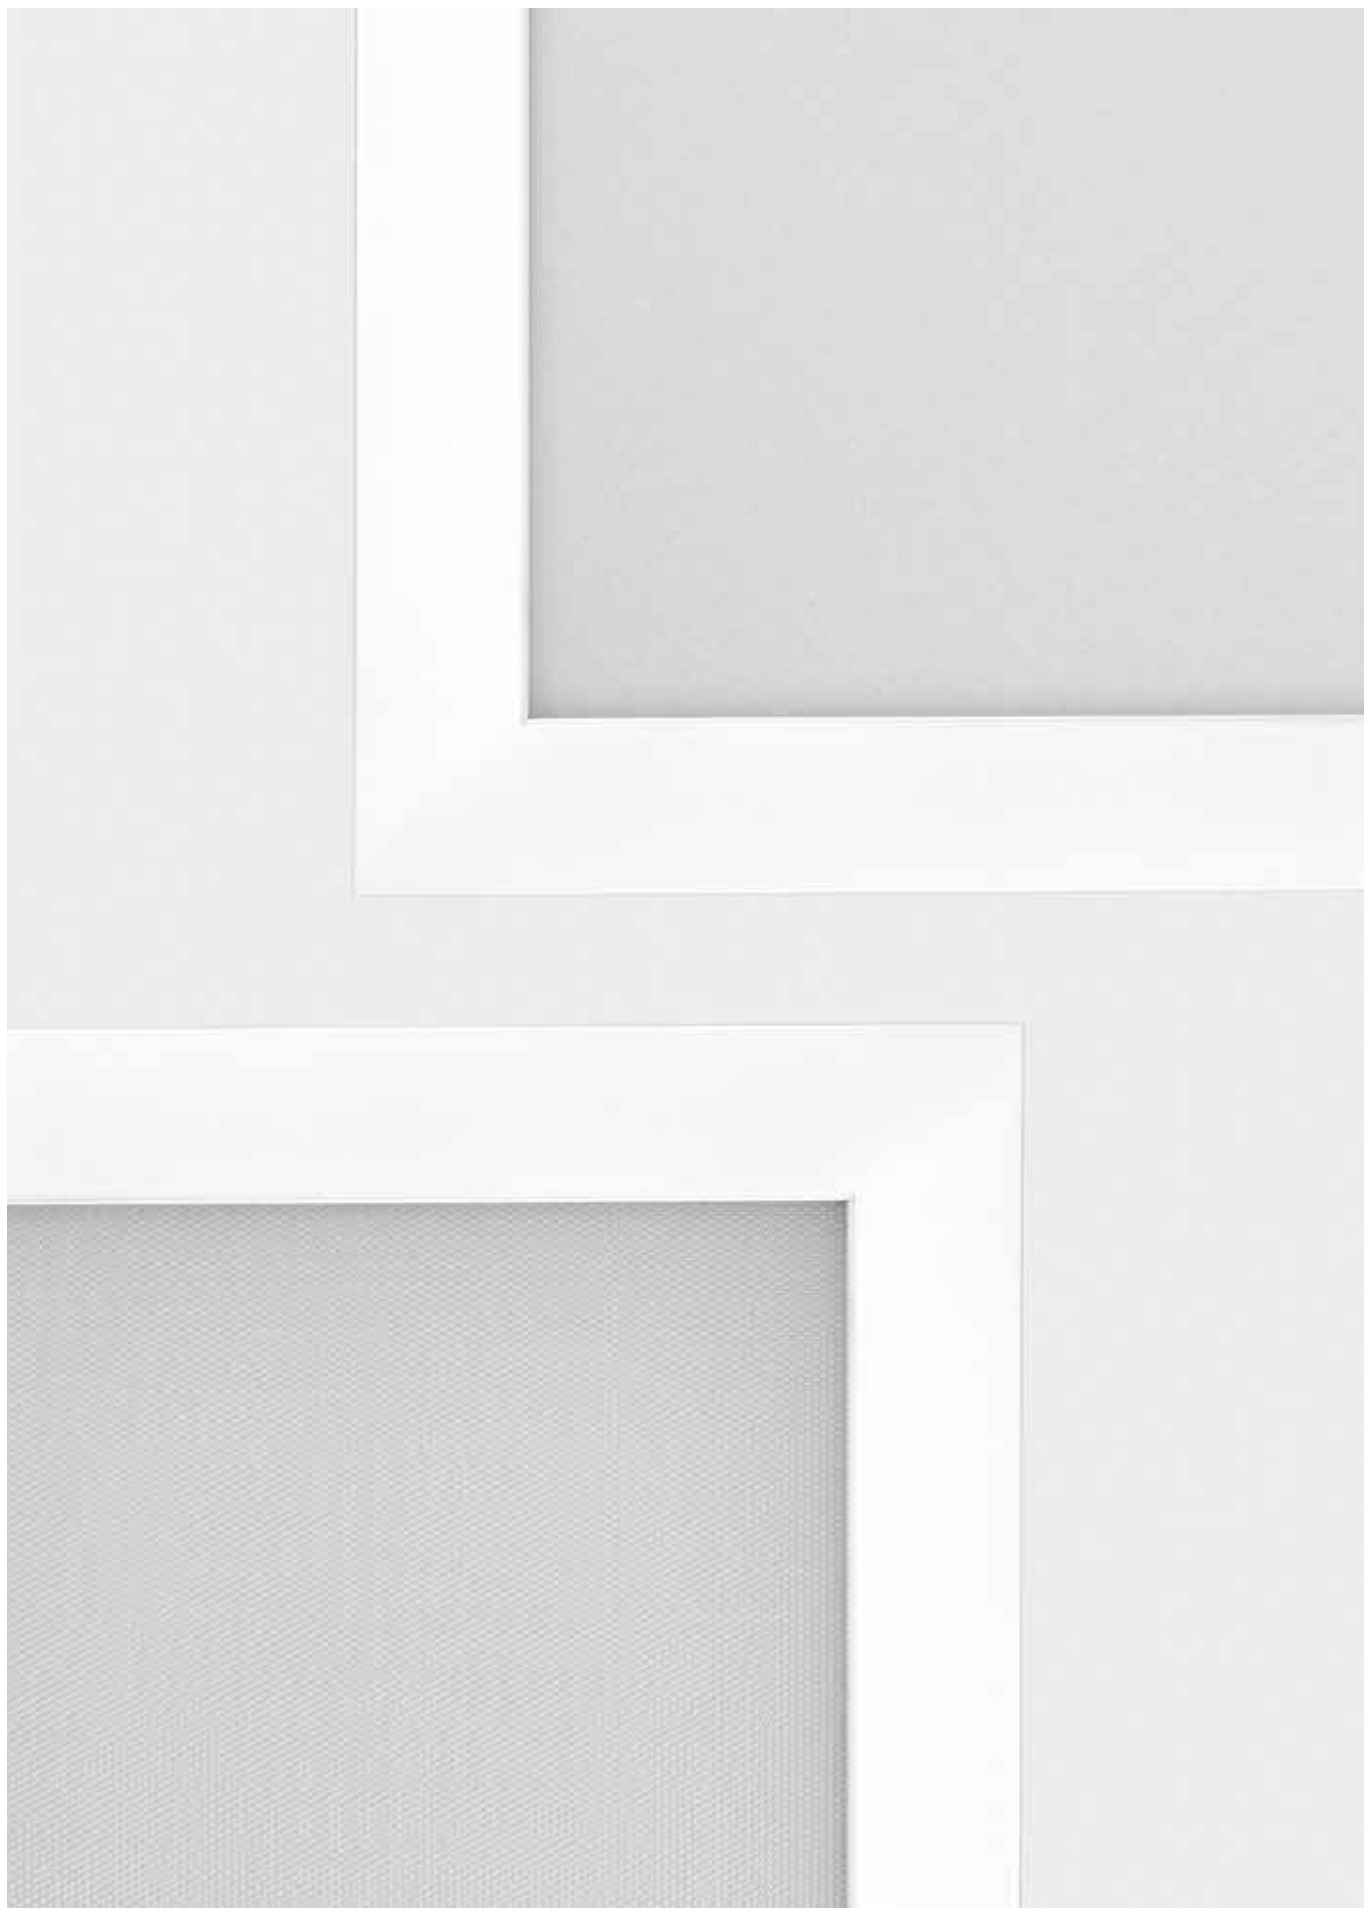

Backlite is a design by TROLL for general lighting use. It is made up of LED technology-based zenith lighting sources and an opal diffuser that allow to optimise lighting distribution in spaces. Backlite offers efficient and practical lasting solutions to light up commercial or work areas.

Backlite

Recessed Luminaires

Indoor

LUXIONA troll



Features

Body made of white painted sheet steel with plastic (600x600 mm) or aluminium (1200x300 mm and 1200x600 mm) frame, body height 35 mm.

Optical compartment consisting of PMMA lenses combined with prismatic (UGR <19) or opal diffuser.

Different formats available: 600x600, 1200x300 or 1200x600.

Suitable for installation in most conventional ceilings, both in profiles and in plasterboard thanks to the recessed frames.

CE

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.33

.34

Body: Aluminum / steel sheet
Diffuser:
(1) Opal
(2) Micro-prismatic
(3) PLX (PMMA opal)



Installation: Ceiling / Recessed



Diffuser: (1) Opal




Diffuser: (2) Micro-prismatic



Lm	K	UGR	Diff.		Code
3452	3000	-	(1) 114°		11.3847.1301
3162	3000	<19	(2) 80°		11.3847.1311
3652	4000	-	(1) 114°		11.3847.1401
3347	4000	<19	(2) 80°		11.3847.1411

Lm	K	UGR	Diff.		Code
3452	3000	-	(1) 114°		11.3847.1302
3162	3000	<19	(2) 80°		11.3847.1312
3652	4000	-	(1) 114°		11.3847.1402
3347	4000	<19	(2) 80°		11.3847.1412


Lm	K	UGR	Diff.		Code
3452	3000	-	(1) 114°		11.3847.1303
3162	3000	<19	(2) 80°		11.3847.1313
3652	4000	-	(1) 114°		11.3847.1403
3347	4000	<19	(2) 80°		11.3847.1413



Lm	K	UGR	Diff.		Code
3452	3000	-	(1) 114°		11.3847.2301
3162	3000	<19	(2) 80°		11.3847.2311
3652	4000	-	(1) 114°		11.3847.2401
3347	4000	<19	(2) 80°		11.3847.2411

Lm	K	UGR	Diff.		Code
3452	3000	-	(1) 114°		11.3847.2302
3162	3000	<19	(2) 80°		11.3847.2312
3652	4000	-	(1) 114°		11.3847.2402
3347	4000	<19	(2) 80°		11.3847.2412

Lm	K	UGR	Diff.		Code
3452	3000	-	(1) 114°		11.3847.2303
3162	3000	<19	(2) 80°		11.3847.2313
3652	4000	-	(1) 114°		11.3847.2403
3347	4000	<19	(2) 80°		11.3847.2413



Lm	K	UGR	Diff.		Code
6302	3000	-	(1) 114°		11.3847.3301
6100	3000	<19	(2) 80°		11.3847.3311
7013	4000	-	(1) 114°		11.3847.3401
6694	4000	<19	(2) 80°		11.3847.3411

Lm	K	UGR	Diff.		Code
6302	3000	-	(1) 114°		11.3847.3302
6100	3000	<19	(2) 80°		11.3847.3312
7013	4000	-	(1) 114°		11.3847.3402
6694	4000	<19	(2) 80°		11.3847.3412

Lm	K	UGR	Diff.		Code
6302	3000	-	(1) 114°		11.3847.3303
6100	3000	<19	(2) 80°		11.3847.3313
7013	4000	-	(1) 114°		11.3847.3403
6694	4000	<19	(2) 80°		11.3847.3413

Accessories



11.3847.0001
Surface mounting KIT
600x600x70

11.3847.0002
Surface mounting KIT
300x1200x70





11.3847.0003
Surface mounting KIT
600x1200x70



11.3847.0004
Suspended installation KIT

11.3847.0005
Plasterboard Mount KIT, (4 springs)



Profile 600 x 600



Lm	K	UGR	Diff.	▲	Code
3169	3000	-	(3)	110°	19.3213.0001
3342	4000	-	(3)	110°	19.3213.0002
3111	3000	<19	(2)	90°	19.3213.0005
3281	4000	<19	(2)	90°	19.3213.0006



Lm	K	UGR	Diff.	▲	Code
3169	3000	-	(3)	110°	19.3213.0003
3342	4000	-	(3)	110°	19.3213.0004
3111	3000	<19	(2)	90°	19.3213.0007
3281	4000	<19	(2)	90°	19.3213.0008



Lm	K	UGR	Diff.	▲	Code
4075	3000	-	(3)	110°	19.3213.0009
4297	4000	-	(3)	110°	19.3213.0010
4000	3000	<19	(2)	90°	19.3213.0013
4218	4000	<19	(2)	90°	19.3213.0014




Lm	K	UGR	Diff.	▲	Code
4075	3000	-	(3)	110°	19.3213.0011
4297	4000	-	(3)	110°	19.3213.0012
4000	3000	<19	(2)	90°	19.3213.0015
4218	4000	<19	(2)	90°	19.3213.0016



Lm	K	UGR	Diff.	▲	Code
4754	3000	-	(3)	110°	19.3213.0017
5014	4000	-	(3)	110°	19.3213.0018
4666	3000	<19	(2)	90°	19.3213.0021
4921	4000	<19	(2)	90°	19.3213.0022



Lm	K	UGR	Diff.	▲	Code
4754	3000	-	(3)	110°	19.3213.0019
5014	4000	-	(3)	110°	19.3213.0020
4666	3000	<19	(2)	90°	19.3213.0023
4921	4000	<19	(2)	90°	19.3213.0024



Profile 1200 x 300



Lm	K	UGR	Diff.	▲	Code
3169	3000	-	(3)	110°	19.3213.0025
3342	4000	-	(3)	110°	19.3213.0026
3111	3000	<19	(2)	90°	19.3213.0029
3281	4000	<19	(2)	90°	19.3213.0030



Lm	K	UGR	Diff.	▲	Code
3169	3000	-	(3)	110°	19.3213.0027
3342	4000	-	(3)	110°	19.3213.0028
3111	3000	<19	(2)	90°	19.3213.0031
3281	4000	<19	(2)	90°	19.3213.0032



Lm	K	UGR	Diff.	▲	Code
4075	3000	-	(3)	110°	19.3213.0033
4297	4000	-	(3)	110°	19.3213.0034
4000	3000	<19	(2)	90°	19.3213.0037
4218	4000	<19	(2)	90°	19.3213.0038



Lm	K	UGR	Diff.	▲	Code
4075	3000	-	(3)	110°	19.3213.0035
4297	4000	-	(3)	110°	19.3213.0036
4000	3000	<19	(2)	90°	19.3213.0039
4218	4000	<19	(2)	90°	19.3213.0040




Lm	K	UGR	Diff.	▲	Code
4754	3000	-	(3)	110°	19.3213.0041
5014	4000	-	(3)	110°	19.3213.0042
4666	3000	<19	(2)	90°	19.3213.0045
4921	4000	<19	(2)	90°	19.3213.0046



Lm	K	UGR	Diff.	▲	Code
4754	3000	-	(3)	110°	19.3213.0043
5014	4000	-	(3)	110°	19.3213.0044
4666	3000	<19	(2)	90°	19.3213.0047
4921	4000	<19	(2)	90°	19.3213.0048

.34	IP20 IP44	IK 04	100000h L80B10
-----	--------------	----------	-------------------



Profile 625 x 625



Lm	K	UGR	Diff.		Code
3169	3000	-	(3)	110°	19.3213.0049
3342	4000	-	(3)	110°	19.3213.0050
3111	3000	<19	(2)	90°	19.3213.0053
3281	4000	<19	(2)	90°	19.3213.0054



Lm	K	UGR	Diff.		Code
3169	3000	-	(3)	110°	19.3213.0051
3342	4000	-	(3)	110°	19.3213.0052
3111	3000	<19	(2)	90°	19.3213.0055
3281	4000	<19	(2)	90°	19.3213.0056



Lm	K	UGR	Diff.		Code
4075	3000	-	(3)	110°	19.3213.0057
4297	4000	-	(3)	110°	19.3213.0058
4000	3000	<19	(2)	90°	19.3213.0061
4218	4000	<19	(2)	90°	19.3213.0062






Lm	K	UGR	Diff.		Code
4075	3000	-	(3)	110°	19.3213.0059
4297	4000	-	(3)	110°	19.3213.0060
4000	3000	<19	(2)	90°	19.3213.0063
4218	4000	<19	(2)	90°	19.3213.0064



Lm	K	UGR	Diff.		Code
4754	3000	-	(3)	110°	19.3213.0065
5014	4000	-	(3)	110°	19.3213.0066
4666	3000	<19	(2)	90°	19.3213.0069
4921	4000	<19	(2)	90°	19.3213.0070



Lm	K	UGR	Diff.		Code
4754	3000	-	(3)	110°	19.3213.0067
5014	4000	-	(3)	110°	19.3213.0068
4666	3000	<19	(2)	90°	19.3213.0071
4921	4000	<19	(2)	90°	19.3213.0072




Accessories

19.3213.0073
600X600 surface installation
accessory

19.3213.0076
1,5M suspension accessory
600X600


19.3213.0079
Plaster ceiling recessed frame
600X600



19.3213.0074
Surface installation accessory
1200X300

19.3213.0077
1,5M suspension accessory
1200X300

19.3213.0080
Plaster ceiling recessed frame
1200X300



19.3213.0075
Surface installation
accessory 625X625

19.3213.0078
1,5M suspension accessory
625X625

19.3213.0081
Plaster ceiling recessed frame
625X625









Features

LED luminary to be mounted on suspended modular ceilings, cardboard suspended ceilings (using mounting clips or adaptive frame), directly on the ceiling (using ceiling sheet) or using ceiling sheet and suspensions. Equipped with highly efficient LED light sources. Domino uses an anti-glare louvre which reduces glare and directs light precisely. Casting made of steel sheet. Standard colour of the luminary is white. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80.

CE		IP 20	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.





Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PMMA lens wide + PC raster

Installation: Ceiling / Recessed / Suspended / Surface

LED personalisation
Check all types of LEDs on guide´s page 23



 141 x 141

4 W ON/OFF

Lm	K		Code
490	3000	75°	19.3200.5001
500	4000	75°	19.3200.5002

4 W 


Lm	K		Code
490	3000	75°	19.3200.5003
500	4000	75°	19.3200.5004

9 W ON/OFF

Lm	K		Code
985	3000	75°	19.3200.5005
1000	4000	75°	19.3200.5006

9 W 

Lm	K		Code
985	3000	75°	19.3200.5007
1000	4000	75°	19.3200.5008



 241 x 241

9 W ON/OFF UGR <19

Lm	K		Code
1000	4000	75°	19.3200.4002
985	3000	75°	19.3200.4006

9 W  UGR <19


Lm	K		Code
1000	4000	75°	19.3200.4004
985	3000	75°	19.3200.4008

13 W ON/OFF UGR <19

Lm	K		Code
1500	4000	75°	19.3200.4001
1475	3000	75°	19.3200.4005

13 W  UGR <19

Lm	K		Code
1500	4000	75°	19.3200.4003
1475	3000	75°	19.3200.4007




Profile 600 x 600

26 W	ON/ OFF	UGR <19
---------	------------	------------

Lm	K		Code
3444	4000	75°	19.3200.1001
3269	3000	75°	19.3200.1005

26 W		UGR <19
---------	--	------------

Lm	K		Code
3444	4000	75°	19.3200.1003
3269	3000	75°	19.3200.1007




Profile 600 x 600

40 W	ON/ OFF	UGR <19
---------	------------	------------

Lm	K		Code
5167	4000	75°	19.3200.1002
4903	3000	75°	19.3200.1006

40 W		UGR <19
---------	--	------------

Lm	K		Code
5169	4000	75°	19.3200.1004
4903	3000	75°	19.3200.1008




Profile 600 x 300

13 W	ON/ OFF	UGR <19
---------	------------	------------

Lm	K		Code
1722	4000	75°	19.3200.3001
1634	3000	75°	19.3200.3005

13 W		UGR <19
---------	--	------------

Lm	K		Code
1722	4000	75°	19.3200.3003
1634	3000	75°	19.3200.3007




Profile 600 x 300

26 W	ON/ OFF	UGR <19
---------	------------	------------

Lm	K		Code
3444	4000	75°	19.3200.3002
3269	3000	75°	19.3200.3006

26 W		UGR <19
---------	--	------------

Lm	K		Code
3444	4000	75°	19.3200.3004
3269	3000	75°	19.3200.3008




Profile 1200 x 300

26 W	ON/ OFF	UGR <19
---------	------------	------------

Lm	K	▲	Code
3444	4000	75°	19.3200.2001
3269	3000	75°	19.3200.2005

26 W		UGR <19
---------	--	------------

Lm	K	▲	Code
3444	4000	75°	19.3200.2003
3269	3000	75°	19.3200.2007



Profile 1200 x 300

53 W	ON/ OFF	UGR <19
---------	------------	------------

Lm	K	▲	Code
6889	4000	75°	19.3200.2002
6537	3000	75°	19.3200.2006

53 W		UGR <19
---------	--	------------

Lm	K	▲	Code
6889	4000	75°	19.3200.2004
6537	3000	75°	19.3200.2008


Accessories

**19.3200.0001**

Accessory with 4 staples to embed Domino 600X600 and 600X300 in plaster ceilings.

19.3200.0002

Accessory with 6 staples for recessing Domino 1200X300 in plaster ceiling

**19.3200.0004**


Accessory for surface installation or suspension Domino 600X600 (on / off)

19.3200.0005

Accessory for surface mounting or hanging Domino 600x600 (DALI)

19.3200.0006

Accessory for surface installation or suspension Domino 600X300 (on / off)

**19.3200.0007**

Accessory for surface mounting or hanging Domino 600X300 (DALI)

19.3200.0008

Accessory for surface mounting or hanging Domino 1200X300 (on / off)

19.3200.0009

Accessory for surface mounting or hanging Domino 1200X300



Features

Luminaires suitable for Armstrong ceilings, plaster or surfaces. With highly efficient LED sources. Body made of steel sheet, with PMMA opal diffuser. Suitable for public spaces, offices, conference rooms, classrooms. *Accessories (consult).



Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.


Body: Aluminum / steel sheet

Diffuser:

(1) Micro-prismatic

(2) PLX (PMMA opal)

Installation: Ceiling / Recessed / Suspended / Surface



Lm	K	UGR	Diff.		Code
2793	3000	<19	(1)	85°	19.3054.0001
2957	4000	<19	(1)	85°	19.3054.0003
2695	3000	-	(2)	115°	19.3054.0010
2853	4000	-	(2)	115°	19.3054.0018



Lm	K	UGR	Diff.		Code
2793	3000	<19	(1)	85°	19.3054.0005
2957	4000	<19	(1)	85°	19.3054.0007
2695	3000	-	(2)	115°	19.3054.0014
2853	4000	-	(2)	115°	19.3054.0016



Lm	K	UGR	Diff.		Code
3895	3000	<19	(1)	85°	19.3054.0019
4124	4000	<19	(1)	85°	19.3054.0020
3757	3000	-	(2)	115°	19.3054.0023
3979	4000	-	(2)	115°	19.3054.0024



Lm	K	UGR	Diff.		Code
3895	3000	<19	(2)	85°	19.3054.0021
4124	4000	<19	(2)	85°	19.3054.0022
3979	4000	-	(1)	115°	19.3054.0025



Lm	K	UGR	Diff.		Code
4976	3000	<19	(1)	85°	19.3054.0026
5268	4000	<19	(1)	85°	19.3054.0036
4800	3000	-	(2)	115°	19.3054.0037
5082	4000	-	(2)	115°	19.3054.0046



Lm	K	UGR	Diff.		Code
4976	3000	<19	(1)	85°	19.3054.0032
5268	4000	<19	(1)	85°	19.3054.0034
4800	3000	-	(2)	115°	19.3054.0042
5082	4000	-	(2)	115°	19.3054.0044



Lm	K	UGR	Diff.		Code
4976	3000	<19	(1)	85°	19.3054.0030
5268	4000	<19	(1)	85°	19.3054.0031
5082	4000	-	(2)	115°	19.3054.0041

Panel




IP20

IP44

80000h

L80B10



20 W

ON/
OFF

Lm	K	UGR	Diff.		Code
2793	3000	<19	(1)	90°	19.3054.0002
2957	4000	<19	(1)	90°	19.3054.0004
2695	3000	-	(2)	115°	19.3054.0011
2853	4000	-	(2)	115°	19.3054.0013

20 W



Lm	K	UGR	Diff.		Code
2793	3000	<19	(1)	90°	19.3054.0006
2957	4000	<19	(1)	90°	19.3054.0008
2695	3000	-	(2)	115°	19.3054.0015
2853	4000	-	(2)	115°	19.3054.0017

38 W

ON/
OFF

Lm	K	UGR	Diff.		Code
4976	3000	<19	(1)	90°	19.3054.0027
5268	4000	<19	(1)	90°	19.3054.0029
4800	3000	-	(2)	115°	19.3054.0038
5082	4000	-	(2)	115°	19.3054.0040

38 W



Lm	K	UGR	Diff.		Code
4976	3000	<19	(1)	90°	19.3054.0033
5268	4000	<19	(1)	90°	19.3054.0035
4800	3000	-	(2)	115°	19.3054.0043
5082	4000	-	(2)	115°	19.3054.0045



Babyliss Paris. Warsaw, Poland





Features

Agat / Agat Compact

Luminaires suitable for Armstrong ceilings with 25mm grille and highly efficient LED sources. Body made of steel sheet, powder coated. Available with diffusers PLX or Micro-PRM.

Agat Deco Smooth

Luminaires suitable for Armstrong ceilings, plaster or surfaces. With highly efficient LED sources. Body made of steel sheet, powder coated. Its main feature is the diffuser, recessed with respect to ceiling.



Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.

Body: Steel sheet

Diffuser:

(1) Micro-prismatic


(2) PLX (PMMA opal)

Installation: Ceiling / Recessed

Also available on other typology_page 266

Agat

IP20	100000h
IP44	L80B10




17 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
2300	4000	<19	(1)	90°	19.3038.0603
2243	4000	-	(2)	105°	19.3038.0601



28 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
3761	4000	<19	(1)	90°	19.3038.0616
3668	4000	-	(2)	105°	19.3038.0618



26 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
3450	4000	<19	(1)	90°	19.3038.0147
3365	4000	-	(2)	105°	19.3038.0153



34 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
4600	4000	<19	(1)	90°	19.3038.0103
4487	4000	-	(2)	105°	19.3038.0101

42 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
5642	4000	<19	(1)	90°	19.3038.0183
5503	4000	-	(2)	105°	19.3038.0187

43 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
5751	4000	<19	(1)	90°	19.3038.0176
5609	4000	-	(2)	105°	19.3038.0180

56 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
7523	4000	<19	(1)	90°	19.3038.0131
7337	4000	-	(2)	105°	19.3038.0129

70 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
9404	4000	<19	(1)	90°	19.3038.0139
9171	4000	-	(2)	105°	19.3038.0143

Agat


Recessed Luminaires

Indoor

LUXIONA troll

Agat

IP20	100000h
IP44	L80B10




34 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
4600	4000	<19	(1)	90°	19.3038.0303
4487	4000	-	(2)	105°	19.3038.0301

56 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
7523	4000	<19	(1)	90°	19.3038.0311
7337	4000	-	(2)	105°	19.3038.0309



68 W	ON/ OFF
---------	------------

Lm	K	UGR	Diff.		Code
9201	4000	<19	(1)	90°	19.3038.0505
8974	4000	-	(2)	105°	19.3038.0501

83 W	ON/ OFF
---------	------------


Lm	K	UGR	Diff.		Code
11284	4000	<19	(1)	90°	19.3038.0513
11006	4000	-	(2)	105°	19.3038.0509

111 W	ON/ OFF
----------	------------

Lm	K	UGR	Diff.		Code
15046	4000	<19	(1)	90°	19.3038.0521
14675	4000	-	(2)	105°	19.3038.0517

Agat Compact

IP20	50000h
IP44	L80B10





27 W	ON/OFF
------	--------

Lm	K	UGR	Diff.		Code
3089	4000	-	(2)	105°	19.3038.0196

Recessed Luminaires

Agat Deco Smooth

IP 20	60000h
	L90B10



35 W	ON/OFF
------	--------

Lm	K	UGR	Diff.		Code
4539	4000	<19	(1)	90°	19.3039.2003
4005	4000		(2)	105°	19.3039.2001

51 W	ON/OFF
------	--------

Lm	K	UGR	Diff.		Code
6358	4000	<19	(1)	90°	19.3039.1003
5610	4000		(2)	105°	19.3039.1001

Indoor

LUXIONA troll

Accessories

Agat Deco Smoth

2M-X414LKP90
Mounting clips set for plasterboard ceiling







Features

Luminary body made from steel sheet powder coated in white. Luminary adapted to be mounted in 600x600 module ceilings and with adaptive frame in plasterboard ceilings. It is equipped with highly efficient LED sources of the newest lighting generation, with the average durability of 60000 h. Diffuser is made from polymethyl methacrylate with micro prism structure (micro prism part of diffuser is the outer side of the luminary). Luminary resistant to solids, dust, and liquids penetration (IP20).

CE

IP20

IP44

IK

04

LED

CRI

≥80

SDCM

3

DRIVER

INCL.

220

240

V

50

60

Hz

Standard finishes
Add needed finish to complete the product reference.





Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser:
(1) Micro-prismatic
(2) PLX (PMMA opal)

Installation: Ceiling / Recessed

Also available on other typology_page 276

100000h
L80B10



17
W

ON/
OFF

Lm	K	UGR	Diff.		Code
2215	4000	<19	(1)	84-100°	19.3042.0101

28
W

ON/
OFF

Lm	K	UGR	Diff.		Code
3439	3000	<19	(1)	84-100°	19.3042.0104
3622	4000	<19	(1)	84-100°	19.3042.0103

42
W


ON/
OFF

Lm	K	UGR	Diff.		Code
5433	4000	<19	(1)	84-100°	19.3042.0106

50000h
L80B10



TW (Tunable white)



30-32
W




Lm	K	UGR	Diff.		Code
3357-3568	2700-6500	<19	(1)	84-100°	19.3042.0139

45-48
W



Lm	K	UGR	Diff.		Code
5036-5352	2700-6500	<19	(1)	84-100°	19.3042.0140

100000h
L80B10



28
W

ON/
OFF

Lm	K	UGR	Diff.		Code
3439	3000	<19	(1)	84-100°	19.3042.0302
3622	4000	<19	(1)	84-100°	19.3042.0301

56
W

ON/
OFF

Lm	K	UGR	Diff.		Code
6879	3000	<19	(1)	84-100°	19.3042.0305
7244	4000	<19	(2)	84-100°	19.3042.0304



Softlight

Recessed Luminaires

Indoor

LUXIONA troll



Features

Luminaires suitable for Amstrong ceilings, plaster or surfaces. With highly efficient LED sources. Body made of steel sheet, powder coated. Available with PLX diffuser and to be installed on plaster ceilings with frame adapter (additional).

		IP20	IK04
	CRI ≥80	SDCM 3	100000h L80B10

DIVER INCL.	220 240 V	50 60 Hz
----------------------------	--------------------------	-------------------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet / Synthesizer with aluminum radiator
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Recessed

Also available on other typology_page 64

LED personalisation
Check all types of LEDs on guide´s page 23



Lm	K		Code
3021	3000	110°	19.3056.0001
3180	4000	110°	19.3056.0002



Lm	K		Code
3021	3000	110°	19.3056.0003
3180	4000	110°	19.3056.0004



Lm	K		Code
4939	3000	110°	19.3056.0005
5201	4000	110°	19.3056.0006



Lm	K		Code
5201	4000	110°	19.3056.0007



Mercedes Car showroom. Stryków, Poland

222
X-Line Slim

228
X-Line

234
Agat

X-Line Slim

by Luxiona Designers N

X-Line Slim G/K



Features

Luminaire made of aluminium profile. Compared to traditional LED X-Line, the size has been reduced and the structure enclosed in a profile of 48mm, which allows a more elegant aspect of the product. X-Line Slim uses an opaline PC or Micro.PRM diffuser. All this makes it possible to adjust light and create lighting systems, easing the creation of a comfortable view of indoor spaces and their aesthetics. X-Line Slim is designed for built-in installation on ceilings.

CE

IP
40

IK
04

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Anodized Aluminium
Diffuser:
(1) PMMA Micro-PRM (micro-prismatic)
(2) PMMA lens wide + PC raster

Installation: Ceiling / Recessed

Also available on other typology_page 284

LED personalisation
Check all types of LEDs on guide´s page 23

100000h
L80B10



28 W ON/OFF

55x1150

Lm	K	Diff.	▲	Code
3279	3000	(1)	90°	19.3218.0001
3453	4000	(1)	90°	19.3218.0002



34 W ON/OFF


55x1431

Lm	K	Diff.	▲	Code
4100	3000	(1)	90°	19.3218.0006
4316	4000	(1)	90°	19.3218.0007

50000h
L80B10



TW (Tunable white)




32 W 

55x1150

Lm	K	Diff.	▲	Code
3300	2700-6500	(1)	90°	19.3218.0005


100000h
L80B10



26 W 

55x1154

Lm	K	UGR	Diff.	▲	Code
3269	3000	<19	(2)	75°	19.3218.0011
3444	4000	<19	(2)	75°	19.3218.0012



33 W ON/OFF


55x1434

Lm	K	UGR	Diff.	▲	Code
4086	3000	<19	(2)	75°	19.3218.0016
4306	4000	<19	(2)	75°	19.3218.0017

50000h
L80B10



TW (Tunable white)




46 W 

55x1154

Lm	K	UGR	Diff.	▲	Code
5311	2700-6500	<19	(2)	60°	19.3218.0015

X-Line Slim

100000h
L80B10

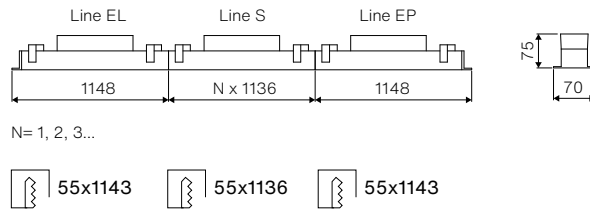

Diffuser: (1) PMMA Micro-PRM (micro-prismatic)

Line EL

28 W ON/OFF

Lm	K		Code
3279	3000	90°	19.3218.0020
3453	4000	90°	19.3218.0023

Line S

28 W ON/OFF


Lm	K		Code
3279	3000	90°	19.3218.0021
3453	4000	90°	19.3218.0024

Line EP

28 W ON/OFF

Lm	K		Code
3279	3000	90°	19.3218.0022
3453	4000	90°	19.3218.0025

50000h
L80B10



32 W



Lm	K		Code
3300	2700-6500	90°	19.3218.0032

32 W





Lm	K		Code
3300	2700-6500	90°	19.3218.0033

32 W



Lm	K		Code
3300	2700-6500	90°	19.3218.0034

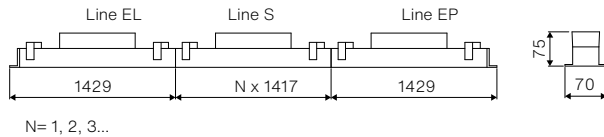

Diffuser: (1) PMMA Micro-PRM (micro-prismatic)

Line EL

35 W ON/OFF

Lm	K		Code
4100	3000	90°	19.3218.0035
4316	4000	90°	19.3218.0038

Line S

35 W ON/OFF


Lm	K		Code
4100	3000	90°	19.3218.0036
4316	4000	90°	19.3218.0039

Line EP

35 W ON/OFF

Lm	K		Code
4100	3000	90°	19.3218.0037
4316	4000	90°	19.3218.0040

50000h
L80B10



39 W



Lm	K		Code
4100	2700-6500	90°	19.3218.0047

39 W




Lm	K		Code
4100	2700-6500	90°	19.3218.0048

39 W



Lm	K		Code
4100	2700-6500	90°	19.3218.0049

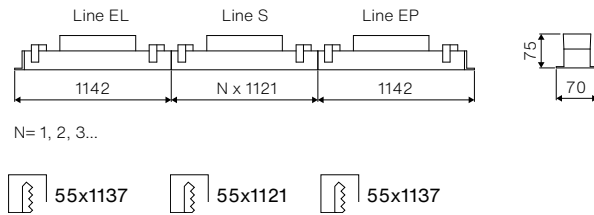100000h
L80B10

Diffuser: (2) PMMA lens wide + PC raster

Line EL

26 W ON/OFF

Lm	K	UGR	▲	Code
3269	3000	<19	75°	19.3218.0050
3444	4000	<19	75°	19.3218.0053

Line S

26 W ON/OFF

Lm	K	UGR	▲	Code
3269	3000	<19	75°	19.3218.0051
3444	4000	<19	75°	19.3218.0054

Line EP

26 W ON/OFF

Lm	K	UGR	▲	Code
3269	3000	<19	75°	19.3218.0052
3444	4000	<19	75°	19.3218.0055

50000h
L80B10

TW (Tunable white)

46 W DALI



Lm	K	UGR	▲	Code
5311	2700-6500	<19	75°	19.3218.0062

46 W DALI

Lm	K	UGR	▲	Code
5311	2700-6500	<19	75°	19.3218.0063

46 W DALI

Lm	K	UGR	▲	Code
5311	2700-6500	<19	75°	19.3218.0064

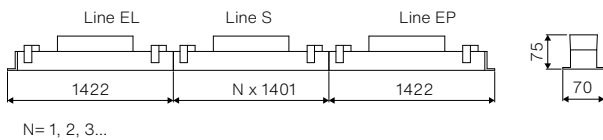

Diffuser: (2) PMMA lens wide + PC raster

Line EL

33 W ON/OFF

Lm	K	UGR	▲	Code
4086	3000	<19	75°	19.3218.0065
4305	4000	<19	75°	19.3218.0068

Line S


33 W ON/OFF

Lm	K	UGR	▲	Code
4086	3000	<19	75°	19.3218.0066
4305	4000	<19	75°	19.3218.0069

Line EP

33 W ON/OFF


Lm	K	UGR	▲	Code
4086	3000	<19	75°	19.3218.0067
4305	4000	<19	75°	19.3218.0070

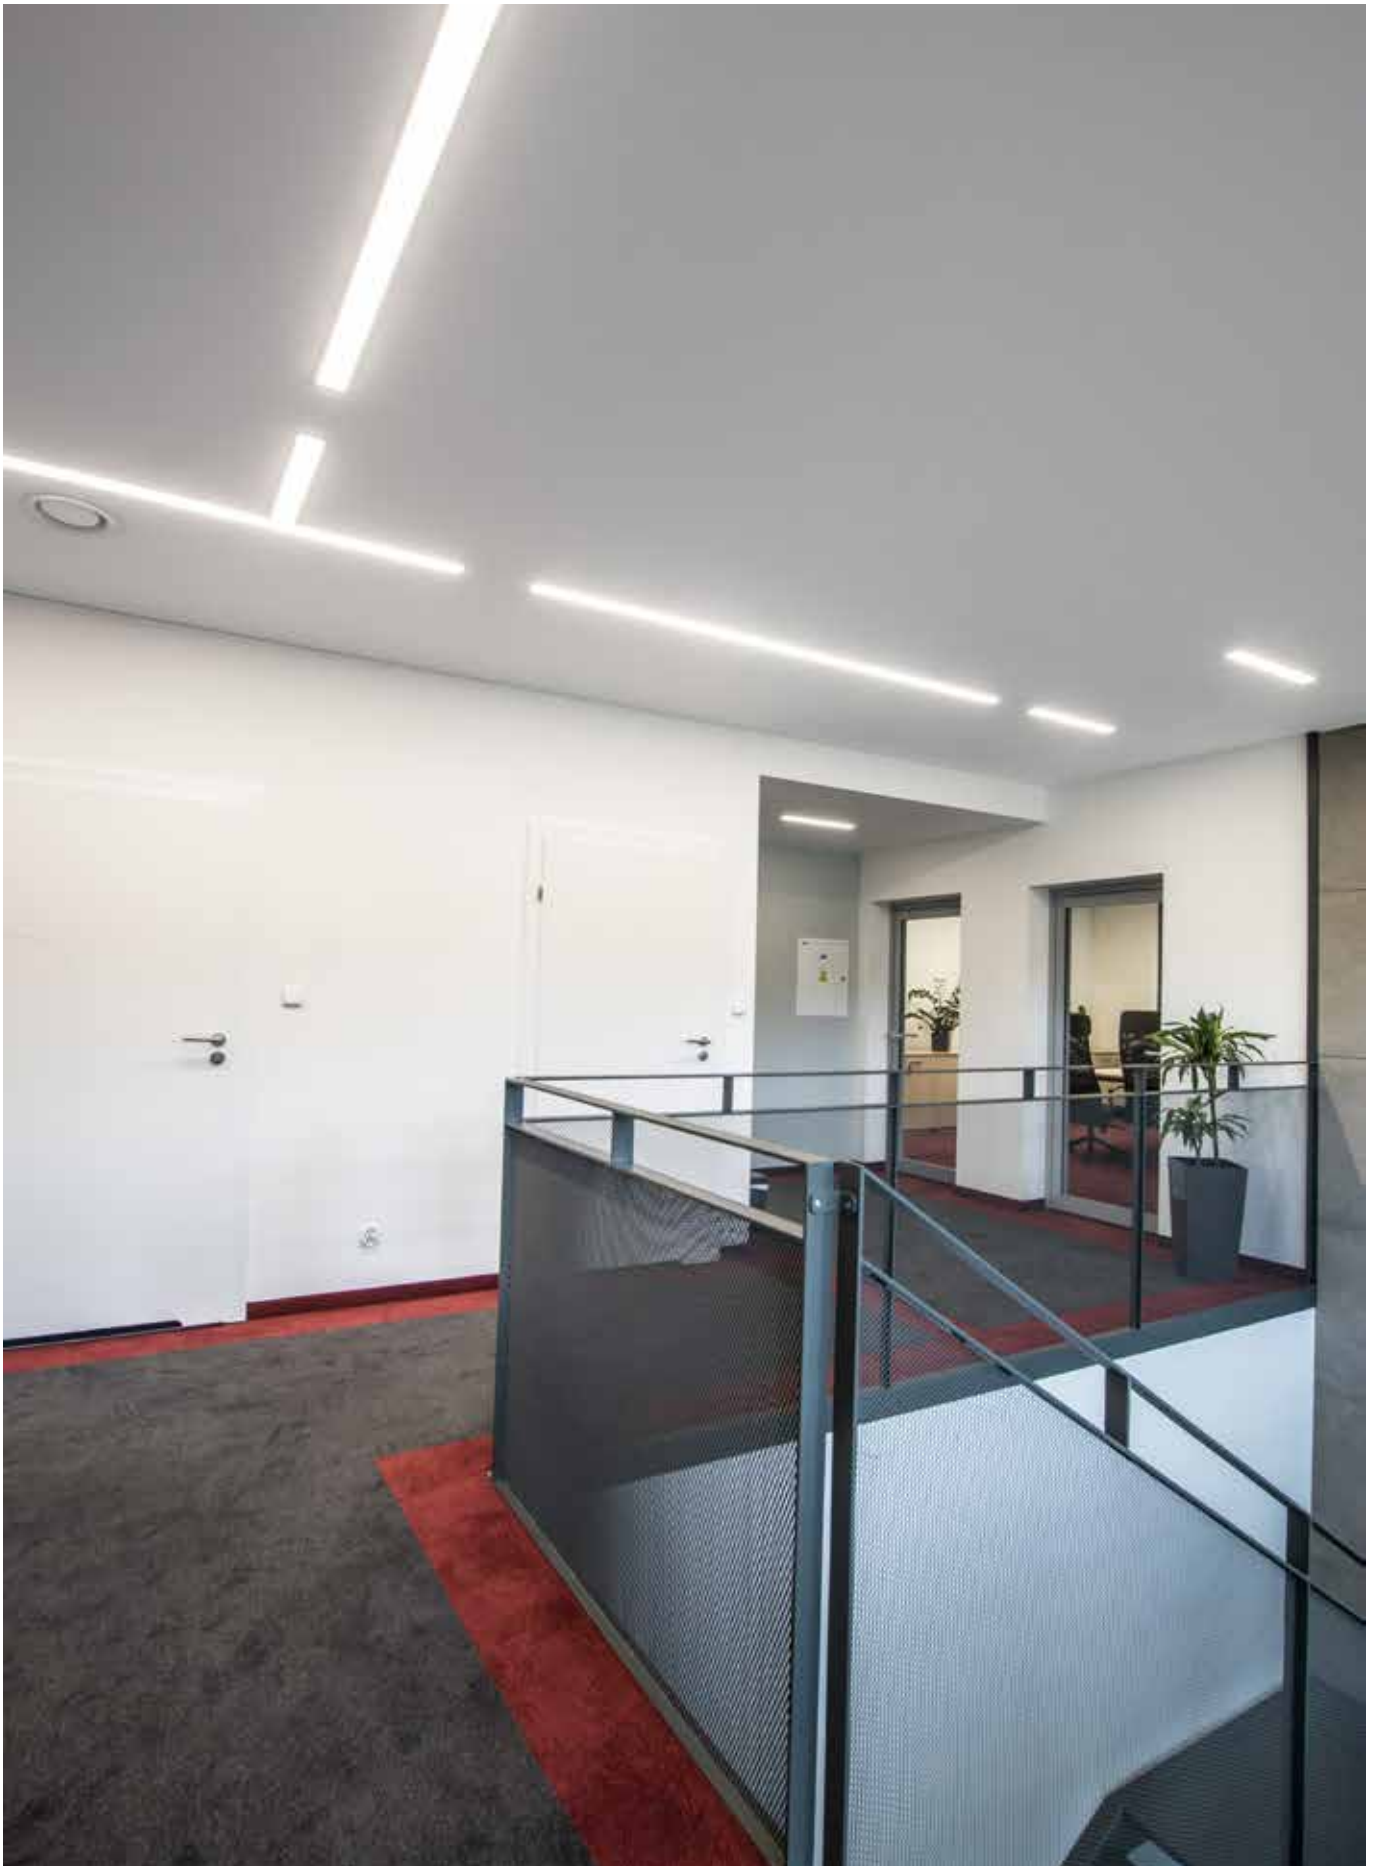

X-line opts for versatile lighting, being its design and production conceived to manage light and to create different lighting systems that focus on getting a comfortable view indoors. All this without putting up aesthetic appearance. It is made of aluminium profile with an opal or microprismatic diffuser, and its design makes it adjust to a big amount of architectural spaces and create any style a designer or architect could think of.

X-Line

Recessed Linears

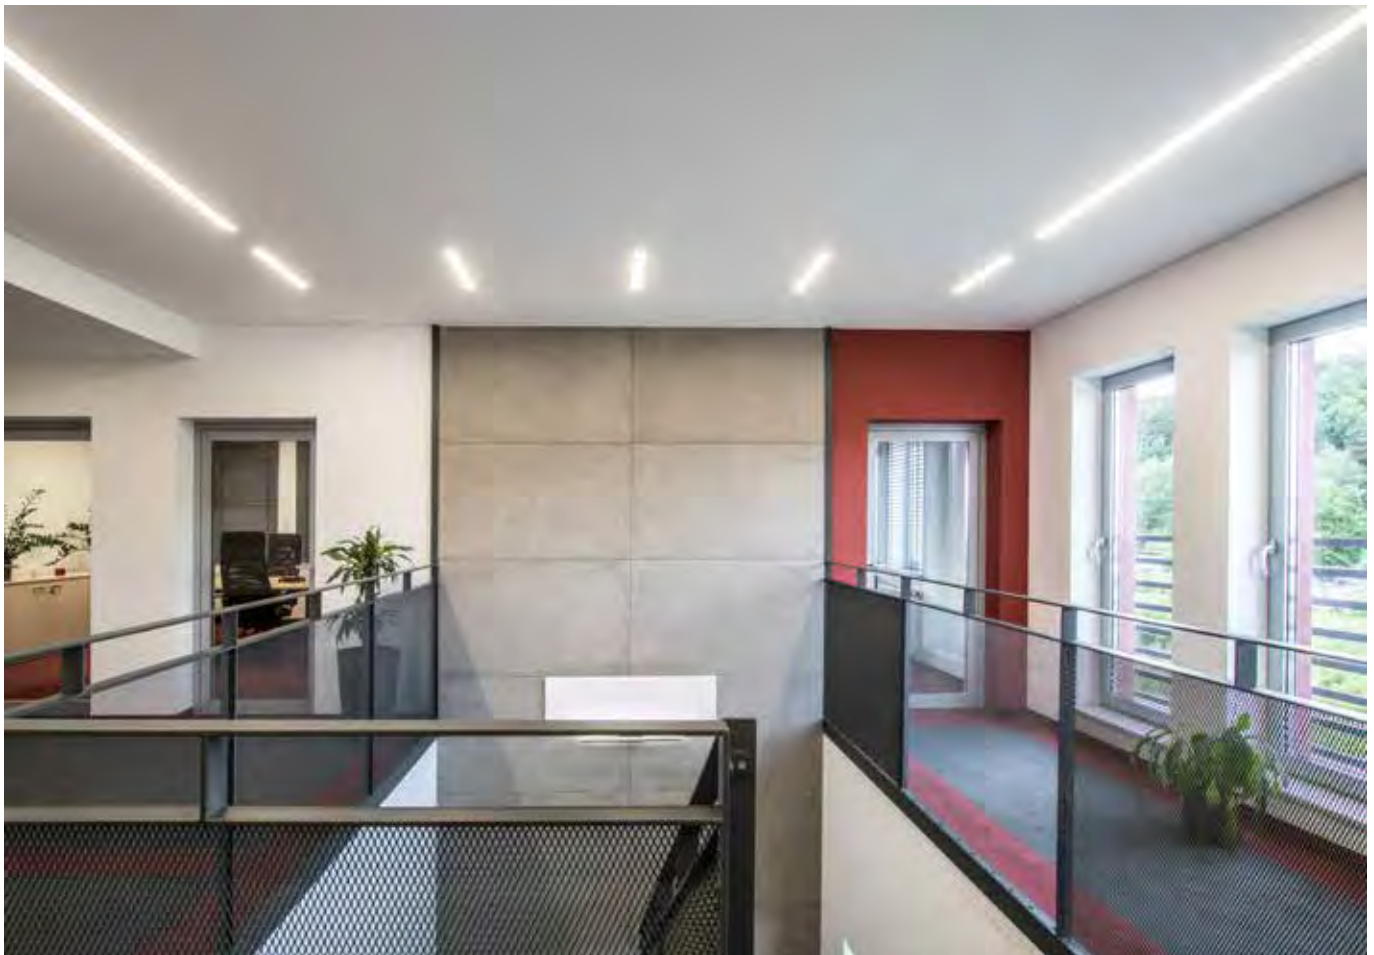

Indoor

LUXIONA troll



Features

The group of X-line luminaires is made of aluminum profile with opal diffuser or micro-prismatic diffuser. The luminaires may be joined with special connectors providing great freedom to arrange elements of the system and its functionality.

CE		IP20 IP44	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes

Add needed finish to complete the product reference.



Otros acabados

Ask us for custom colours.

Body: Aluminium

Diffuser:

- (1) Micro-PRM (micro-prismatic diffuser PMMA)
- (2) PLX (PMMA opal)

Installation: Ceiling / Recessed

Also available on other typology_page 300

LED personalisation

Check all types of LEDs on guide´s page 23





9
W



Lm	K	Diff.	▲	Code
1065	4000	(1)	90°	19.3058.0002
951	4000	(2)	110°	19.3058.0006

14
W

Lm	K	Diff.	▲	Code
1741	4000	(1)	90°	19.3058.0010
1555	4000	(2)	110°	19.3058.0014





17
W



Lm	K	Diff.	▲	Code
2130	4000	(1)	90°	19.3058.0018
1902	4000	(2)	110°	19.3058.0022

28
W

Lm	K	Diff.	▲	Code
3483	4000	(1)	90°	19.3058.0042
3111	4000	(2)	110°	19.3058.0046





21
W



Lm	K	Diff.	▲	Code
2662	4000	(1)	90°	19.3058.0026
2378	4000	(2)	110°	19.3058.0030

35
W

Lm	K	Diff.	▲	Code
4353	4000	(1)	90°	19.3058.0057
3889	4000	(2)	110°	19.3058.0061




26
W




Lm	K	Diff.	▲	Code
3195	4000	(1)	90°	19.3058.0034
2854	4000	(2)	110°	19.3058.0038

42
W

Lm	K	Diff.	▲	Code
5224	4000	(1)	90°	19.3058.0065
4667	4000	(2)	110°	19.3058.0069



X-Line



N= 1, 2, 3...

1696 x 70 (3 elements)

Line EL

9
W

Lm	K	Dif.		Code
1065	4000	(1)	90°	19.3059.0004
951	4000	(2)	110°	19.3059.0016

14
W

Lm	K	Dif.		Code
1741	4000	(1)	90°	19.3059.0027
1555	4000	(2)	110°	19.3059.0039

Line S

9
W

Lm	K	Dif.		Code
1065	4000	(1)	90°	19.3059.0006
951	4000	(2)	110°	19.3059.0018

14
W

Lm	K	Dif.		Code
1741	4000	(1)	90°	19.3059.0029
1555	4000	(2)	110°	19.3059.0041


Line EP

9
W

Lm	K	Dif.		Code
1065	4000	(1)	90°	19.3059.0005
951	4000	(2)	110°	19.3059.0017

14
W

Lm	K	Dif.		Code
1741	4000	(1)	90°	19.3059.0028
1555	4000	(2)	110°	19.3059.0040



N= 1, 2, 3...

3376 x 70 (3 elements)

Line EL

17
W

Lm	K	Dif.		Code
2130	4000	(1)	90°	19.3059.0051
1902	4000	(2)	110°	19.3059.0061

28
W

Lm	K	Dif.		Code
3483	4000	(1)	90°	19.3059.0121
3111	4000	(2)	110°	19.3059.0133

Line S

17
W

Lm	K	Dif.		Code
2130	4000	(1)	90°	19.3059.0053
1902	4000	(2)	110°	19.3059.0063

28
W

Lm	K	Dif.		Code
3483	4000	(1)	90°	19.3059.0123
3111	4000	(2)	110°	19.3059.0135



Line EP

17
W

Lm	K	Dif.		Code
2130	4000	(1)	90°	19.3059.0052
1902	4000	(2)	110°	19.3059.0062

28
W

Lm	K	Dif.		Code
3483	4000	(1)	90°	19.3059.0122
3111	4000	(2)	110°	19.3059.0134



N= 1, 2, 3...

2814/4226 x 70 (3 elements)

Line EL

21
W

Lm	K	Dif.		Code
2662	4000	(1)	90°	19.3059.0073
2378	4000	(2)	110°	19.3059.0085

35
W

Lm	K	Dif.		Code
4353	4000	(1)	90°	19.3059.0169
3889	4000	(2)	110°	19.3059.0181

Line S

21
W

Lm	K	Dif.		Code
2662	4000	(1)	90°	19.3059.0075
2378	4000	(2)	110°	19.3059.0087

35
W

Lm	K	Dif.		Code
4353	4000	(1)	90°	19.3059.0171
3889	4000	(2)	110°	19.3059.0183


Line EP

21
W

Lm	K	Dif.		Code
2662	4000	(1)	90°	19.3059.0074
2378	4000	(2)	110°	19.3059.0086

35
W

Lm	K	Dif.		Code
4353	4000	(1)	90°	19.3059.0170
3889	4000	(2)	110°	19.3059.0182



N= 1, 2, 3...

3374/5056 x 70 (3 elements)

Line EL

26
W

Lm	K	Dif.		Code
3195	4000	(1)	90°	19.3059.0097
2854	4000	(2)	110°	19.3059.0109

42
W

Lm	K	Dif.		Code
5224	4000	(1)	90°	19.3059.0193
4667	4000	(2)	110°	19.3059.0205

Line S

26
W

Lm	K	Dif.		Code
3195	4000	(1)	90°	19.3059.0099
2854	4000	(2)	110°	19.3059.0111

42
W

Lm	K	Dif.		Code
5224	4000	(1)	90°	19.3059.0195
4667	4000	(2)	110°	19.3059.0207




Line EP

26
W

Lm	K	Dif.		Code
3195	4000	(1)	90°	19.3059.0098
2854	4000	(2)	110°	19.3059.0110

42
W

Lm	K	Dif.		Code
5224	4000	(1)	90°	19.3059.0194
4667	4000	(2)	110°	19.3059.0206



Diffuser: (1) Micro-PRM (micro-prismatic diffuser PMMA)

13
W

Lm	K	UGR	▲	Connector	Code
1597	4000	-	90°	TYPE-LC	19.3060.0005
1597	4000	-	90°	TYPE-LD	19.3060.0006
1597	4000	-	90°	TYPE-LE	19.3060.0007
1597	4000	-	90°	TYPE-LF	19.3060.0008

21
W

Lm	K	UGR	▲	Connector	Code
2612	4000	-	90°	TYPE-LC	19.3060.0053
2612	4000	-	90°	TYPE-LD	19.3060.0054
2612	4000	-	90°	TYPE-LE	19.3060.0055
2612	4000	-	90°	TYPE-LF	19.3060.0056




Diffuser: (2) PLX (PMMA opal)

13
W

Lm	K	UGR	▲	Connector	Code
1427	4000	-	110°	TYPE-LC	19.3060.0021
1427	4000	-	110°	TYPE-LD	19.3060.0022
1427	4000	-	110°	TYPE-LE	19.3060.0023
1427	4000	-	110°	TYPE-LF	19.3060.0024

21
W

Lm	K	UGR	▲	Connector	Code
2333	4000	-	110°	TYPE-LC	19.3060.0069
2333	4000	-	110°	TYPE-LD	19.3060.0070
2333	4000	-	110°	TYPE-LE	19.3060.0071
2333	4000	-	110°	TYPE-LF	19.3060.0072



Diffuser: (1) Micro-PRM (micro-prismatic diffuser PMMA)

17
W

Lm	K	UGR	▲	Connector	Code
2130	4000	<19	90°	TYPE-LA	19.3060.0035
2130	4000	<19	90°	TYPE-LB	19.3060.0036

28
W

Lm	K	UGR	▲	Connector	Code
3483	4000	-	90°	TYPE-LA	19.3060.0083
3483	4000	-	90°	TYPE-LB	19.3060.0084


Diffuser: (2) PLX (PMMA opal)

15
W

Lm	K	UGR	▲	Connector	Code
1902	4000	-	110°	TYPE-LA	19.3060.0043
1902	4000	-	110°	TYPE-LB	19.3060.0044

28
W

Lm	K	UGR	▲	Connector	Code
3111	4000	-	110°	TYPE-LA	19.3060.0091
3111	4000	-	110°	TYPE-LB	19.3060.0092



 1126/598 x 70

Diffuser: (1) Micro-PRM (micro-prismatic diffuser PMMA)

26
W

Lm	K	UGR		Connector	Code
3195	4000	-	90°	TYPE-TA	19.3061.0004
3195	4000	-	90°	TYPE-TB	19.3061.0005
3195	4000	-	90°	TYPE-TC	19.3061.0006

42
W

Lm	K	UGR		Connector	Code
5224	4000	-	90°	TYPE-TA	19.3061.0028
5224	4000	-	90°	TYPE-TB	19.3061.0029
5224	4000	-	90°	TYPE-TC	19.3061.0030


Diffuser: (2) PLX (PMMA opal)

26
W

Lm	K	UGR		Connector	Code
2854	4000	-	110°	TYPE-TA	19.3061.0016
2854	4000	-	110°	TYPE-TB	19.3061.0017
2854	4000	-	110°	TYPE-TC	19.3061.0018

42
W

Lm	K	UGR		Connector	Code
4667	4000	-	110°	TYPE-TA	19.3061.0040
4667	4000	-	110°	TYPE-TB	19.3061.0041
4667	4000	-	110°	TYPE-TC	19.3061.0042



 1126/1126 x 70

Diffuser: (1) Micro-PRM (micro-prismatic diffuser PMMA)

34
W

Lm	K	UGR		Connector	Code
4260	4000	-	90°	TYPE-X	19.3062.0002

56
W

Lm	K	UGR		Connector	Code
6966	4000	-	90°	TYPE-X	19.3062.0010

Diffuser: (2) PLX (PMMA opal)

34
W

Lm	K	UGR		Connector	Code
3805	4000	-	110°	TYPE-X	19.3062.0006

56
W

Lm	K	UGR		Connector	Code
6222	4000	-	110°	TYPE-X	19.3062.0014



Features

Luminary made from powder coated steel sheet, finish in white. The product may be equipped with PMMA opal diffuser, or micro prism diffuser. Luminary dedicated for module ceilings, recommended to be used in public sectors such as offices, or conference rooms.

CE

IP
20

IK
04

LED

CRI
≥80

SDCM
3

DIVER
INCL.

220
240 V

50
60 Hz

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Recessed

Agat Slim

100000h
L80B10




17
W

Lm	K		Code
2023	3000	110°	19.3043.0110
2130	4000	110°	19.3043.0109

28
W

Lm	K		Code
3307	3000	110°	19.3043.0124
3483	4000	110°	19.3043.0123




34
W

Lm	K		Code
4047	3000	110°	19.3043.0212
4260	4000	110°	19.3043.0211


Agat Slim Compact

50000h
L80B10



27
W

Lm	K		Code
3088	4000	105°	19.3043.0133



27
W

Lm	K		Code
3089	4000	105°	19.3043.0219

Agat

Recessed Linears

Indoor

LUXIONA troll

238
Downled

242
Beryl

262
Alda

240
Pipe

256
Tubular



Features

Downlight made of die-cast aluminium. High quality primary reflectors made of aluminized polycarbonate. Downlight set up latest CoB LED generation and set up electronic driver built-in. Luminaire can be tilted 80° and rotate 365°.

CE		IP 20	 850°	 80°	 355°
LED	CRI ≥80	SDCM 3	50000h L70B10		


DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium

Installation: Ceiling / Surface



11
W

Lm	K		Code
845	2700	12°	11.2965.1211
922	3000	12°	11.2965.1311
1004	4000	12°	11.2965.1411
845	2700	24°	11.2965.1221
922	3000	24°	11.2965.1321
1004	4000	24°	11.2965.1421
845	2700	36°	11.2965.1231
922	3000	36°	11.2965.1331
1004	4000	36°	11.2965.1431



20
W

Lm	K		Code
1705	2700	12°	11.2965.2211
1858	3000	12°	11.2965.2311
2025	4000	12°	11.2965.2411
1705	2700	24°	11.2965.2221
1858	3000	24°	11.2965.2321
2025	4000	24°	11.2965.2421
1705	2700	36°	11.2965.2231
1858	3000	36°	11.2965.2331
2025	4000	36°	11.2965.2431

Pipe by Luxiona Designers



Features

Luminaire body built in extruded aluminum.
The optical system mounts high-efficiency reflectors with different beam opening angles and state-of-the-art LEDs.

		IP 20	 850°
	CRI ≥90	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Extruded aluminium.

Installation: Ceiling / Surface


Also available on other typology_page 152

LED personalisation
Check all types of LEDs on guide´s page 23




9
W

Lm	K		Code
719	3000	12°	11.1803.1311
727	3000	24°	11.1803.1321
725	3000	36°	11.1803.1331
710	3000	60°	11.1803.1341
790	4000	12°	11.1803.1411
799	4000	24°	11.1803.1421
797	4000	36°	11.1803.1431
780	4000	60°	11.1803.1441



27
W


Lm	K		Code
2709	3000	12°	11.1803.2311
2709	3000	24°	11.1803.2321
2730	3000	36°	11.1803.2331
2721	3000	60°	11.1803.2341
2825	4000	12°	11.1803.2411
2825	4000	24°	11.1803.2421
2853	4000	36°	11.1803.2431
2828	4000	60°	11.1803.2441



36
W

Lm	K		Code
3185	3000	12°	11.1803.3311
3358	3000	24°	11.1803.3321
3224	3000	36°	11.1803.3331
3151	3000	60°	11.1803.3341
3381	4000	12°	11.1803.3411
3464	4000	24°	11.1803.3421
3335	4000	36°	11.1803.3431
3275	4000	60°	11.1803.3441

Beryl

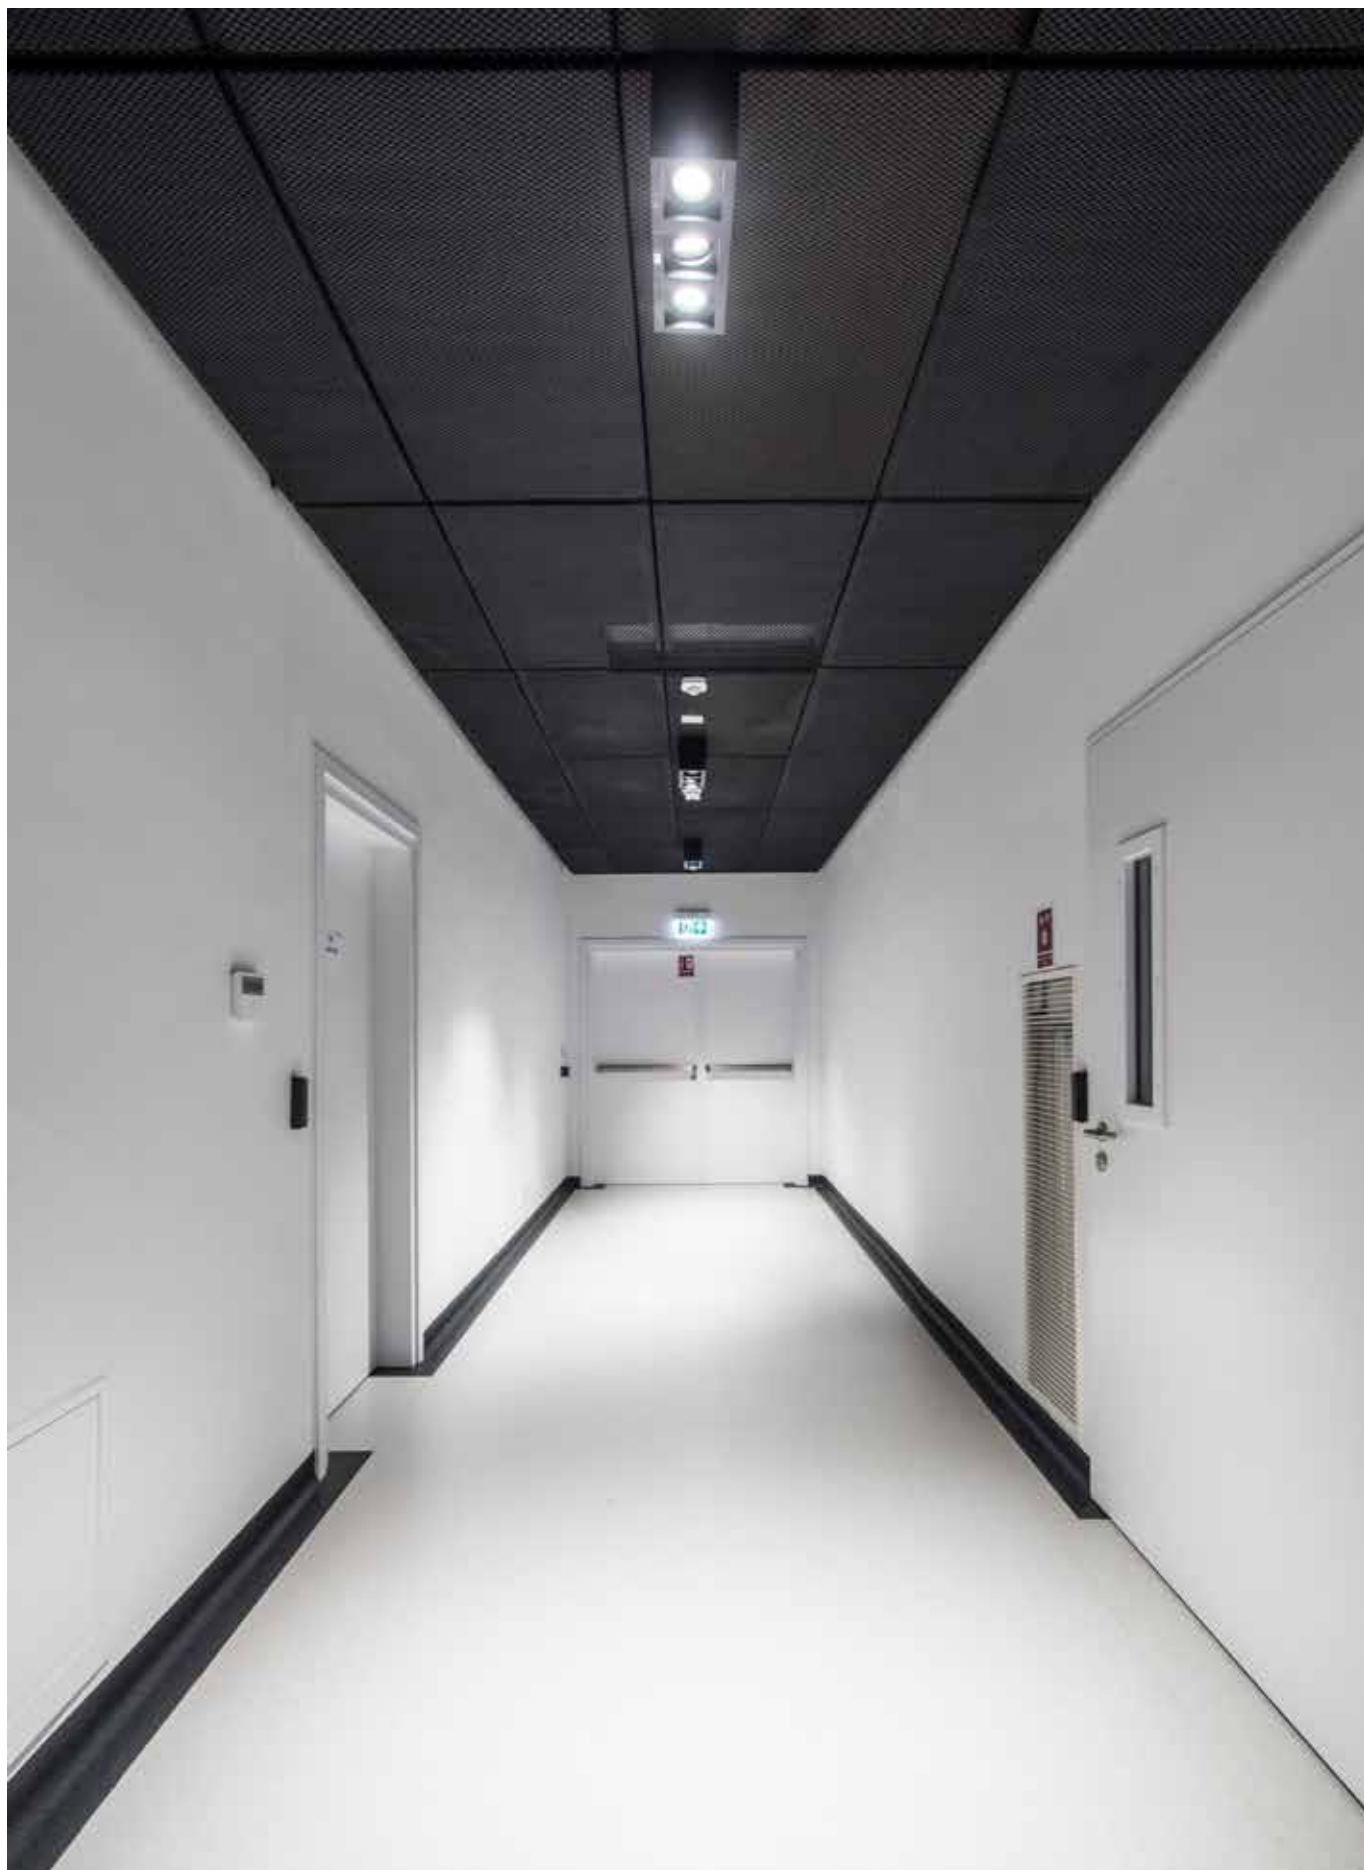

Over time, human beings are increasingly aware of both the effect our actions have on the environment and the importance of taking as much care of what surrounds us as possible. Beryl is a solution that perfectly fits in with this way of thinking, as the efficient lighting it offers adjusts to any type of space while energy usage is minimum. Both the print it leaves on the environment and its weight for our comfort are hardly noticeable, giving room to atmospheres with great visual ease for its users. Having a fashionable and practical design, it is perfect to light up spaces where architecture and aesthetics are key elements, such as hotels, banks or high-level offices.

Beryl



Surface & Suspended Downlights

Indoor

LUXIONA troll

Beryl N New O 
Beryl N New K
Beryl NO
Beryl NK



Features

Surface mounted luminaires with aluminium casting.
Suitable for ceilings without the possibility of recessing
and equipped with state-of-the-art LED technology.





IK

04



CRI

≥80

SDCM

2

DRIVER

INCL.

220

240 V

50

60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Aluminium
Diffuser:
(1) = Transparent glass
(2) = Transparent PMMA
(3) = PLX (PMMA opal)
(4) = Micro-PRM (micro-prismatic diffuser PMMA)
(5) = SHM (hardened mat glass)

Installation: Ceiling / Surface


Also available on other typology_page 156

LED personalisation
Check all types of LEDs on guide´s page 23


IP 20	83000h L90B10
----------	------------------




14
W



Lm	K	Diffuser		Code
1416	4000	(4)	90°	19.3078.0018
1192	4000	(3)	85°	19.3078.0021
1304	4000	(2)	40°	19.3078.0014



20
W



Lm	K	Diffuser		Code
2105	4000	(4)	70°	19.3078.0026
1964	4000	(3)	100°	19.3078.0028
2385	4000	(1)	75°	19.3078.0024

27
W

Lm	K	Diffuser		Code
2930	4000	(4)	110°	19.3078.0031
2734	4000	(3)	100°	19.3078.0034
3320	4000	(5)	75°	19.3078.0037



Beryl N New O

Beryl N New K

Beryl NO

Beryl NK

IP	83000h
20	L90B10




20
W

Lm	K	Diffuser		Code
2357	4000	(4)	70°	19.3078.0043
2161	4000	(3)	95°	19.3078.0047
2414	4000	(1)	75°	19.3078.0039

27
W

Lm	K	Diffuser		Code
3281	4000	(4)	70°	19.3078.0055
3008	4000	(3)	95°	19.3078.0058
3360	4000	(1)	75°	19.3078.0051

IP	83000h
44	L90B10





8
W

Lm	K	Diffuser		Code
762	4000	(4)	70°	19.3079.0006
641	4000	(3)	85°	19.3079.0010
702	4000	(2)	40°	19.3079.0002

14
W


Lm	K	Diffuser		Code
1416	4000	(4)	90°	19.3079.0014
1192	4000	(3)	85°	19.3079.0016
1304	4000	(2)	40°	19.3079.0013

IP 44	83000h L90B10
----------	------------------




20
W

Lm	K	Diffuser		Code
1964	4000	(3)	100°	19.3079.0018
2385	4000	(1)	75°	19.3079.0017



27
W

Lm	K	Diffuser		Code
2930	4000	(4)	70°	19.3079.0021
2734	4000	(3)	100°	19.3079.0023
3320	4000	(5)	75°	19.3079.0024
3320	4000	(1)	75°	19.3079.0020




27
W

Lm	K	Diffuser		Code
3281	4000	(4)	70°	19.3079.0042
3008	4000	(3)	95°	19.3079.0046
3360	4000	(1)	75°	19.3079.0038




IP 44	83000h L90B10
----------	------------------



20
W

Lm	K	Diffuser		Code
2357	4000	(4)	70°	19.3079.0030
2161	4000	(3)	95°	19.3079.0034
2414	4000	(1)	75°	19.3079.0026



41
W

Lm	K	Diffuser		Code
4757	4000	(3)	95°	19.3079.0051
5189	4000	(5)	75°	19.3079.0052

Beryl N New O
Beryl N New K 
Beryl NO
Beryl NK



Features

Downlight surface mounted luminaire made of die-cast aluminium. Luminaire is aimed at prestigious interiors such as hotels, banks and high level offices. Owing to the application of newest components and renowned producers of LEDs, it was possible to build such luminaires which save energy consumption (5) comparing with traditional solutions. The luminaire has the ability to adjust the optics in two planes (in the vertical axis by 359° and to the left and right 15°). Note: the color of the frame and housing has a slightly different shade than the color of the inner reflector cover.





IP20

IP44

IK

04



LED

CRI

≥80

SDCM

2

DRIVER

INCL.

220

240

V

50

60

Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.





Other finishes
Ask us for custom colours.



Body: Aluminium
Diffuser:
(1) = Transparent glass
(2) = Transparent PMMA
(3) = PLX (PMMA opal)
(4) = Micro-PRM (micro-prismatic diffuser PMMA)

Installation: Ceiling / Surface

Also available on other typology_page 156


LED personalisation
Check all types of LEDs on guide´s page 23

83000h
L90B10




14
W

Lm	K	Diffuser		Code
1383	4000	(4)	60°	19.3074.0006
1164	4000	(3)	85°	19.3074.0010
1274	4000	(2)	45°	19.3074.0002




29
W

Lm	K	Diffuser		Code
2766	4000	(4)	60°	19.3075.0006
2329	4000	(3)	85°	19.3075.0010
2548	4000	(2)	45°	19.3075.0002




43
W

Lm	K	Diffuser		Code
4149	4000	(4)	60°	19.3076.0006
3494	4000	(3)	85°	19.3076.0010
3822	4000	(2)	45°	19.3076.0002



54
W

Lm	K	Diffuser		Code
5532	4000	(4)	60°	19.3077.0006
4659	4000	(3)	85°	19.3077.0010
5096	4000	(2)	45°	19.3077.0002





54
W

Lm	K	Diffuser		Code
5532	4000	(4)	60°	19.3080.0006
4659	4000	(3)	85°	19.3080.0010
5096	4000	(2)	45°	19.3080.0002



Beryl N New O
Beryl N New K ^N
Beryl NO
Beryl NK

84000h
L90B10





27
W

Lm	K	Diffuser		Code
2930	4000	(4)	60°	19.3074.0018
2734	4000	(3)	85°	19.3074.0022
3320	4000	(1)	45°	19.3074.0014





54
W

Lm	K	Diffuser		Code
5812	4000	(4)	60°	19.3075.0018
5425	4000	(3)	85°	19.3075.0022
6587	4000	(1)	45°	19.3075.0014





81
W

Lm	K	Diffuser		Code
8718	4000	(4)	60°	19.3076.0018
8137	4000	(3)	85°	19.3076.0022
9881	4000	(1)	45°	19.3076.0014



108
W

Lm	K	Diffuser		Code
11625	4000	(4)	60°	19.3077.0018
10850	4000	(3)	85°	19.3077.0022
13175	4000	(1)	45°	19.3077.0014



108
W

Lm	K	Diffuser		Code
11625	4000	(4)	60°	19.3080.0018
10850	4000	(3)	85°	19.3080.0022
13175	4000	(1)	45°	19.3080.0014



Beryl N New O
Beryl N New K
Beryl NO 
Beryl NK



Features

Surface mounted luminary of downlight type which is built from powder coated steel sheet with white finish. Indicated for installations without false ceilings and optimal for general lighting.

		IP 20	IK 06
	CRI ≥80	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Surface

Also available on other typology_page 156

LED personalisation
Check all types of LEDs on guide´s page 23



10
W

Lm	K		Code
1170	3000	80°	19.3073.0001
1170	4000	80°	19.3073.0002


16
W

Lm	K		Code
1710	3000	80°	19.3073.0003
1820	4000	80°	19.3073.0004

21
W

Lm	K		Code
2176	3000	80°	19.3073.0005
2316	4000	80°	19.3073.0006

Beryl N New O
Beryl N New K
Beryl NO
Beryl NK 

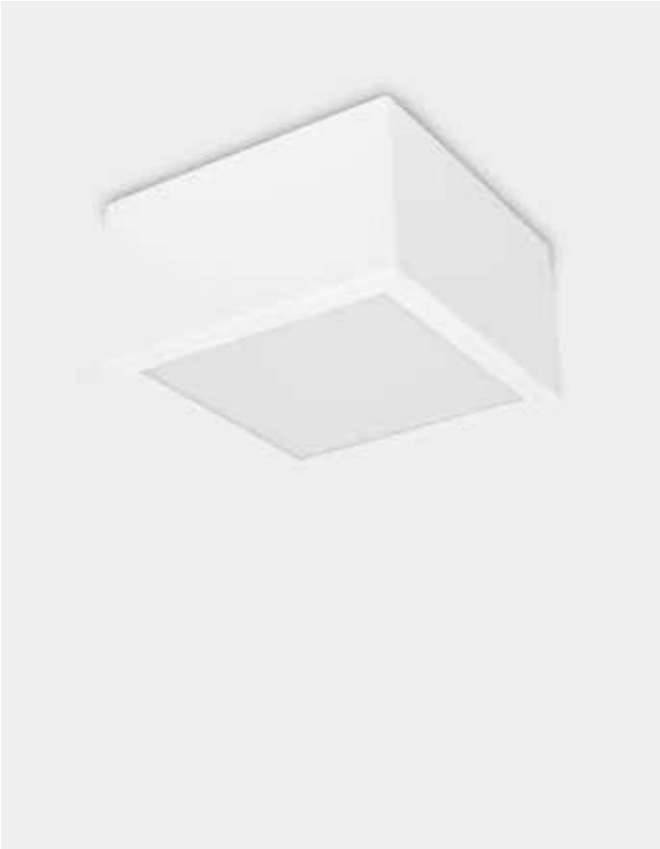

Features

Surface mounted luminary of downlight type which is built from powder coated steel sheet with white finish. Indicated for installations without false ceilings and optimal for general lighting.

		IP 20	IK 06
	CRI ≥80	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Surface

Also available on other typology_page 156

LED personalisation
Check all types of LEDs on guide´s page 23



10
W

Lm	K		Code
1170	4000	80°	19.3072.0002

16
W

Lm	K		Code
1710	3000	80°	19.3072.0003
1820	4000	80°	19.3072.0004

21
W

Lm	K		Code
2176	3000	80°	19.3072.0005
2316	4000	80°	19.3072.0006

Tubular by Luxiona Designers



A cylinder's pureness is what inspires the creation of a family of suspended luminaires for general lighting. Tubular may light up a great variety of spaces, such as retail stores, homes, restaurants, hotels and many others where aesthetics is a relevant element.

Tubular



Surface & Suspended Downlights

Indoor

LUXIONA troll

Tubular



Features

Body made of extruded aluminum, with a micro-perforated plate disc on the upper part. A 3 meter suspension cable included. Three different sizes according to Power.



Consult for dimming options.

Standard finishes

Add needed finish to complete the product reference.

Outside

.02

.04

.25

.63

Inside

Black

Only GU10

Body: Extruded aluminium

Other finishes

Inside

Orange

Gold

Ask us for custom colours.


Installation: Ceiling / Suspended

LED personalisation

Check all types of LEDs on guide´s page 23



Incandescent or LED equivalent

15W
max. N


Lamp Holder	Code
GU 10	11.1645.0100

CRI
≥90SDCM
360000h
L80B108
W

Lm	K	Beam Angle	Code
803	2700	12°	11.1645.2211
803	2700	24°	11.1645.2221
828	3000	12°	11.1645.2311
828	3000	24°	11.1645.2321
907	4000	12°	11.1645.2411
907	4000	24°	11.1645.2421

15
W

Lm	K	Beam Angle	Code
1286	2700	12°	11.1645.5211
1286	2700	24°	11.1645.5221
1286	2700	36°	11.1645.5231
1317	3000	12°	11.1645.5311
1317	3000	24°	11.1645.5321
1317	3000	36°	11.1645.5331
1459	4000	12°	11.1645.5411
1459	4000	24°	11.1645.5421
1459	4000	36°	11.1645.5431


20
W

Lm	K	Beam Angle	Code
1890	2700	12°	11.2645.2211
1890	2700	24°	11.2645.2221
1890	2700	36°	11.2645.2231
1956	3000	12°	11.2645.2311
1956	3000	24°	11.2645.2321
1956	3000	36°	11.2645.2331
2120	4000	12°	11.2645.2411
2120	4000	24°	11.2645.2421
2120	4000	36°	11.2645.2431

29
W

Lm	K	Beam Angle	Code
2457	2700	12°	11.2645.5211
2457	2700	24°	11.2645.5221
2457	2700	36°	11.2645.5231
2553	3000	12°	11.2645.5311
2553	3000	24°	11.2645.5321
2553	3000	36°	11.2645.5331
2750	4000	12°	11.2645.5411
2750	4000	24°	11.2645.5421
2750	4000	36°	11.2645.5431

Tubular



29
W


Lm	K		Code
2457	2700	12°	11.3645.2211
2457	2700	24°	11.3645.2221
2457	2700	36°	11.3645.2231
2457	2700	60°	11.3645.2241
2553	3000	12°	11.3645.2311
2553	3000	24°	11.3645.2321
2553	3000	36°	11.3645.2331
2553	3000	60°	11.3645.2341
2750	4000	12°	11.3645.2411
2750	4000	24°	11.3645.2421
2750	4000	36°	11.3645.2431
2750	4000	60°	11.3645.2441

42
W

Lm	K		Code
3565	2700	12°	11.3645.5211
3565	2700	24°	11.3645.5221
3565	2700	36°	11.3645.5231
3565	2700	60°	11.3645.5241
3676	3000	12°	11.3645.5311
3676	3000	24°	11.3645.5321
3676	3000	36°	11.3645.5331
3676	3000	60°	11.3645.5341
3980	4000	12°	11.3645.5411
3980	4000	24°	11.3645.5421
3980	4000	36°	11.3645.5431
3980	4000	60°	11.3645.5441




Accessories



11.1645.0001
On-Off Surface Base. Wire not included

11.1645.0003
DALI Surface Base. Wire not included



11.1645.0002
On-Off Semi-recessed Base. Wire not included



Crustó Bakery, El Corte Inglés Diagonal, Spain. Picture from Súpernormal Estudio Creativo.

Tubular

Surface & Suspended Downlights

Indoor

LUXIONA troll



Features

Luminaire made by spinning of powder-coated sheet steel.



Light source not included
E27 LED

Standard finishes

Add needed finish to complete the product reference.



Other finishes




Ask us for custom colours.

Body: Aluminium

Installation: Ceiling / Suspended

Alda Industrial




25W
max.

Lamp Holder	Code
E27	11.1912.4031

Alda

Alda Rustic




25W
max.

Lamp Holder	Code
E27	11.1912.3031

Surface & Suspended Downlights

Alda Vintage



25W
max.

Lamp Holder	Code
E27	11.1912.2031

Indoor

266
Rubin Look

276
Softlight

278
Meteor

280
Lotos

Rubin Look

by Luxiona Designers N

Rubin Look
Rubin Look Compact
Rubin Look Smooth IP44
Rubin Look Smooth Compact



Features

Surface mounted luminaire with LED technology. Made of steel sheet, powder coated in white.

CE		IP 40	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.

Body: Steel sheet


Diffuser: PLX (PMMA opal)

Installation: Ceiling / Surface

Also available on other typology_page 208

LED personalisation

Check all types of LEDs on guide's page 23



13
W



Lm	K		Code
1704	4000	105°	19.3095.0001

17
W

Lm	K		Code
2272	4000	105°	19.3095.0004

21
W

Lm	K		Code
2786	4000	105°	19.3095.0007



26
W


Lm	K		Code
3408	4000	105°	19.3095.0009

34
W

Lm	K		Code
4544	4000	105°	19.3095.0014


42
W

Lm	K		Code
5572	4000	105°	19.3095.0015



56
W

Lm	K		Code
7430	4000	105°	19.3095.0017




17
W

Lm	K		Code
2272	4000	105°	19.3095.0005

28
W

Lm	K		Code
3715	4000	105°	19.3095.0011



34
W

Lm	K		Code
4544	4000	105°	19.3095.0013

56
W

Lm	K		Code
7430	4000	105°	19.3095.0016



Accessories

6E1-500KW341P-3
Suspension New Type-A 34 lenght
1,5m cable 3X 1-point

6E1-8670-B-1,5
Suspension New Type-E lenght-1,5
m without cable 1-point

6E1-500KW34K-3Y
Suspension New Type-G+H 34
lenght 1,5m cable 3X set type-Y

Rubin Look
Rubin Look Compact
Rubin Look Smooth IP44
Rubin Look Smooth Compact



Features

Surface mounted luminaire with LED technology. Made of steel sheet, powder coated in white.

CE

IP
40

IK
04

LED

CRI
≥80

SDCM
3

50000h
L80B10

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Surface



Also available on other typology_page 208

LED personalisation
Check all types of LEDs on guide´s page 23




27
W

Lm	K		Code
2964	4000	110°	19.3248.0001



55
W

Lm	K		Code
5929	4000	110°	19.3248.0002



Rubin Look
Rubin Look Compact
Rubin Look Smooth IP44
Rubin Look Smooth Compact



Features

Surface mounted luminaire with LED technology. Made of steel sheet, powder coated in white.

		IP 44	IK 04
	CRI ≥80	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Surface

Also available on other typology_page 208

LED personalisation
Check all types of LEDs on guide´s page 23





19
W

Lm	K		Code
2025	4000	110°	19.3097.0002

29
W

Lm	K		Code
2812	4000	110°	19.3097.0006





34
W

Lm	K		Code
4329	4000	110°	19.3097.0012

58
W

Lm	K		Code
5625	4000	110°	19.3097.0020




36
W

Lm	K		Code
4050	4000	110°	19.3097.0011

58
W

Lm	K		Code
5625	4000	110°	19.3097.0019



Rubin Look
Rubin Look Compact
Rubin Look Smooth IP44
Rubin Look Smooth Compact



Features

Surface mounted luminaire with LED technology. Made of steel sheet, powder coated in white.

CE

IK
04

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Steel sheet
Diffuser:
(1) = PLX (PMMA opal)
(2) = Micro-PRM (micro-prismatic diffuser PMMA)

Installation: Ceiling / Surface

Also available on other typology_page 208

LED personalisation
Check all types of LEDs on guide´s page 23

IP 40	80000h L80B10	Motion Sensor	*
----------	------------------	------------------	---

13
W

Lm	K	UGR	Diffuser		Code
1811	4000	<19	(2)	95°	19.3249.0002
1721	4000	-	(1)	115°	19.3249.0004
1721	4000	-	(1)	115°	19.3249.0006 *



19
W

Lm	K	UGR	Diffuser		Code
2576	4000	<19	(2)	95°	19.3249.0008
2447	4000	-	(1)	115°	19.3249.0010
2447	4000	-	(1)	115°	19.3249.0012 *

28
W



Lm	K	UGR	Diffuser		Code
3577	4000	<19	(2)	95°	19.3249.0014
3398	4000	-	(1)	115°	19.3249.0016
3398	4000	-	(1)	115°	19.3249.0018 *

IP 44	100000h L80B10
----------	-------------------

34
W

Lm	K	UGR	Diffuser		Code
4329	4000	-	(1)	110°	19.3097.0012


IP 44	60000h L80B10
----------	------------------

58
W

Lm	K	UGR	Diffuser		Code
5625	4000	-	(1)	110°	19.3097.0020



Jardin Bemowo residential. Warsaw, Poland

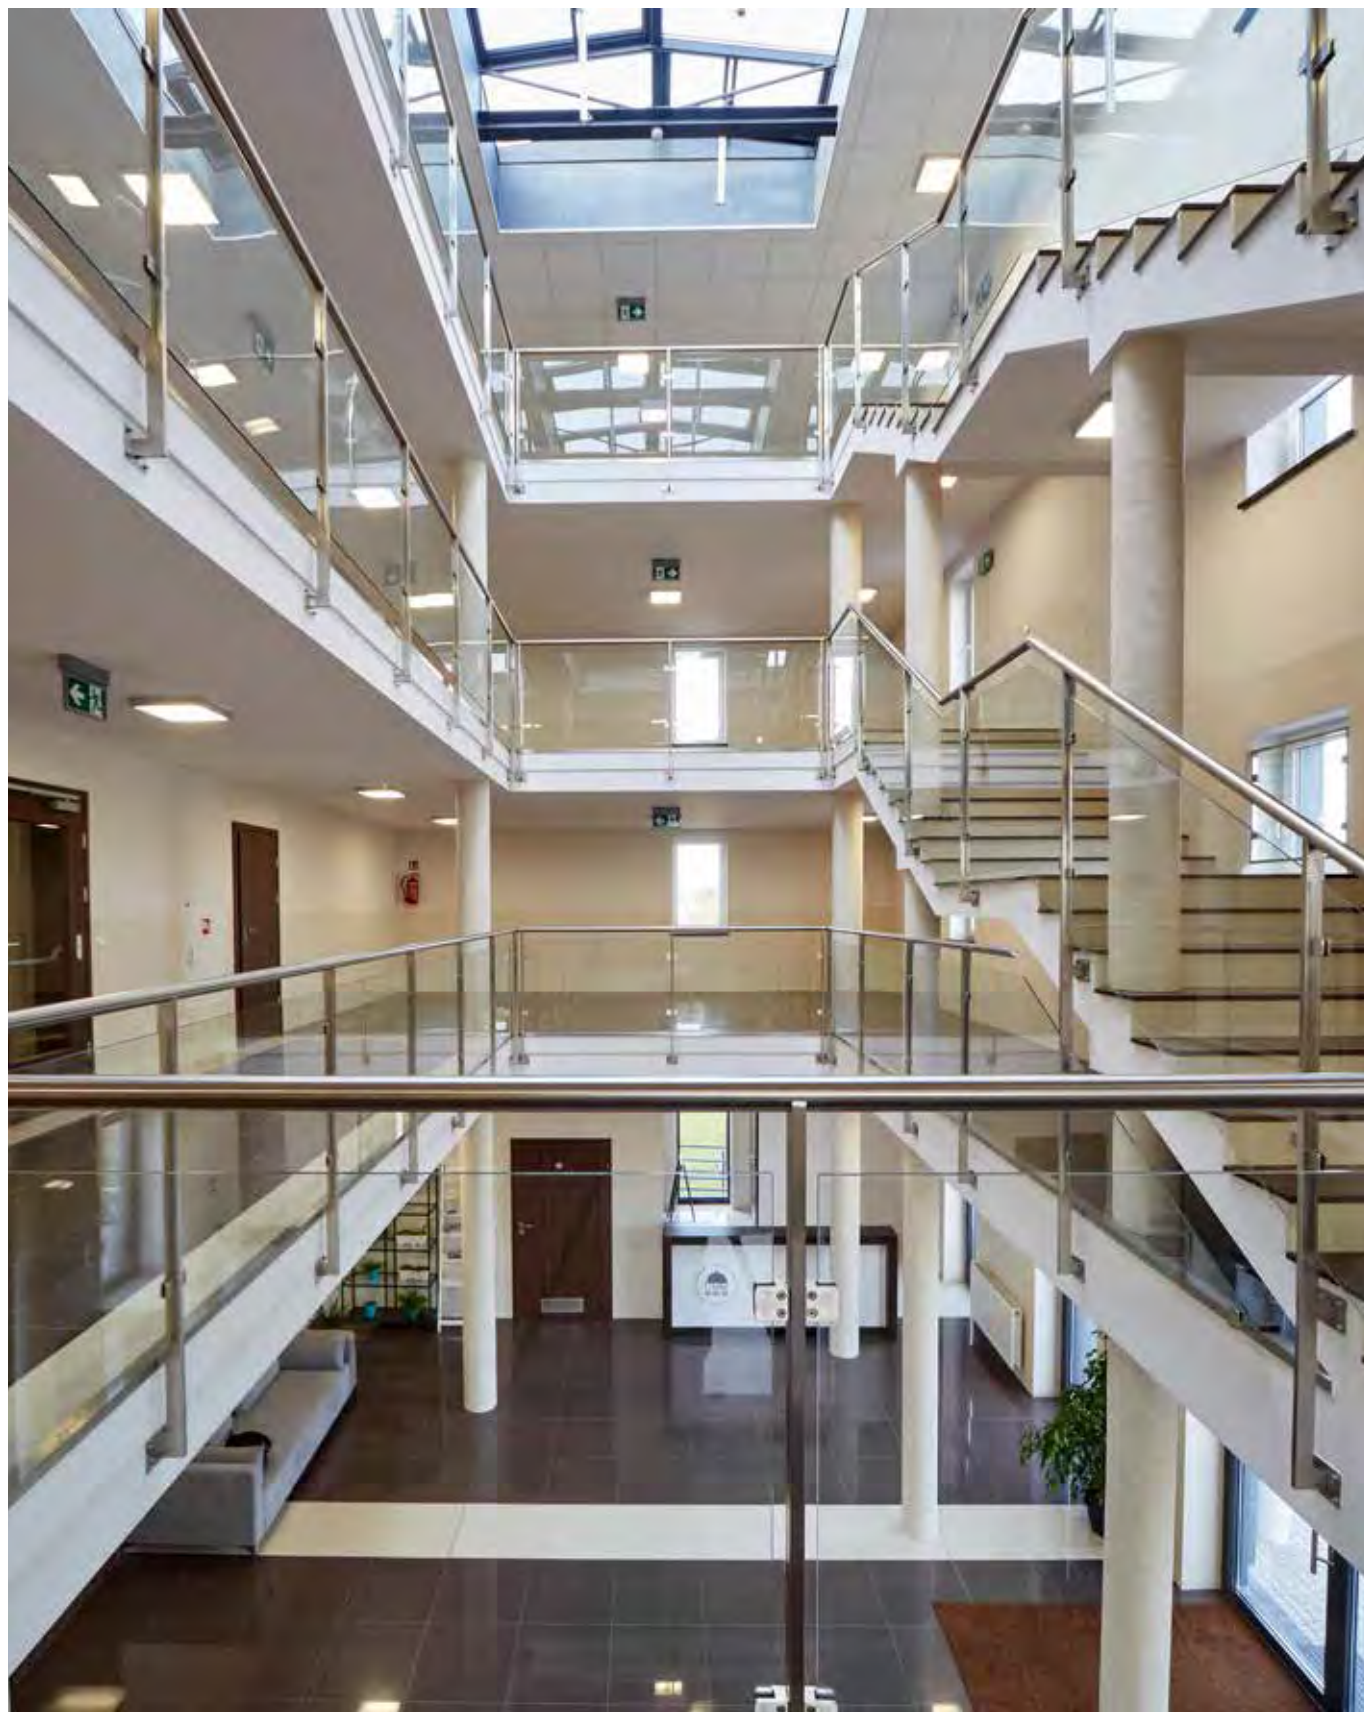

Hotel Czarno na białym. Cracow, Poland



Features

Surface-mounted luminaire made of sheet steel, finished in white with powder paint. Indirect light suitable for offices, conference rooms and public buildings

CE		IP 20	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10
			UGR <19

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.





Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: Micro-PRM (micro-prismatic diffuser PMMA)

Installation: Ceiling / Surface

Also available on other typology_page 214

LED personalisation
Check all types of LEDs on guide´s page 23



17
W

Lm	K		Code
2215	4000	84-100°	19.3099.0002

28
W

Lm	K		Code
3622	4000	84-100°	19.3099.0004

42
W

Lm	K		Code
5433	4000	84-100°	19.3099.0007





Features

Surface-mounted luminaire with high-efficiency LED technology. Made of sheet steel, powder-coated and finished in white. PMMA diffuser.

CE		IP 20	IK 04
LED	CRI ≥80	SDCM 3	50000h L80B10



DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.



Body: Steel sheet
Diffuser: PMMA opal

Installation: Ceiling / Surface



27
W



Lm	K		Code
3007	3000	120°	19.3244.0001
3130	4000	120°	19.3244.0002

39
W

Lm	K		Code
4056	3000	120°	19.3244.0003
4221	4000	120°	19.3244.0004

55
W

Lm	K		Code
6014	3000	120°	19.3244.0006
6260	4000	120°	19.3244.0007



40
W

Lm	K		Code
4636	4000	120°	19.3244.0005



Features

Surface-mounted luminaire for ceiling or wall mounting, equipped with high-efficiency LED technology. Polycarbonate body and diffuser and the possibility of incorporating a motion sensor.

CE		IP 54	IK 06
LED	CRI ≥80	30000h L70B10	


DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: PC
Diffuser: PC (opalescent polycarbonate)

Installation: Wall / Ceiling / Surface




13 W Motion Sensor *

Lm	K	Code
1303	3000	19.3209.0019
1402	4000	19.3209.0020
1303	3000	19.3209.0021 *
1402	4000	19.3209.0022 *



12 W

Lm	K	Code
797	3000	19.3209.0017
857	4000	19.3209.0018




18 W Motion Sensor *

Lm	K	Code
1785	3000	19.3209.0005
1920	4000	19.3209.0006
1785	3000	19.3209.0013 *
1920	4000	19.3209.0014 *

24 W Motion Sensor *

Lm	K	Code
2298	3000	19.3209.0007
2471	4000	19.3209.0008
2298	3000	19.3209.0015 *
2471	4000	19.3209.0016 *



13 W Motion Sensor *

Lm	K	Code
1393	3000	19.3209.0023
1498	4000	19.3209.0024
1393	3000	19.3209.0025 *
1498	4000	19.3209.0026 *

284
X-Line Slim

300
X-Line

312
Shoptline

318
Universal Line

322
Matrix

X-Line Slim by Luxiona Designers N




X-line Slim means a perfect union between minimalism, effectiveness and versatility. With a maximum control of luminance, it adjusts to any architectural space and its multiple usefulness makes it the ideal solution for lighting technicians, architects and technical designers.

X-Line Slim

Surface & Suspended Linears

Indoor

LUXIONA **troll**

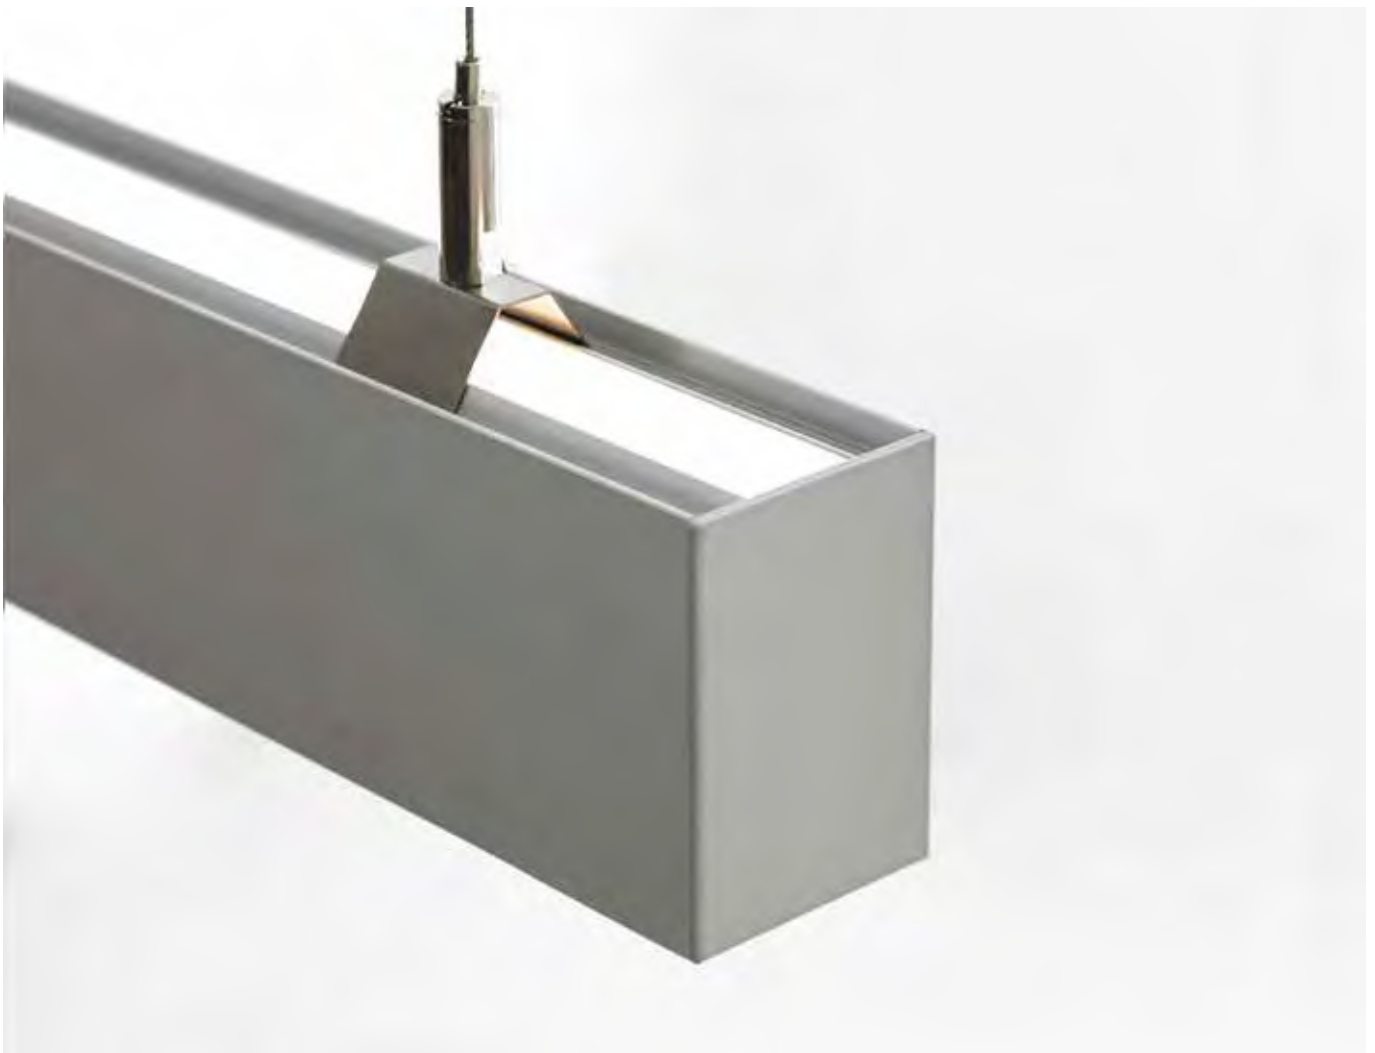



Features

Made of aluminium profile, with smaller size than normal X-Line. It may have a finish with opal diffuser or with Micro-PRM. To be suspended or surface mounted.

CE

IP
40

IK
04

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Aluminium
Diffuser:
(1) Micro-PRM (micro-prismatic diffuser PMMA)
(2) PC (opalescent polycarbonate)
(3) PC lens wide

Installation: Ceiling / Suspended

Also available on other typology_page 222

LED personalisation
Check all types of LEDs on guide´s page 23

100000h
L80B10



17
W

Lm	K	Diffuser	▲	Code
1846	4000	(1)	90°	19.3111.0001
1817	4000	(2)	95°	19.3111.0003

28
W

Lm	K	Diffuser	▲	Code
3018	4000	(1)	90°	19.3111.0009
2972	4000	(2)	95°	19.3111.0011




26
W

Lm	K	Diffuser	▲	Code
2769	4000	(1)	90°	19.3111.0005
2726	4000	(2)	95°	19.3111.0007


42
W

Lm	K	Diffuser	▲	Code
4527	4000	(1)	90°	19.3111.0017
4458	4000	(2)	95°	19.3111.0019



28
W

Lm	K	Diffuser	▲	Code
3375	3000	(3)	90°	19.3219.0001
3554	4000	(3)	90°	19.3219.0002




35
W

Lm	K	Diffuser	▲	Code
4221	3000	(3)	90°	19.3219.0006
4443	4000	(3)	90°	19.3219.0007

50000h
L80B10




TW (Tunable white)



32
W



Lm	K	Diff.	▲	Code
3300	2700-6500	(3)	90°	19.3219.0005



39
W



Lm	K	Diff.	▲	Code
4140	2700-6500	(3)	90°	19.3219.0010

X-Line Slim Surface
X-Line Slim

X-Line Slim Compact
X-Line Slim UD

100000h
L80B10



Line EL Line S Line EP



N= 1, 2, 3...

Line EL

14
W

Lm	K	Diffuser		Code
1509	4000	(1)	90°	19.3112.0001
1486	4000	(2)	95°	19.3112.0004

Line S


14
W

Lm	K	Diffuser		Code
1509	4000	(1)	90°	19.3112.0003
1486	4000	(2)	95°	19.3112.0006

Line EP

14
W

Lm	K	Diffuser		Code
1509	4000	(1)	90°	19.3112.0002
1486	4000	(2)	95°	19.3112.0005



N= 1, 2, 3...

Line EL

28
W

Lm	K	Diffuser		Code
3018	4000	(1)	90°	19.3112.0013
2972	4000	(2)	95°	19.3112.0016

Line S


28
W

Lm	K	Diffuser		Code
3018	4000	(1)	90°	19.3112.0015
2972	4000	(2)	95°	19.3112.0018

Line EP

28
W

Lm	K	Diffuser		Code
3018	4000	(1)	90°	19.3112.0014
2972	4000	(2)	95°	19.3112.0017



N= 1, 2, 3...

Line EL

42
W

Lm	K	Diffuser		Code
4527	4000	(1)	90°	19.3112.0025
4458	4000	(2)	95°	19.3112.0028

Line S


42
W

Lm	K	Diffuser		Code
4527	4000	(1)	90°	19.3112.0027
4458	4000	(2)	95°	19.3112.0030

Line EP

42
W

Lm	K	Diffuser		Code
4527	4000	(1)	90°	19.3112.0026
4458	4000	(2)	95°	19.3112.0029

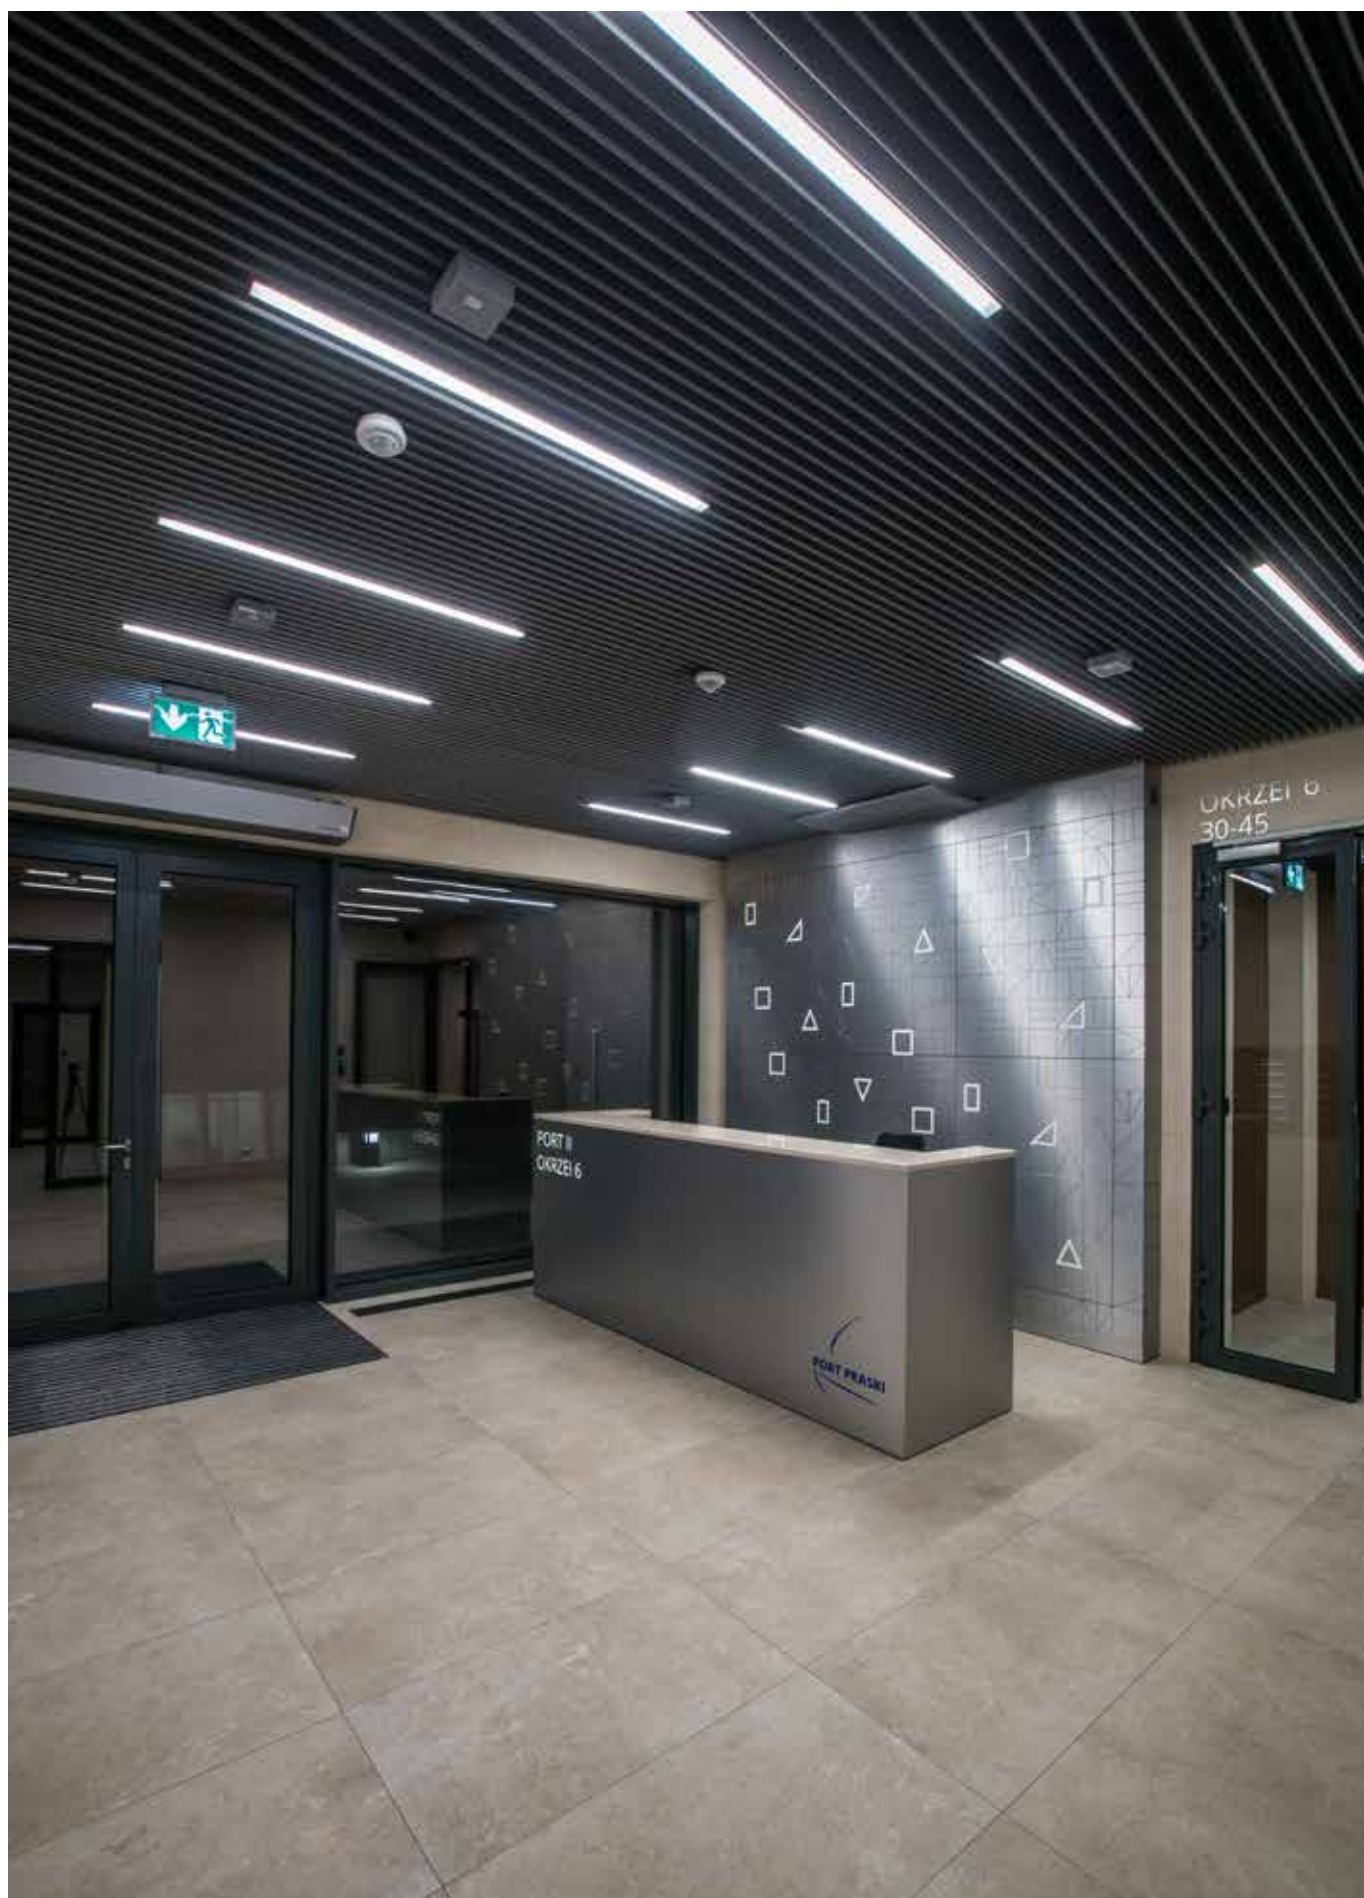



Features

Aluminium profile construction reduces the size of the X-Line compared to the standard X-Line. Choice of opal or Micro-PRM diffuser finish. Suspended installation.

CE

IP
40

IK
04

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.04

.24

.34

Other finishes
Ask us for custom colours.
Ask us for the Raster colours options.


Body: Aluminium
Diffuser:
(1) Micro-PRM (micro-prismatic diffuser PMMA)
(2) PC (opalescent polycarbonate)
(3) PC lens wide
(4) RASTER (anti-glare louver)

Installation: Ceiling / Suspended

Also available on other typology_page 222

LED personalisation
Check all types of LEDs on guide´s page 23

100000h
L80B10




17
W

Lm	K	Diffuser	▲	Code
1846	4000	(1)	90°	19.3107.0001
1817	4000	(2)	95°	19.3107.0003

28
W

Lm	K	Diffuser	▲	Code
3018	4000	(1)	90°	19.3107.0009
2972	4000	(2)	95°	19.3107.0011




26
W

Lm	K	Diffuser	▲	Code
2769	4000	(1)	90°	19.3107.0005
2726	4000	(2)	95°	19.3107.0007

42
W

Lm	K	Diffuser	▲	Code
4527	4000	(1)	90°	19.3107.0017
4458	4000	(2)	95°	19.3107.0019




17
W

Lm	K	Diffuser	▲	Code
2173	4000	(3)	90°	19.3219.0012

28
W

Lm	K	Diffuser	▲	Code
3554	4000	(3)	90°	19.3219.0022



21
W


Lm	K	Diffuser	▲	Code
2717	4000	(3)	90°	19.3219.0017

34
W

Lm	K	Diffuser	▲	Code
4443	4000	(3)	90°	19.3219.0027

50000h
L80B10


 TW (Tunable white)



32
W



Lm	K	Diff.	▲	Code
3300	2700-6500	(3)	90°	19.3219.0025




40
W




Lm	K	Diff.	▲	Code
4125	2700-6500	(3)	90°	19.3219.0030

100000h
L80B10



22
W

Lm	K	UGR	Diffuser		Code
3173	4000	<19	(4)	75°	19.3113.0001




27
W

Lm	K	UGR	Diffuser		Code
3788	4000	<19	(4)	75°	19.3113.0003

100000h
L80B10



Line EL Line S Line EP



N= 1, 2, 3...

Line EL

14
W

Lm	K	Diffuser	▲	Code
1509	4000	(1)	90°	19.3108.0001
1486	4000	(2)	95°	19.3108.0007

Line S

14
W

Lm	K	Diffuser	▲	Code
1509	4000	(1)	90°	19.3108.0003
1486	4000	(2)	95°	19.3108.0009

Line EP


14
W

Lm	K	Diffuser	▲	Code
1509	4000	(1)	90°	19.3108.0002
1486	4000	(2)	95°	19.3108.0008

Line EL

Line S

Line EP

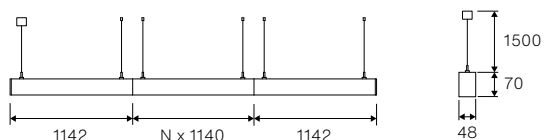

N= 1, 2, 3...

Line EL

28
W

Lm	K	Diffuser	▲	Code
3018	4000	(1)	90°	19.3108.0013
2972	4000	(2)	95°	19.3108.0019

Line S

28
W

Lm	K	Diffuser	▲	Code
3018	4000	(1)	90°	19.3108.0015
2972	4000	(2)	95°	19.3108.0021

Line EP


28
W

Lm	K	Diffuser	▲	Code
3018	4000	(1)	90°	19.3108.0014
2972	4000	(2)	95°	19.3108.0020

Line EL

Line S

Line EP

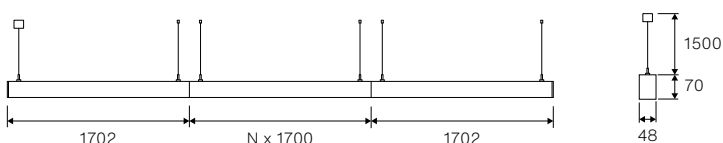

N= 1, 2, 3...

Line EL

42
W

Lm	K	Diffuser	▲	Code
4527	4000	(1)	90°	19.3108.0025
4458	4000	(2)	95°	19.3108.0031

Line S

42
W

Lm	K	Diffuser	▲	Code
4527	4000	(1)	90°	19.3108.0027
4458	4000	(2)	95°	19.3108.0033

Line EP

42
W

Lm	K	Diffuser	▲	Code
4527	4000	(1)	90°	19.3108.0026
4458	4000	(2)	95°	19.3108.0032



Features

Aluminium profile construction reduces the size of the X-Line compared to the standard X-Line. Choice of opal or Micro-PRM diffuser finish. Surface or suspended installation.

CE		IP 40	IK 04
LED	CRI ≥80	SDCM 3	70000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser:
(1) Micro-PRM (micro-prismatic diffuser PMMA)
(2) PC (opallescent polycarbonate)

Installation: Ceiling / Suspended


Also available on other typology_page 222

LED personalisation
Check all types of LEDs on guide´s page 23



26
W

Lm	K	Diff.		Code
2830	4000	(1)	90°	19.3253.0001
2787	4000	(2)	95°	19.3253.0002



26
W

Lm	K	Diff.		Code
2830	4000	(1)	90°	19.3253.0003
2787	4000	(2)	95°	19.3253.0004



Features

Made of aluminium profile, with smaller size than normal X-Line. Its optical modular system allows an excellent adjustment of glare, and it is recommended for premises that need values lower than UGR 19. Available for direct / indirect lighting. Suspended.

Installation: Ceiling / Suspended

CE		IP 40	IK 04
LED	CRI ≥80	SDCM 3	80000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

- (1) Body: Anodized Aluminium
Diffuser: PC opal/PC lens wide
- (2) Body: Aluminium
Diffuser: PC/Micro-PRM (opalescent polycarbonate/micro-prismatic diffuser PMMA) [up/down]
- (3) Body: Aluminium
Diffuser: PC/RASTER (opalescent polycarbonate/anti-glare louver) [up/down]
- (4) Body: Aluminium
Diffuser: PC/PC (opalescent polycarbonate/opalescent polycarbonate) [up/down]

Also available on other typology_page 222

LED personalisation
Check all types of LEDs on guide´s page 23



34W Total		17W Up	17W Down
--------------	--	-----------	-------------


Lm	K	Diffuser		Code
4347	4000	(1)	90°	19.3219.0032

45W Total		17W Up	28W Down
--------------	--	-----------	-------------

Lm	K	Diffuser		Code
5650	4000	(1)	90°	19.3219.0037

40W Total		14W Up	26W Down
--------------	--	-----------	-------------

Lm	K	UGR	Diffuser		Code
5049	4000	<19	(3)	75°	19.3114.0001



42W Total		21W Up	21W Down
--------------	--	-----------	-------------


Lm	K	Diffuser		Code
5434	4000	(1)	90°	19.3219.0042

55W Total		21W Up	34W Down
--------------	--	-----------	-------------

Lm	K	Diffuser		Code
7159	4000	(1)	90°	19.3219.0047

44W Total		18W Up	26W Down
--------------	--	-----------	-------------

Lm	K	Diffuser		Code
5826	4000	(3)	75°	19.3114.0003



42W Total		14W Up	28W Down
--------------	--	-----------	-------------

Lm	K	UGR	Diffuser		Code
4667	4000	-	(2)	90°	19.3109.0001

56W Total		28W Up	28W Down
--------------	--	-----------	-------------

Lm	K	UGR	Diffuser		Code
6222	4000	-	(2)	90°	19.3109.0005

X-Line Slim Surface
X-Line Slim




X-Line Slim Compact
X-Line Slim UD



				63W Total 21W Up 42W Down		84W Total 42W Up 42W Down					
Lm	K	UGR	Diffuser		Code	Lm	K	UGR	Diffuser		Code
7000	4000	-	(2)	90°	19.3109.0003	9334	4000	-	(2)	90°	19.3109.0009



Line EL Line S Line EP



N= 1, 2, 3...

Line EL



Lm	K	Diff.	▲	Code
1902	4000	(2) 90°		19.3110.0001
1902	4000	(4) 36-96°		19.3110.0007

Line S



Lm	K	Diff.	▲	Code
1902	4000	(2) 90°		19.3110.0003
1902	4000	(4) 36-96°		19.3110.0009

Line EP




Lm	K	Diff.	▲	Code
1902	4000	(2) 90°		19.3110.0002
1902	4000	(4) 36-96°		19.3110.0008

Line EL

Line S

Line EP

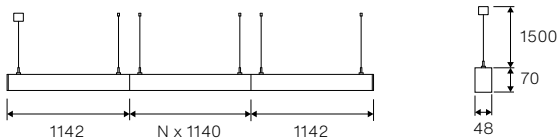

N= 1, 2, 3...

Line EL



Lm	K	Diff.	▲	Code
3805	4000	(2) 90°		19.3110.0013
3805	4000	(4) 36-96°		19.3110.0019

Line S



Lm	K	Diff.	▲	Code
3805	4000	(2) 90°		19.3110.0015
3805	4000	(4) 36-96°		19.3110.0021

Line EP




Lm	K	Diff.	▲	Code
3805	4000	(2) 90°		19.3110.0014
3805	4000	(4) 36-96°		19.3110.0020

Line EL

Line S

Line EP

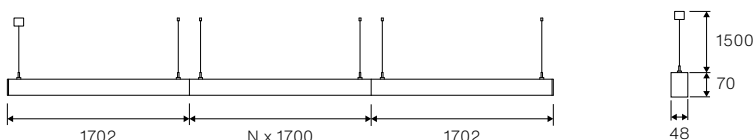

N= 1, 2, 3...

Line EL



Lm	K	Diff.	▲	Code
5708	4000	(2) 90°		19.3110.0025
5708	4000	(4) 36-96°		19.3110.0031

Line S



Lm	K	Diff.	▲	Code
5708	4000	(2) 90°		19.3110.0027
5708	4000	(4) 36-96°		19.3110.0033

Line EP



Lm	K	Diff.	▲	Code
5708	4000	(2) 90°		19.3110.0026
5708	4000	(4) 36-96°		19.3110.0032



X-line opts for versatile lighting, being its design and production conceived to manage light and to create different lighting systems that focus on getting a comfortable view indoors. All this without putting up aesthetic appearance. It is made of aluminium profile with an opal or microprismatic diffuser, and its design makes it adjust to a big amount of architectural spaces and create any style a designer or architect could think of.

X-Line

Surface & Suspended Linears



Indoor

LUXIONA troll

X-Line

X-Line
X-Line Compact
Snake



Features

X-Line luminaires are made of aluminium profile that may include an opal or microprismatic diffuser. They may be joined to special connectors that allow to arrange the system elements and their functionality freely.

CE

IK
04

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser:
(1) Micro-PRM (micro-prismatic diffuser PMMA)
(2) PLX (PMMA opal)

Installation: Ceiling / Suspended

Also available on other typology_page 226

LED personalisation
Check all types of LEDs on guide´s page 23

X-Line

IP 44	100000h L80B10
----------	-------------------



Lm	K	Diff.		Code
1065	4000	(1)	90°	19.3102.0002
951	4000	(2)	110°	19.3102.0006




Lm	K	Diff.		Code
1741	4000	(1)	90°	19.3102.0010
1555	4000	(2)	110°	19.3102.0014




Lm	K	Diff.		Code
2130	4000	(1)	90°	19.3102.0017
1902	4000	(2)	110°	19.3102.0022



Lm	K	Diff.		Code
3483	4000	(1)	90°	19.3102.0043
3111	4000	(2)	110°	19.3102.0046




Lm	K	Diff.		Code
3889	4000	(2)	110°	19.3102.0064



Lm	K	Diff.		Code
3195	4000	(1)	90°	19.3102.0036
2854	4000	(2)	110°	19.3102.0038



Lm	K	Diff.		Code
5224	4000	(1)	90°	19.3102.0074
4667	4000	(2)	110°	19.3102.0079



Lm	K	UGR	Diff.		Code
5325	4000	<19	(1)	90°	19.3102.0068
4757	4000	-	(2)	110°	19.3102.0071

X-Line

Surface & Suspended Linears


Indoor

LUXIONA troll


X-Line

X-Line

IP 44	50000h L80B10	TW (Tunable white)
----------	------------------	--------------------



Lm	K	Diff.		Code
3228-3431	2700-6500	(1)	90°	19.3102.0049
2884-3065	2700-6500	(2)	110°	19.3102.0050



Lm	K	Diff.		Code
6456-6861	2700-6500	(1)	90°	19.3102.0090
5767-6129	2700-6500	(2)	110°	19.3102.0091

Accessories

Code	Description
6E1-3001-3-1,6M	Suspension 3001-3 length-1,6 m (1-point)
6E1-3001-3-1,6M3	Suspension 3001-3 length-1,6 m (1-point with wire 3x)
6E1-500KWANK-3	Suspension New Type-A+B 24 lenght 1,5m cable 3X set
6E1-500KWB24K-3	Suspension New Type-A+E 24 lenght 1,5m cable 3X set
6E1-600XLN1P	X-Line suspension 24 length 1,6m without wire 1-point
6E1-600XLN1P-3	X-Line suspension 24 length 1,6m wire 3x 1-point
6E1-600XLN1P-3BL	X-Line suspension 04 length 1,6m wire 3x 1-point
6E1-600XLN1P-3W	X-Line suspension 34 length 1,6m wire 3x 1-point
6E1-600XLN1P-BL	X-Line suspension 04 length 1,6m no wire 1-point
6E1-600XLN1PW	X-Line suspension 34 length 1,6m without wire 1-point
6E1-600XLN-3	X-Line suspension 24 length 1,6m wire 3x set
6E1-600XLN-3BLK	X-Line suspension 04 length 1,6m wire 3x set
6E1-600XLN-3W	X-Line suspension 34 length 1,6m wire 3x set
6E1-7104-1-1,6M3	Suspension 7104-1 length-1,6 m (1-point with wire 3x)
6E1-7104-2-1,6M	Suspension 7104-2 length-1,6 m (1-point)
6E1-8670-B-1,5	Suspension New Type-E lenght-1,5 m without cable 1-point
6E1-8670-B-1,5-3X	Suspension New Type-F lenght-1,5 m cable 3X 1-point



X-Line

Surface & Suspended Linears



Indoor


LUXIONA troll

Codewise Start Up. Cracow, Poland

X-Line

X-Line

IP	100000h
44	L80B10



Line EL

9
W

Lm	K	Dif.	▲	Code
1065	4000	(1)	90°	19.3103.0003
951	4000	(2)	110°	19.3103.0015

14
W

Lm	K	Dif.	▲	Code
1741	4000	(1)	90°	19.3103.0027
1555	4000	(2)	110°	19.3103.0039

Line S

9
W

Lm	K	Dif.	▲	Code
1065	4000	(1)	90°	19.3103.0005
951	4000	(2)	110°	19.3103.0017

14
W

Lm	K	Dif.	▲	Code
1741	4000	(1)	90°	19.3103.0029
1555	4000	(2)	110°	19.3103.0041


Line EP

9
W

Lm	K	Dif.	▲	Code
1065	4000	(1)	90°	19.3103.0004
951	4000	(2)	110°	19.3103.0016

14
W

Lm	K	Dif.	▲	Code
1741	4000	(1)	90°	19.3103.0028
1555	4000	(2)	110°	19.3103.0040



N= 1, 2, 3...

Line EL

17
W

Lm	K	Dif.	▲	Code
2130	4000	(1)	90°	19.3103.0051
1902	4000	(2)	110°	19.3103.0063

28
W

Lm	K	Dif.	▲	Code
3483	4000	(1)	90°	19.3103.0120
3111	4000	(2)	110°	19.3103.0135

Line S

17
W

Lm	K	Dif.	▲	Code
2130	4000	(1)	90°	19.3103.0053
1902	4000	(2)	110°	19.3103.0065

28
W

Lm	Dif.	Dif.	▲	Code
3483	(1)	(1)	90°	19.3103.0122
3111	4000	(2)	110°	19.3103.0137

Line EP

17
W


Lm	K	Dif.	▲	Code
2130	4000	(1)	90°	19.3103.0052
1902	4000	(2)	110°	19.3103.0064

28
W

Lm	K	Dif.	▲	Code
3483	4000	(1)	90°	19.3103.0121
3111	4000	(2)	110°	19.3103.0136

X-Line

IP 44	100000h L80B10
----------	-------------------

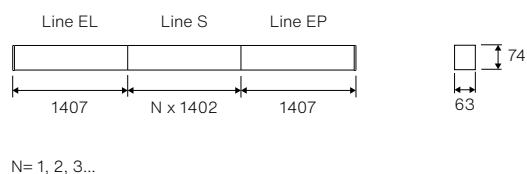

Line EL

21
W

Lm	K	Dif.		Code
2662	4000	(1)	90°	19.3103.0075
2378	4000	(2)	110°	19.3103.0087

35
W

Lm	K	Dif.		Code
4353	4000	(1)	90°	19.3103.0170
3889	4000	(2)	110°	19.3103.0182

Line S

21
W

Lm	K	Dif.		Code
2662	4000	(1)	90°	19.3103.0077
2378	4000	(2)	110°	19.3103.0089

35
W

Lm	K	Dif.		Code
4353	4000	(1)	90°	19.3103.0172
3889	4000	(2)	110°	19.3103.0184


Line EP

21
W

Lm	K	Dif.		Code
2662	4000	(1)	90°	19.3103.0076
2378	4000	(2)	110°	19.3103.0088

35
W

Lm	K	Dif.		Code
4353	4000	(1)	90°	19.3103.0171
3889	4000	(2)	110°	19.3103.0183



N= 1, 2, 3...

Line EL

26
W

Lm	K	Dif.		Code
3195	4000	(1)	90°	19.3103.0103
2854	4000	(2)	110°	19.3103.0111

42
W

Lm	K	Dif.		Code
5224	4000	(1)	90°	19.3103.0192
4667	4000	(2)	110°	19.3103.0206

Line S

26
W

Lm	K	Dif.		Code
3195	4000	(1)	90°	19.3103.0105
2854	4000	(2)	110°	19.3103.0113

42
W

Lm	K	Dif.		Code
5224	4000	(1)	90°	19.3103.0194
4667	4000	(2)	110°	19.3103.0208

Line EP

26
W

Lm	K	Dif.		Code
3195	4000	(1)	90°	19.3103.0104
2854	4000	(2)	110°	19.3103.0112


42
W

Lm	K	Dif.		Code
5224	4000	(1)	90°	19.3103.0193
4667	4000	(2)	110°	19.3103.0207

X-Line

X-Line

IP	100000h
44	L80B10

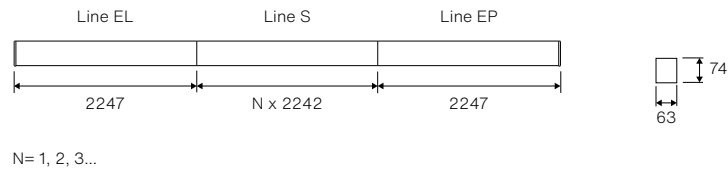

Line EL

56
W

Lm	K	Dif.		Code
6966	4000	(1)	90°	19.3103.0215
6222	4000	(2)	110°	19.3103.0230

Line S


56
W

Lm	K	Dif.		Code
6966	4000	(1)	90°	19.3103.0232
6222	4000	(2)	110°	19.3103.0223

Line EP

56
W

Lm	K	Dif.		Code
6966	4000	(1)	90°	19.3103.0216
6222	4000	(2)	110°	19.3103.0231




17
W

Lm	K	Dif.		Connector	Code
2130	4000	(1)	90°	TYPE-LA	19.3104.0035
2130	4000	(1)	90°	TYPE-LB	19.3104.0036
1902	4000	(2)	110°	TYPE-LA	19.3104.0043
1902	4000	(2)	110°	TYPE-LB	19.3104.0044

28
W

Lm	K	Dif.		Connector	Code
3483	4000	(1)	90°	TYPE-LA	19.3104.0083
3483	4000	(1)	90°	TYPE-LB	19.3104.0084
3111	4000	(2)	110°	TYPE-LA	19.3104.0091
3111	4000	(2)	110°	TYPE-LB	19.3104.0092




26
W

Lm	K	Dif.		Connector	Code
3195	4000	(1)	90°	TYPE-TA	19.3105.0004
3195	4000	(1)	90°	TYPE-TB	19.3105.0005
3195	4000	(1)	90°	TYPE-TC	19.3105.0006
2854	4000	(2)	110°	TYPE-TA	19.3105.0016
2854	4000	(2)	110°	TYPE-TB	19.3105.0017
2854	4000	(2)	110°	TYPE-TC	19.3105.0018

42
W

Lm	K	Dif.		Connector	Code
5224	4000	(1)	90°	TYPE-TA	19.3105.0028
5224	4000	(1)	90°	TYPE-TB	19.3105.0029
5224	4000	(1)	90°	TYPE-TC	19.3105.0030
4667	4000	(2)	110°	TYPE-TA	19.3105.0040
4667	4000	(2)	110°	TYPE-TB	19.3105.0041
4667	4000	(2)	110°	TYPE-TC	19.3105.0042



34
W

Lm	K	Dif.		Connector	Code
4260	4000	(1)	90°	TYPE-X	19.3106.0018
3805	4000	(2)	110°	TYPE-X	19.3106.0006

56
W

Lm	K	Dif.		Connector	Code
6966	4000	(1)	90°	TYPE-X	19.3106.0010
6222	4000	(2)	110°	TYPE-X	19.3106.0014

X-Line Compact


IP 44	50000h L80B10
----------	------------------



Lm	K	Diff.		Code
1544	4000	(1)	90°	19.3252.0001
1379	4000	(2)	110°	19.3252.0002




Lm	K	Diff.		Code
3088	4000	(1)	90°	19.3252.0003
2759	4000	(2)	110°	19.3252.0004



Lm	K	Diff.		Code
4680	4000	(1)	90°	19.3252.0005
4180	4000	(2)	110°	19.3252.0006


Snake

IP	100000h
20	L80B10




17
W

28
W




Lm	K	Diff.		Code
2130	4000	(1)	90°	19.3036.1003
2023	3000	(1)	90°	19.3036.1004
1902	4000	(2)	110°	19.3036.1001
1807	3000	(2)	110°	19.3036.1002

Lm	K	Diff.		Code
3483	4000	(1)	90°	19.3036.1007
3307	3000	(1)	90°	19.3036.1008
3111	4000	(2)	110°	19.3036.1005
2954	3000	(2)	110°	19.3036.1006



34
W

56
W



Lm	K	Diff.		Code
4260	4000	(1)	90°	19.3036.2007
4047	3000	(1)	90°	19.3036.2008
3805	4000	(2)	110°	19.3036.2001
3615	3000	(2)	110°	19.3036.2002

Lm	K	Diff.		Code
6966	4000	(1)	90°	19.3036.2013
6615	3000	(1)	90°	19.3036.2014
6222	4000	(2)	110°	19.3036.2011
5909	3000	(2)	110°	19.3036.2012



Architects Dawidczyk & Partnerzy. Warsaw, Poland

X-Line

Surface & Suspended Linears

Indoor

LUXIONA troll

Shopline



Features

Shopline is a modular system that allows to create more energy-efficient LED lines. It offers a variety of possibilities that fulfil lighting necessities of spaces such as commercial premises, supermarkets, industrial units or warehouses with roofs as high as 15m. Its versatile design also allows a quick installation without any additional tool.

CE		IP 42	IK 08	 850°
LED	CRI ≥80	SDCM 3	50000h L80B10	

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: Steel
Diffuser: PMMA/PC

Installation: Suspended / Surface

Combinations

This modular system allows multiple combinations through the various elements, allowing the system to be adapted to the lighting needs of each project

Lane:
0,599 m, 1,499 m - 2,998 m - 4,497 m
Luminary:
1,499 m
Functional modules:
Regulation, Emergency, With electrified rail ...
Mounting:
Suspended or attached
Blind cover:
1,499 m

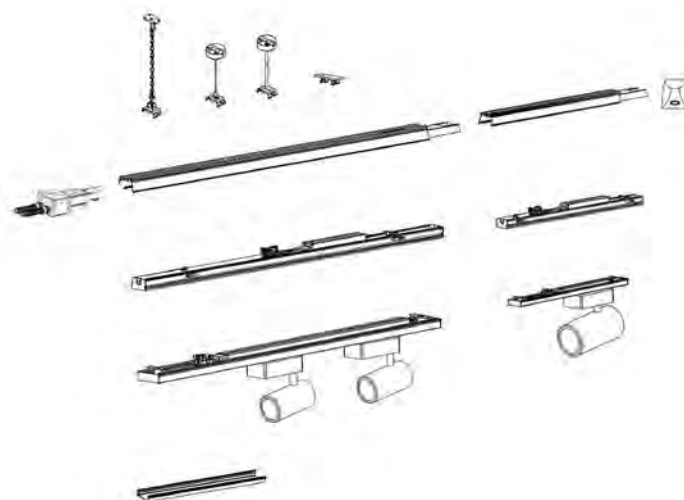

Benefits

- Very efficient modular continuous line LED system for industrial and retail sectors.
- Excellent light quality with adequate luminous flux to meet different lighting needs.
- Quick and easy to install and replace luminaires.
- Flexible solution thanks to the great variety of modules and possibilities.

Installation

Shopline is characterized by an easy and fast installation system without the use of additional tools. Changing a luminaire takes less than 45 seconds. Direct mounting to the ceiling or suspended using accessories. Indicated above all for ceilings of great heights. Industrial buildings, warehouses, teaching centers, supermarkets and other shopping centers, offices, laboratories, pavilions and other facilities.



Luxiona Corporate Warehouse, Barcelona. Spain


Shopline

Shopline configuration



Rail

Length. Rail to attach or suspend. Sheet steel profile in white finish.
Measurements: L = 0.599m, L = 1,499m - L = 2,998m - L = 4,497m



+

Cabling

Rails pre-wired and equipped with 5, 8 and 12 of 2.5 mm².



+

Cabling

The LED luminaires can be mounted to the Shopline track with versions for 5, 8 and 12 cables.



+

Power


Variety of light fluxes to meet different lighting needs and LEDs that ensure efficient lighting.



+

Luminaire length

Linear modular system with 0.570m, 1.414m luminaire modules, but visually one line of light without interruptions.



+

Color temperature

With a color rendering index of RA≥80, a variety of color temperature of 3000K, 4000K, 5000K, 6000K and a low UGR.



+

Optics

The luminaires incorporate lenses with different opening angles: double asymmetric, asymmetric left, asymmetric right, matt diffuser, extensive, intensive, super-intensive.

Equipment

Equipment with the possibility of regulation and emergency to provide flexibility, comfort and energy efficiency.

06 = length 0,6 m (on request)
 15 = length 1,5 m
 30 = length 3 m
 45 = length 4,5 m

rail 11.0282.■■■■.33
 end rail 11.0283.■■■■.33

05 = 5-wire internal wiring (on request)
 08 = internal wiring 8 wires
 12 = internal wiring 12 wires (on request)

rail 11.0282.■■■■.33
 end rail 11.0283.■■■■.33

5 = 5-wire internal wiring (on request)
 8 = internal wiring 8 wires
 1 = internal wiring 12 wires (on request)

11.14.■■■■.33



3 = LED 35W - 5600 lm
 5 = LED 50W - 8000 lm
 7 = LED 75W - 11600 lm

11.14.■■■■.33

1 = 600 mm (on request)
 2 = 1500 mm

11.14.■■■■.33

3 = 3000K - (on demand)
 4 = 4000K
 5 = 5000K - (on demand)
 6 = 6000K - (on demand)

11.14.■■■■.33



1 = Superintensive 25°



2 = Intensive 50°



3 = Extensive 90°



4 = Clear diffuser 120°



5 = Matte diffuser 120°



6 = Asymmetric right



7 = Asymmetric left



8 = Double Asymmetric

11.14.■■■■.33

1 = Electronic ON-OFF
 2 = Electronic dimmable 1-10V
 3 = Electronic dimmable DALI
 4 = Emergency1 (power supply unit) - (on request, requires 11-wire system)
 5 = Emergency2 (Emergency kit with 12W, 3600 mAh, 3h battery)
 6 = Emergency2 (Emergency kit with 6W, 1800 mAh, 3h battery)

11.14.■■■■.33


11.14.■■■■.33

The reference is made up of twelve digits and is created when the elements that make up the product are chosen by placing the partial numbers of each accessory in the places indicated.

Standard finishes
Add needed finish to complete the product reference.

.33

Description	Code
Rail with de 5 wires	11.0282.1505
Rail with de 8 wires	11.0282.1508
Rail end of line with de 5 wires	11.0283.1505
Rail end of line with de 8 wires	11.0283.1508



35
W

Lm	K		Code
5520	4000	25°	11.1453.2411
5450	4000	50°	11.1453.2421
5235	4000	90°	11.1453.2431
5442	4000	120° Claro	11.1453.2441
4929	4000	120° Mate	11.1453.2451
5557	4000	Assym R°	11.1453.2461
5557	4000	Assym L°	11.1453.2471
5447	4000	Double Asym°	11.1453.2481

50
W

Lm	K		Code
7825	4000	25°	11.1455.2411
7770	4000	50°	11.1455.2421
8117	4000	90°	11.1455.2431
7762	4000	120° Claro	11.1455.2441
7030	4000	120° Mate	11.1455.2451
7925	4000	Assym R°	11.1455.2461
7925	4000	Assym L°	11.1455.2471
7765	4000	Double Asym°	11.1455.2481

75
W

Lm	K		Code
11738	4000	25°	11.1457.2411
11665	4000	50°	11.1457.2421
11503	4000	90°	11.1457.2431
11643	4000	120° Claro	11.1457.2441
10545	4000	120° Mate	11.1457.2451
11586	4000	Assym R°	11.1457.2461
11586	4000	Assym L°	11.1457.2471
11648	4000	Double Asym°	11.1457.2481

Soportes

.00



11.0280.0302
Direct suspension bracket



11.0280.0303
Steel cable suspension



11.0280.0304
Chain suspension



11.0280.0305
Rod suspension

Tapas

.33



11.0280.0307
End cap



11.1400.2000
Blind cover. Length 1500mm



11.1450.2000
Tray for three-phase rail

11.0280.0311 ^N
End cover for module with diffuser

11.0280.0312 ^N
End cover for module with cover blind

Connector

.00



11.0281.0005 ^N
5-wire connector



11.0281.0205 ^N
5-wire power box

11.0281.0008
8-wire connector

11.0281.0208
8-wire power box

Universal line by Luxiona Designers N



Features

Surface mounted luminaires with highly efficient LED. Luminaire body made of extruded aluminium, anodized. It may set up different optical systems.

1. PMMA microprismatic or opal diffusers.

2. Optical lense-based system. They may be directly installed on ceiling or suspended, with the corresponding accessories. Versions for lines with fast modular-connection systems are available.

CE		IP 20	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.


Body: Steel sheet / Aluminum

Diffuser:

- (1) Micro-PRM (micro-prismatic diffuser PMMA)
- (2) OPTICS (optical system based on lenses)
- (3) PLX (PMMA opal)

Installation: Ceiling / Suspended / Surface

Also available on other typology_page 403




28
W

Lm	K	UGR	Diffuser		Code
3854	4000	<19	(1)	95°	19.3127.0001
3808	4000	-	(2)	95°	19.3127.0002
3483	4000	-	(3)	110°	19.3127.0006

53
W

Lm	K	UGR	Diffuser		Code
6913	4000	<19	(1)	95°	19.3127.0010
6830	4000	-	(2)	95°	19.3127.0011
6247	4000	-	(3)	110°	19.3127.0015




56
W

Lm	K	UGR	Diffuser		Code
7616	4000	-	(2)	95°	19.3127.0019
6966	4000	-	(3)	110°	19.3127.0023

106
W


Lm	K	UGR	Diffuser		Code
13827	4000	<19	(1)	95°	19.3127.0027
13661	4000	-	(2)	95°	19.3127.0028
12495	4000	-	(3)	110°	19.3127.0032

Universal line



N= 1, 2, 3...

Line EL



28
W

Lm	K	Diffuser		Code
3808	4000	(2)	95°	19.3127.0003
3483	4000	(3)	110°	19.3127.0007

53
W

Lm	K	Diffuser		Code
6830	4000	(2)	95°	19.3127.0012
6247	4000	(3)	110°	19.3127.0016

Line S



28
W

Lm	K	Diffuser		Code
3808	4000	(2)	95°	19.3127.0005
3483	4000	(3)	110°	19.3127.0009

53
W

Lm	K	Diffuser		Code
6830	4000	(2)	95°	19.3127.0014
6247	4000	(3)	110°	19.3127.0018

Line EP



28
W

Lm	K	Diffuser		Code
3808	4000	(2)	95°	19.3127.0004
3483	4000	(3)	110°	19.3127.0008


53
W

Lm	K	Diffuser		Code
6830	4000	(2)	95°	19.3127.0013
6247	4000	(3)	110°	19.3127.0017



N= 1, 2, 3...

Line EL




56
W

Lm	K	Diffuser		Code
7616	4000	(2)	95°	19.3127.0020
6966	4000	(3)	110°	19.3127.0024

106
W

Lm	K	Diffuser		Code
13661	4000	(2)	95°	19.3127.0029
12495	4000	(3)	110°	19.3127.0033

Line S




56
W

Lm	K	Diffuser		Code
7616	4000	(2)	95°	19.3127.0031
12495	4000	(3)	110°	19.3127.0035

106
W

Lm	K	Diffuser		Code
13661	4000	(2)	95°	19.3127.0031
12495	4000	(3)	110°	19.3127.0035

Line EP



56
W

Lm	K	Diffuser		Code
7616	4000	(2)	95°	19.3127.0021
6966	4000	(3)	110°	19.3127.0025

106
W

Lm	K	Diffuser		Code
13661	4000	(2)	95°	19.3127.0030
12495	4000	(3)	110°	19.3127.0034

Accessories

6E1-500KWANK-3
Suspension New Type-A+B 24
length 1,5m cable 3X set

6E1-500KWB24K-3
Suspension New Type-A+E 24
length 1,5m cable 3X set

6E1-8670-B-1,5
Suspension New Type-E length
1,5m without cable 1-point

6E1-8670-B-1,5-3X
Suspension New Type-F length
1,5m cable 3X 1-point

01LU-UN
Universal Line - ceiling clip

01LU-UPZ
Universal Line - clips for slings

19.3127.0036
Unit with 3-phases track for
spotlights installation

Universal line

Surface & Suspended Linears



Indoor

LUXIONA troll



Features

Luminaire made of steel sheet, powder coated with finish in grey. It allows to set up different luminous flux sets and is available for surface and suspended versions.

CE		IP 20	IK 04	DRIVER INCL.	220 240 V	50 60 Hz
LED	CRI ≥80	SDCM 3	100000h L80B10	UGR <19		

Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.

Body: Steel sheet

Diffuser:

(1) Micro-PRM (micro-prismatic diffuser PMMA)

(2) PMMA opal


(3) PLX/Micro-PRM (PMMA opal/micro-prismatic diffuser PMMA) [up/down]

Installation: Ceiling

Matrix Surface



Installation: Surface



17 W				
Lm	K	Diffuser		Code
2243	4000	(1)	90°	19.3087.0002

34 W				
Lm	K	Diffuser		Code
4487	4000	(1)	90°	19.3087.0006

28 W				
Lm	K	Diffuser		Code
3668	4000	(1)	90°	19.3087.0004

56 W				
Lm	K	Diffuser		Code
7337	4000	(2)	90°	19.3087.0008

Matrix



Installation: Suspended



17 W				
Lm	K	Diffuser		Code
2243	4000	(1)	90°	19.3083.0001

34 W				
Lm	K	Diffuser		Code
4487	4000	(1)	90°	19.3083.0003

28 W				
Lm	K	Diffuser		Code
3668	4000	(1)	90°	19.3083.0002

56 W				
Lm	K	Diffuser		Code
7337	4000	(1)	90°	19.3083.0004

Accessories
for Matrix

6E1-500KW21K-3Y
Suspension Y type G + H finished
in gray. Length 1.5 meters, 3-pole
power supply

Matrix

Surface & Suspended Linears


Indoor

LUXIONA troll

Matrix Line



Installation: Suspended



Line EL					Line S					Line EP				
17W					17W					17W				
Lm	K	Diffuser		Code	Lm	K	Diffuser		Code	Lm	K	Diffuser		Code
2243	4000	(1)	90°	19.3084.0001	2243	4000	(1)	90°	19.3084.0003	2243	4000	(1)	90°	19.3084.0002
28W					28W					28W				
Lm	K	Diffuser		Code	Lm	K	Diffuser		Code	Lm	K	Diffuser		Code
3668	4000	(1)	90°	19.3084.0004	3668	4000	(1)	90°	19.3084.0006	3668	4000	(1)	90°	19.3084.0005
34W					34W					34W				
Lm	K	Diffuser		Code	Lm	K	Diffuser		Code	Lm	K	Diffuser		Code
4487	4000	(1)	90°	19.3084.0007	4487	4000	(1)	90°	19.3084.0009	4487	4000	(1)	90°	19.3084.0008
56W					56W					56W				
Lm	K	Diffuser		Code	Lm	K	Diffuser		Code	Lm	K	Diffuser		Code
7337	4000	(1)	90°	19.3084.0010	7337	4000	(1)	90°	19.3084.0012	7337	4000	(1)	90°	19.3084.0011


Accessories
for Matrix Line

6E1-500KW211P-3Y
Y suspension with feed
3-pole, type G gray, L = 1.5m

6E1-500KW211P-BY
Y suspension without power
type G gray, L = 1.5m

Matrix Up&down

Installation: Suspended



Lm	K	Diffuser		Code
4798	4000	(3)	90°	19.3085.0002



Lm	K	Diffuser		Code
6583	4000	(3)	90°	19.3085.0005




Lm	K	Diffuser		Code
7570	4000	(3)	90°	19.3085.0004



Lm	K	Diffuser		Code
9055	4000	(3)	90°	19.3085.0006

Matrix Up&down Line

Installation: Suspended



Line EL



Lm	K	Diffuser		Code
4798	4000	(3)	90°	19.3086.0004



Lm	K	Diffuser		Code
6583	4000	(3)	90°	19.3086.0013



Lm	K	Diffuser		Code
7570	4000	(3)	90°	19.3086.0010



Lm	K	Diffuser		Code
9055	4000	(3)	90°	19.3086.0016

Line S




Lm	K	Diffuser		Code
4798	4000	(3)	90°	19.3086.0006



Lm	K	Diffuser		Code
6583	4000	(3)	90°	19.3086.0015



Lm	K	Diffuser		Code
7570	4000	(3)	90°	19.3086.0012



Lm	K	Diffuser		Code
9055	4000	(3)	90°	19.3086.0018

Line EP



Lm	K	Diffuser		Code
4798	4000	(3)	90°	19.3086.0005



Lm	K	Diffuser		Code
6583	4000	(3)	90°	19.3086.0014



Lm	K	Diffuser		Code
7570	4000	(3)	90°	19.3086.0011



Lm	K	Diffuser		Code
9055	4000	(3)	90°	19.3086.0017

328
Flex

334
Tubular

338
Kubik

346
Zas

330
Eclipse

336
Luxwall

340
X-Line



Features

Body made of Die-casting aluminium. Small size cylindrical head suitable for being adjusted. The luminaire includes latest generation LEDs with lenses. Electronic driver incorporated in the base.

CE		IP 20	 850°	 90°	 355°
LED	CRI ≥80	SDCM 3	50000h L80B10		


DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: Iron + Aluminium Body

Installation: Wall / Surface



7W
+3W


Lm	K	Code
910 + 300	3200	11.2016.1301



9W
+3W

Lm	K	Code
1170 + 300	3200	11.2016.2301

Eclipse

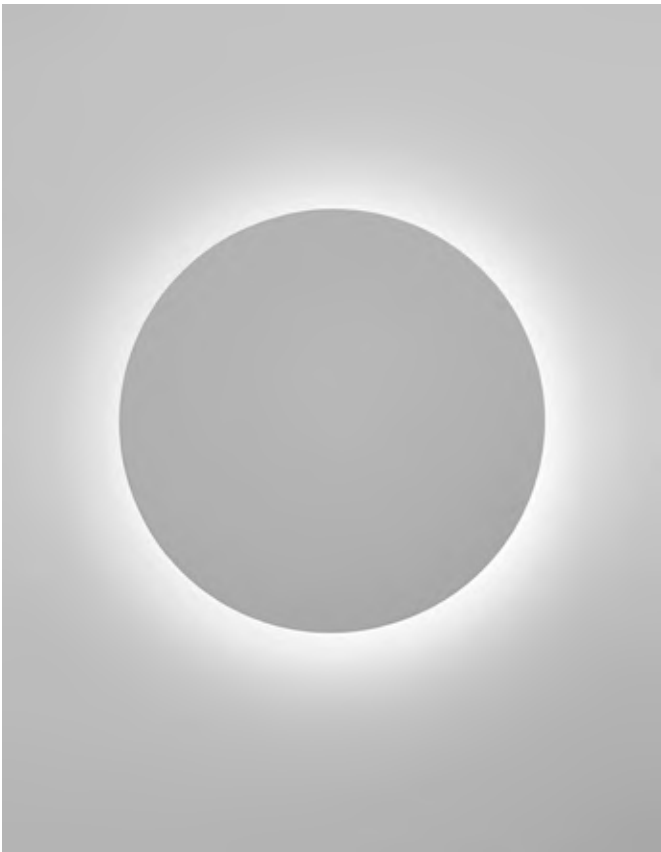

Features

Made of injected aluminium, it includes a hidden opal diffuser that allows to create indirect lighting and backlighting of the luminaire.




Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium

Installation: Wall / Ceiling / Surface




Eclipse



11
W


Lm	K	Code
1030	3000	11.1914.1301




15
W

Lm	K	Code
1328	3000	11.1914.3301

Wall Luminaires




Indoor



11
W

Lm	K	Code
1032	3000	11.1914.2301



15
W

Lm	K	Code
1405	3000	11.1914.4301

LUXIONA troll





Tubular

by Luxiona Designers N

Tubular W



Features

Body made of extruded aluminium and steel sheet. There are versions with a single light source or two. Available asymmetrical version, which is excellent to light up circulation areas such as corridors, landings or lifts halls.



Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.

Body: Aluminium

Installation: Wall / Surface

LED personalisation

Check all types of LEDs on guide's page 23




CRI
≥80

SDCM
3


60000h
L80B10



DRIVER
INCL.



Tubular



9
W

15
W

Incandescent or LED equivalent

11W
max.

Wall Luminaires




CRI
≥80

SDCM
3

60000h
L80B10



DRIVER
INCL.



Indoor

19
W

21
W

28
W

Incandescent or LED equivalent

11W
max. x 2

Lamp Holder
GU 10 - PAR 51

Code
11.1910.2300

LUXIONA troll



Features

Wall-mounted architectural luminaires for decorative or accent lighting in interiors. Suitable for hospitality and residential applications. Luminaire body painted in white (also available in other finishes). The product is available in two light sources. It can be equipped with LED and driver or G9 socket. Wall luminaire for indirect lighting.



Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.

Body: Steel sheet

Installation: Wall / Surface

LED personalisation

Check all types of LEDs on guide's page 23

IP
40


LED

CRI
≥80

80000h
L80B10

DRIVER
INCL.

Consult for dimming options.



10
W

Lm	K		Code
296	4000	90+38°	19.3022.0002

DRIVER
NOT
REQUIRED

IP
20

No light source included (G9)


15W
max.

Lamp Holder		Code
G9	90+38°	19.3021.0001



Features

Luminaire for interchangeable LED sources (called retrofit) with a G9 base. The body is made of aluminum. The open design provides very easy access to the source and its replacement, and very easy mounting on the wall as well. Simple construction giving an interesting light effect. Recommended for decorative lighting of passages, corridors or staircases.



No light source included (G9)

Standard finishes

Add needed finish to complete the product reference.




Other finishes

Ask us for custom colours.

Body: Aluminium

Installation: Wall / Surface



15W
max.

Lamp Holder		Code
G9	110°	19.3019.1001

Kubik

Wall Luminaires



Indoor

LUXIONA troll



Features

Luminaires designed for surface mounting. Made of aluminium with an opal polycarbonate diffuser, they include highly efficient LEDs. Easy-to-install, specifically recommended for damp areas.



Consult for dimming options.

Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.

Installation: Wall / Surface


LED personalisation

Check all types of LEDs on guide's page 23

X-Wall NEW

100000h
L80B10

Body: Anodized Aluminium
Diffuser: PC opal




9 W ON/OFF

Lm	K		Code
815	3000	90+47°	19.3214.0001
858	4000	90+47°	19.3214.0002

14 W ON/OFF

Lm	K		Code
1361	3000	90+47°	19.3214.0003
1415	4000	90+47°	19.3214.0004




13 W ON/OFF

Lm	K		Code
1222	3000	90+47°	19.3214.0006
1287	4000	90+47°	19.3214.0007

21 W ON/OFF

Lm	K		Code
2000	3000	90+47°	19.3214.0008
2105	4000	90+47°	19.3214.0009




17 W ON/OFF

Lm	K		Code
1631	3000	90+47°	19.3214.0011
1716	4000	90+47°	19.3214.0012

28 W ON/OFF

Lm	K		Code
2665	3000	90+47°	19.3214.0013
2807	4000	90+47°	19.3214.0014



21 W ON/OFF

Lm	K		Code
2037	3000	90+47°	19.3214.0016
2146	4000	90+47°	19.3214.0017


31 W ON/OFF

Lm	K		Code
3333	3000	90+47°	19.3214.0018
3509	4000	90+47°	19.3214.0019

50000h
L80B10




TW (Tunable white)




16 W

Lm	K		Code
1500	2700-6500	90+47°	19.3214.0005




24 W

Lm	K		Code
2000	2700-6500	90+47°	19.3214.0010



32 W

Lm	K		Code
2660	2700-6500	90+47°	19.3214.0015



40 W

Lm	K		Code
3324	2700-6500	90+47°	19.3214.0020

X-Line

Wall Luminaires

Indoor

LUXIONA troll

X-Wall K9

100000h
L80B10



Body: Aluminium
Diffuser: PLX (PMMA opal)



9 W ON/OFF

Lm	K		Code
724	4000	90+47°	19.3117.0002




14 W ON/OFF

Lm	K		Code
1184	4000	90+47°	19.3117.0008



13 W ON/OFF




17 W ON/OFF

Lm	K		Code
1448	4000	90+47°	19.3117.0012



28 W ON/OFF

Lm	K		Code
2368	4000	90+47°	19.3117.0020




21 W ON/OFF

Lm	K		Code
1811	4000	90+47°	19.3117.0015



35 W ON/OFF

Lm	K		Code
2961	4000	90+47°	19.3117.0025




26 W ON/OFF

Lm	K		Code
2173	4000	90+47°	19.3117.0017



42 W ON/OFF

Lm	K		Code
3553	4000	90+47°	19.3117.0029



34 W ON/OFF

Lm	K		Code
2897	4000	90+47°	19.3117.0023



56 W ON/OFF

Lm	K		Code
4737	4000	90+47°	19.3117.0033



Lm	K		Code
3621	4000	90+47°	19.3117.0027


X-Wall K9 Compact

50000h
L80B10

Body: Aluminium
Diffuser: PLX (PMMA opal)



Lm	K		Code
1009	3000	90+47°	19.3254.0001
1050	4000	90+47°	19.3254.0002

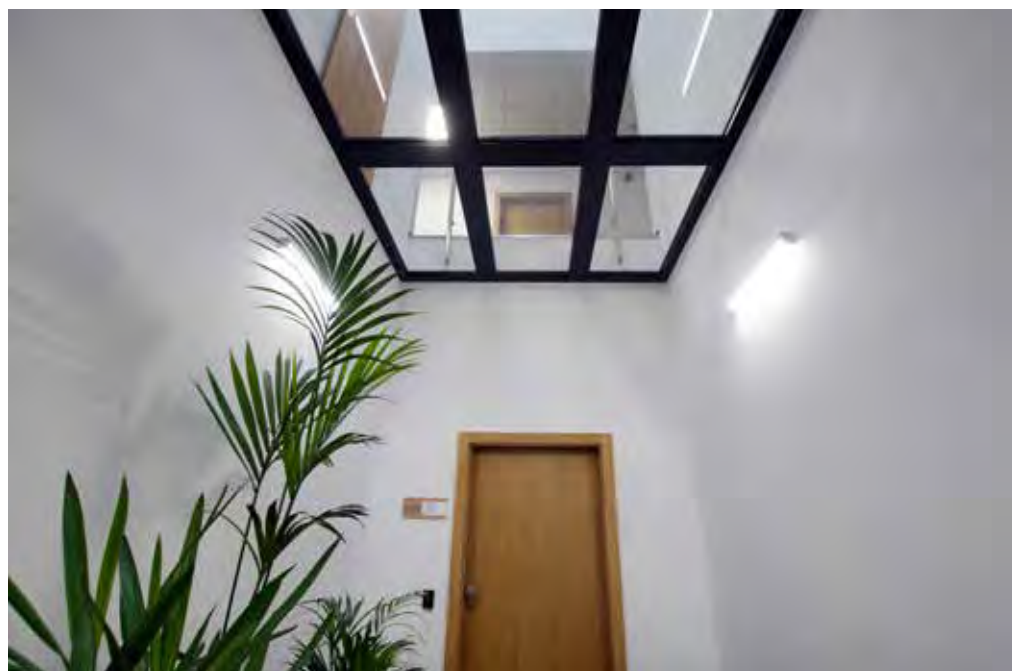

X-Line Wall UD


IP	100000h
20	L80B10

Body: Aluminium
Diffuser: PLX (PMMA opal)



17 W	ON/ OFF
---------	------------

Lm	K		Code
1902	4000	110°	19.3116.0008



42 W	ON/ OFF
---------	------------

Lm	K		Code
4667	4000	110°	19.3116.0014






X-Line

Wall Luminaires

Indoor

LUXIONA troll

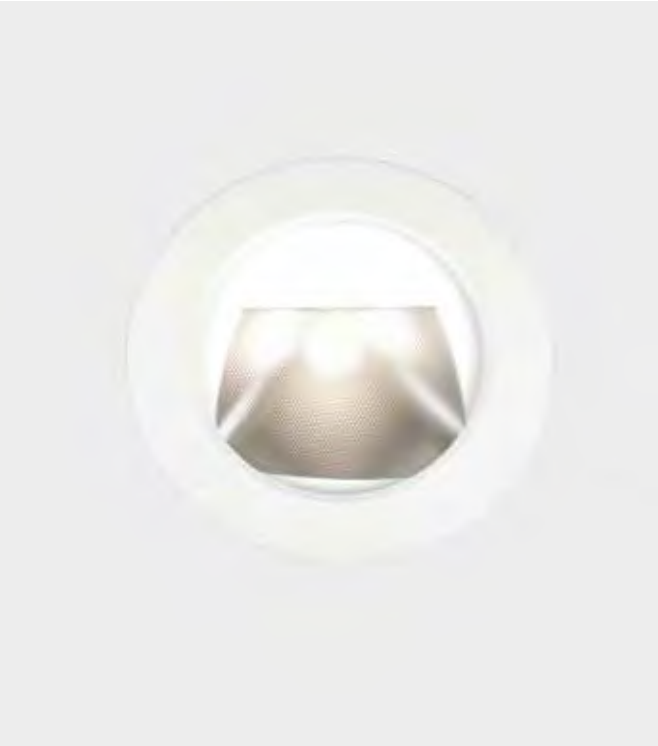

Features


Innovative design luminaires, small size made of injected aluminium. Their body is asymmetrical, which is excellent for marking off walls at a low height at any premise: hotels, residential areas, stores, theatres, cinemas, halls or airports.

Installation: Recessed / Wall


	IP 20	DRIVER INCL.	220 240 V	50 60 Hz
	CRI ≥80	SDCM 3	50000h L70B10	

Standard finishes
Add needed finish to complete the product reference.


Body: Aluminium





Consult for dimming options.



Lm	K		Code	
374	3000	24° + 15°	11.2014.0031	
404	4000	24° + 15°	11.2014.0041	




Lm	K		Code
80	3000	Asym.	11.1605.0031
90	4000	Asym.	11.1605.0041



Lm	K		Code
80	3000	Asym.	11.1605.0032
90	4000	Asym.	11.1605.0042

Accessories

11.1605.1901
Housing

350
Cava

351
Cep

352
Shiitake

354
Palmera



Features

Table luminaire with aluminium and steel structure and polycarbonate diffuser. Built-in. Newest generation LEDs. It includes Touch dimming adjustment system with 3 intensity levels. The luminaire also includes a lithium battery that allows it to work autonomously for 9 hours at maximum intensity. It includes power connector with charger.

CE

IP 20

850°

LED

CRI ≥80

SDCM 3

50000h L70B10

Battery charger


Standard finishes
Add needed finish to complete the product reference.

Body: Plastic Body

.04

.63

Installation: Table / Surface

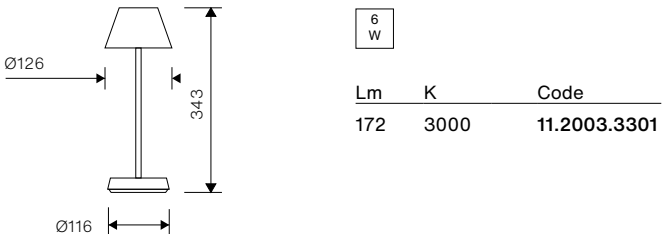



Features

Table luminaire with aluminium and steel structure and polycarbonate diffuser. Built-in. Newest generation LEDs. It includes Touch dimming adjustment system with 3 intensity levels. The luminaire also includes a lithium battery that allows it to work autonomously for 9 hours at maximum intensity. It includes power connector with charger.

CE

IP 20

LED

CRI ≥80

SDCM 3

50000h L70B10

Battery charger


Standard finishes
Add needed finish to complete the product reference.

.04

.63

Body: Plastic Body

Installation: Table / Surface



11 W		
Lm	K	Code
326	3000	11.2003.2301

Shiitake N



Features

Table lamp with aluminium structure and polycarbonate diffuser. Incorporates the latest generation of LEDs. Touch control system with 3 levels of intensity included. The luminaire is fitted with a lithium battery that offers an autonomy of 6.5 hours at maximum intensity. Includes power connector with charger




Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium

Installation: Floor / Surface



2 W

Lm	K	Code
180	3000	11.2003.4001



Palmera by Jean Nouvel



Features

Palmera arises from TROLL and Jean Nouvel's joint objective of creating a sense of natural light. When observing the luminaires, there is a feeling of being under the palm trees themselves, cherishing absolute peace and a gentle breeze. It is poetry, just as light is in nature. According to Jean Nouvel, "the lamp is perfect for napping"



Standard finishes

Add needed finish to complete the product reference.




Other finishes

Ask us for custom colours.

Body: Sheet Steel

Installation: Floor / Table / Surface



3,5
W

Lamp Holder	Lm	K	Code
G9	350	3000	11.4694.0001



358
Flexiled

366
Neonled

364
Lightline

368
Perfiled



Features

Flexiled is a product with excellent lighting performance and high colour evenness, made up of highly efficient LEDs SMD. The product has its versions for both indoors and outdoors, and it is versatile and easy-to-install. It is ideal to be applied in small spaces due to its small size, serving general, accent or ambient lighting for any type of modern and practical architecture, as well as for any type of atmosphere. Made of flexible PCB 8mm, 10mm or 12mm wide with densities of LEDs/m that vary from 60 to 280 LEDs/m. It includes 5m strips that may be cut to measure in multiples of 50mm or 100mm depending on LEDs/m density. It also includes 3m of easy-to-install adhesive tape on its back. Is has waterproof and enclosed IP66 versions with silicone cover and square profile.



Consult for 50 m reels

Standard finishes
Add needed finish to complete the product reference.




Body: Luminaire built in clear silicone UV protected.

Installation: Wall / Ceiling / Floor / Surface

IP

20



19
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
854	RGBW	60	100	120°	11.7891.1301

Accessories



11.7891.0007
PCB connector PCB-Cable for
RGBW flexible strips PCB 12mm
IP20




11.7891.0008
PCB PCB Connector for RGBW
PCB 12mm IP20 Flexible Strip

Ramis

IP

20

TW (Tunable white)



20
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
1684	TW	280	50	120°	11.7891.1401

Accessories



11.7891.0009
PCB connector PCB-Cable for TW
PCB 10mm flexible strips



11.7891.0010
PCB PCB connector for TW PCB
10mm flexible strips

Flexiled


LineaLed

Indoor

LUXIONA troll

Sena

IP
20



5
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
495	2300	60	100	120°	11.7891.0581
500	2700	60	100	120°	11.7891.0582
506	3000	60	100	120°	11.7891.0583
543	4000	60	100	120°	11.7891.0584
535	6000	60	100	120°	11.7891.0586

10
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
990	2300	120	50	120°	11.7891.1081
1000	2700	120	50	120°	11.7891.1082
1006	3000	120	50	120°	11.7891.1083
1093	4000	120	50	120°	11.7891.1084
1086	6000	120	50	120°	11.7891.1086



15
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
1490	2300	120	50	120°	11.7891.1581
1505	2700	120	50	120°	11.7891.1582
1521	3000	120	50	120°	11.7891.1583
1650	4000	120	50	120°	11.7891.1584
1670	6000	120	50	120°	11.7891.1586

20
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
1980	2300	120	50	120°	11.7891.2081
2000	2700	120	50	120°	11.7891.2082
2066	3000	120	50	120°	11.7891.2083
2032	4000	120	50	120°	11.7891.2084
2012	6000	120	50	120°	11.7891.2086




Accessories

11.7891.0001
PCB-Cable connector for flexible strip with PCB 8mm
IP20 (5W/m and 10W/m)

11.7891.0004
PCB-Cable connector for flexible strip with PCB 8mm
IP20 (5W/m and 10W/m)

11.7891.0002
PCB-Cable connector for flexible strip with PCB 10mm
IP20 (15W/m and 20W/m)

11.7891.0005
PCB-Cable connector for flexible strip with PCB 10mm
IP20 (15W/m and 20W/m)

5
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)	▲	Code
500	2700	60	100	120°	11.7851.0582
506	3000	60	100	120°	11.7851.0583
543	4000	60	100	120°	11.7851.0584
535	6000	60	100	120°	11.7851.0586

10
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)	▲	Code
1000	2700	120	50	120°	11.7851.1082
1006	3000	120	50	120°	11.7851.1083
1093	4000	120	50	120°	11.7851.1084
1086	6000	120	50	120°	11.7851.1086

15
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)	▲	Code
1505	2700	120	50	120°	11.7851.1582
1521	3000	120	50	120°	11.7851.1583
1650	4000	120	50	120°	11.7851.1584
1670	6000	120	50	120°	11.7851.1586

20
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)	▲	Code
2000	2700	120	50	120°	11.7851.2082
2066	3000	120	50	120°	11.7851.2083
2032	4000	120	50	120°	11.7851.2084
2012	6000	120	50	120°	11.7851.2086



Accessories

11.7851.0002

PCB-Cable connector for flexible strip with PCB 10mm IP66 (15W/m and 20W/m)

11.7851.0003

PCB-Cable connector for flexible strip with PCB 10mm IP66 (15W/m and 20W/m)

11.7851.0001

Installation kit for flexible strip with PCB 10mm IP66 (15W/m, 20W and RGB)

11.7851.0008

PCB-Cable connector for flexible strip with PCB 8mm IP66 (5W/m and 10W/m)

11.7851.0009


PCB-Cable connector for flexible strip with PCB 8mm IP66 (5W/m and 10W/m)

11.7851.0010

Installation kit for flexible strip with PCB 8mm IP66 (5W/m and 10W/m)

Flexiled

Po



15
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
480	RGB	60	100	120°	11.7851.1301



Accessories

11.7851.0004
Connector PCB PCB for flexible
strips RGB PCB 10 mm IP66

11.7851.0005
PCB PCB Connector for RGB
PCB 10mm IP66 Flexible Strips



International Contemporary Art Fair ArcoMadrid, Spain.

Flexiled

LineaLed

Indoor

LUXIONA troll

Lightline

Rin



Features

Lightline is a flexible strip with high brightness and high density of LEDs (700 LEDs/m) that allows a lighting system with a frosted effect, free of spots even when using LED profiles at low level. Its versatility offers a wide range of shades of white, from extra-warm to neutral white with high chromatic rendering. Product with 12mm wide PCB, 700 LEDs/m density. It includes 5m strips that may be cut to measure in multiples of 10mm. It also includes 3m of easy-to-install adhesive tape on its back. The flexible strips must be mounted on even surfaces free of dust or grease. It is recommended to install them on metal profiles, if possible, aluminium. It is also better to apply an additional mechanical attachment on other surfaces.


CE		IP 20		24 VDC
LED	CRI ≥80	SDCM 3	30000h	

Standard finishes
Add needed finish to complete the product reference.



Body: Luminaire built in clear silicone UV protected.

Installation: Wall / Ceiling / Floor / Surface



24
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
2376	2300	700	10	120°	11.7891.2481
2400	2700	700	10	120°	11.7891.2482
2479	3000	700	10	120°	11.7891.2483
2474	4000	700	10	120°	11.7891.2484



Accessories

11.7891.0003

PCB-Cable connector for flexible strip with PCB 12mm IP20

11.7891.0006

PCB-Cable connector for flexible strip with PCB 12mm IP20





Sunglasses brand Mykita flagstore, Barcelona. Spain

Features

Neonled is a LEDs flexible tape, silicone enclosed, with excellent lighting performance and highly even and efficient. It is a product to be used both indoors and outdoors, really versatile and easy-to-install. It offers two shades of white: warm or neutral. It also offers either front-light or side-light tape emission versions. Product with 8mm flexible PCB, density of 144 LEDs/m and cuts in multiples of 100mm.

Made of silicone resistant to UVA rays. The flexible strips must be mounted on even surfaces free of dust or grease. It is recommended to install them on metal profiles, if possible, aluminium. It is also better to apply an additional mechanical attachment by using each model's installation kit. It comes in 5 linear m rolls.

CE

IP 65

LED

CRI ≥80

SDCM 3

30000h

DRIVER INCL.

24 VDC

Standard finishes
Add needed finish to complete the product reference.




Body: Luminaire built in clear silicone UV protected.

Installation: Wall / Ceiling / Floor / Surface

Loa



Lateral light




9
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
215	3000	144	100	120°	11.7871.0983
225	4000	144	100	120°	11.7871.0984

Sonora



Frontal light



9
W/M

Lm/m	K	N° LEDs/m	Multiple length of cut (mm)		Code
215	3000	144	100	120°	11.7861.0983
225	4000	144	100	120°	11.7861.0984



Accesorios

11.7871.0001
Installation kit for silicone encapsulated flexible strip, IP66 side emission. For Loa

11.7861.0001
Installation kit for silicone encapsulated flexible strip, IP66 side emission. For Sonora

Neonled

LineaLed

Indoor

LUXIONA troll

Perfiled

Roncal
Loira
Veny

Mosela
Ica



Features

Our range of TROLL Linear profiles offers professional support for a perfect installation of Flexiled strips, producing the necessary level of heat dissipation for a proper and most efficient performance. They are made of aluminium and comprise a range where there are lighting solutions for any necessity. Loira - Built-in profile Roncal - Surface mounted profile Veny - 45° corner profile Irati - High dissipation surface mounted profile Luna - Low level surface mounted profile Mosela - Up&Down indirect wall light profile Ica - Built-in ground-coating wall profile



Installation: Wall / Ceiling / Floor / Surface

Ball joint accessory (2 pcs) Roncal - surface profile
Loira - recessed profile
Veny - 45° corner profile
Mosela - up&down indirect wall light profile
Ica - recessed wall profile for floor washlights


Roncal

Standard finishes
Add needed finish to complete the product reference.



Body: Anodized aluminium profile (Alu6063-T5)
Diffuser: PC
(1) Transparent
(2) Opal

Surface profile set




References include aluminum profile, diffuser, end caps and installation clip

L(mm)	Diffuser	Code
1000	(1)	11.7890.0021
2000	(1)	11.7890.0022
1000	(2)	11.7890.1021
2000	(2)	11.7890.1022

Accessories



11.7890.0412
Suspension accessory (1 unit)



11.7890.0411
Ball joint accessory (2 units)


Loira

Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium profile (Alu6063-T5)
Diffuser: PC
(1) Transparent
(2) Opal

suspension accessory



References include aluminum profile, diffuser, end caps and installation clip

L(mm)	Diffuser	Code
1000	(1)	11.7890.0011
2000	(1)	11.7890.0012
1000	(2)	11.7890.1011
2000	(2)	11.7890.1012

Perfled

LineaLed

Indoor

LUXIONA troll

Perfiled


Veny

Standard finishes
Add needed finish to complete the product reference.



Body: Anodized aluminium profile (Alu6063-T5)
Diffuser: PC
(1) Transparent
(2) Opal

Conjunto perfil esquinero a 45°



References include aluminum profile, diffuser, end caps and installation clip

L(mm)	Diffuser	Code
1000	(1)	11.7890.0031
2000	(1)	11.7890.0032
1000	(2)	11.7890.1031
2000	(2)	11.7890.1032


Mosela

Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium profile (Alu6063-T5)
Diffuser:
(1) Transparent
(2) Opal

Up&down indirect wall light profile



References include aluminum profile, diffuser, end caps and installation clip

L(mm)	Diffuser	Code
1000	(1)	11.7890.0041
2000	(1)	11.7890.0042
1000	(2)	11.7890.1041
2000	(2)	11.7890.1042





Ica

Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium profile (Alu6063-T5)
Diffuser:
(1) Transparent
(2) Opal

Wall recessed profile set for floor shower wall



References include aluminum profile, diffuser, end caps and installation clip

L(mm)	Diffuser	Code
1000	(1)	11.7890.0051
2000	(1)	11.7890.0052
1000	(2)	11.7890.1051
2000	(2)	11.7890.1052

374
Atena

382
Rubin

386
Neptun

396
Agaline

380
Prison

384
Updoor

394
Nix

402
Universal Line





Features

Atena

Industrial luminaires aimed at ceiling or hanging mounting. Rectangular casting made of aluminum sheet. Only one colour available: RAL 9005 (black). Upon client request, there is a possibility to make luminaires with a longer size than standard ones'. Consequently, the luminaire will have bigger luminous flux. The light sources are protected by a diffuser made of tempered glass and the whole construction is characterised by a high protection level against dust and water. Available accessories: electrical connectors of IP65 and clip for the hanging version. The product is recommended for production halls, warehouses and heavy industry.

Atena Line

Surface mounted LED luminary. Luminary body made from steel sheet, powder coated in white. Luminary 40 J impact resistant. Luminary recommended for rooms with vandal and humidity hazards.



Consult for dimming options.

Standard finishes

Add needed finish to complete the product reference.



Installation: Ceiling /Suspended


LED personalisation

Check all types of LEDs on guide's page 23


Atena Compact

CRI ≥70	100000h L70B10
------------	-------------------


Body: Die-cast aluminum
Diffuser: PC (opalescent polycarbonate)



Lm	K		Code
15750	4000	60°	19.3210.0001
15560	4000	90°	19.3210.0002
16100	4000	120°	19.3210.0003



Lm	K		Code
23700	4000	60°	19.3210.0004
23157	4000	90°	19.3210.0005
24150	4000	120°	19.3210.0006



Lm	K		Code
31800	4000	60°	19.3210.0007
31200	4000	90°	19.3210.0008
32272	4000	120°	19.3210.0009

Atena

Industrial

Indoor

Atena Line

CRI ≥80	83000h L90B10
-------------------	------------------

Body: Aluminium
Diffuser: SH (transparent hardened glass)



83 W Rotary Holder

Lm	K		Code
10057	4000	60°	19.3138.0004
9347	4000	105°	19.3138.0006
8713	4000	80+54°	19.3138.0020

124 W Rotary Holder

124 W

Lm	K		Code
15085	4000	60°	19.3138.0010
14020	4000	105°	19.3138.0012
13070	4000	80+54°	19.3138.0024

Lm	K		Code
15085	4000	60°	19.3125.0002
15440	4000	95°	19.3125.0004
14020	4000	105°	19.3125.0006



165 W Rotary Holder

Lm	K		Code
20114	4000	60°	19.3138.0016
18694	4000	105°	19.3138.0018
17426	4000	80+54°	19.3138.0028

165 W

Lm	K		Code
20114	4000	60°	19.3125.0008
20587	4000	95°	19.3125.0010
18694	4000	105°	19.3125.0012



206 W

Lm	K		Code
25143	4000	60°	19.3125.0014
25734	4000	95°	19.3125.0016
23368	4000	105°	19.3125.0018




249 W

Lm	K		Code
30171	4000	60°	19.3125.0020
30881	4000	95°	19.3125.0022
28041	4000	105°	19.3125.0024



203 W Rotary Holder


Lm	K		Code
22103	4000	80+54°	19.3138.0032




249 W Rotary Holder

Lm	K		Code
26139	4000	80+54°	19.3138.0036

Atena Line Industry




Body: Aluminium
Diffuser: SH (transparent hardened glass)




116 W

Lm	K		Code
14578	5000	60°	19.3126.0001
14921	5000	95°	19.3126.0002
13549	5000	105°	19.3126.0003




151 W

Lm	K		Code
18952	5000	60°	19.3126.0004
19398	5000	95°	19.3126.0005
17614	5000	105°	19.3126.0006



195 W

Lm	K		Code
24491	5000	60°	19.3126.0007
25068	5000	95°	19.3126.0008
22763	5000	105°	19.3126.0009



233 W

Lm	K		Code
29157	5000	60°	19.3126.0010
29843	5000	95°	19.3126.0011
27099	5000	105°	19.3126.0012





Atena

Industrial

Indoor

LUXIONA troll

Prison by Luxiona Designers N



Features

LED luminaire for surface mounting. Body made of steel sheet, finish in white. Antivandalism waterproof luminaire, highly resistant against impacts.

		IP 65	IK 10
	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
------------------------	--------------	-------------


Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Steel sheet
Diffuser: PC (opalescent polycarbonate)

Installation: Ceiling / Surface

17
W28
W



Lm	K		Code
1846	4000	110°	19.3133.0001

Lm	K		Code
3018	4000	110°	19.3133.0004

17
W28
W



Lm	K		Code
1846	4000	110°	19.3133.0002

Lm	K		Code
3018	4000	110°	19.3133.0005

34
W56
W


Lm	K		Code
3692	4000	110°	19.3133.0007

Lm	K		Code
6037	4000	110°	19.3133.0010

34
W56
W

Lm	K		Code
3692	4000	110°	19.3133.0009

Lm	K		Code
6037	4000	110°	19.3133.0012

68
W83
W

Lm	K		Code
7384	4000	110°	19.3133.0013

Lm	K		Code
9055	4000	110°	19.3133.0014



Features

Luminaire for surface mounting, specifically indicated for sports facilities with impact risk. With a protective grid of steel wire, PMMA diffuser and finish in white.
Optional with PC diffuser not requiring protective grille.

CE

IK
10

LED

CRI
≥80

SDCM
3

100000h
L80B10

DRIVER
INCL.

220
240 V

50
60 Hz

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser:
(1) Micro-PRM (micro-prismatic diffuser PMMA) with metallic grid
(2) PC strong without metallic grid
(3) PC-T Micro-PRM without metallic grid

Installation: Ceiling / Surface


Rubin Sport New




114
W



Lm	K	Diffuser	IP		Code
12495	4000	(1)	20	95°	19.3135.0006
9996	4000	(2)	20	110°	19.3135.0009
11490	4000	(3)	44	95°	19.3135.0012



171
W




Lm	K	Diffuser	IP		Code
18742	4000	(1)	20	95°	19.3135.0016
14994	4000	(2)	20	110°	19.3135.0019
17236	4000	(3)	44	95°	19.3135.0022

228
W

Lm	K	Diffuser	IP		Code
24990	4000	(1)	20	95°	19.3135.0026
19992	4000	(2)	20	110°	19.3135.0029
22981	4000	(3)	44	95°	19.3135.0032

Rubin Industry Slight



57
W




Lm	K		IP	Code
6247	4000	95° 20		19.3135.0002

Rubin

Industrial

Indoor

LUXIONA troll

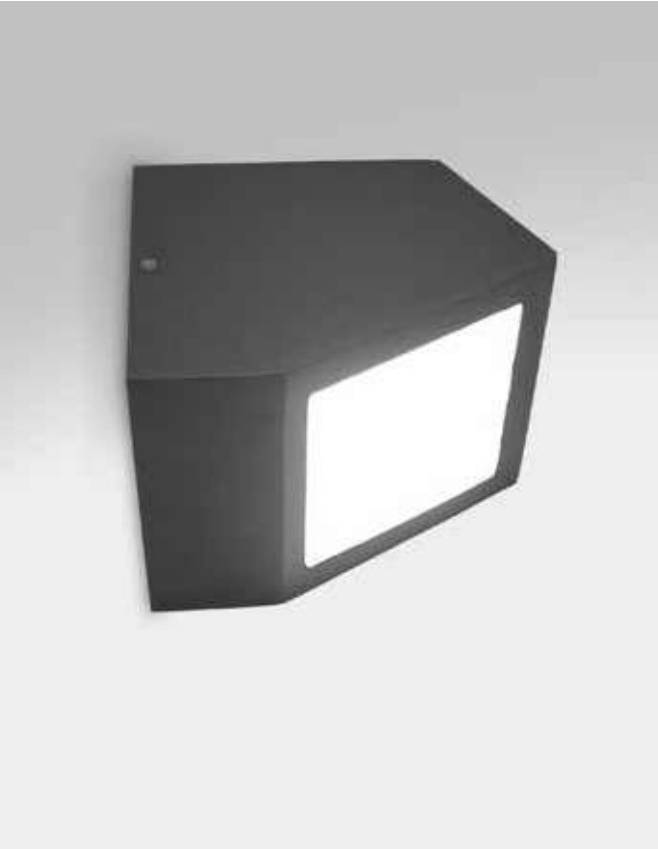

Features

Luminaire made of steel sheet, powder coated with different finish options. Recommended for facilities with low temperatures until -25°-

CE		IP 65	IK 08
LED	CRI ≥80	SDCM 2	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Consult for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Steel sheet
Diffuser: PC (opalescent polycarbonate)

Installation: Wall / Surface

LED personalisation
Check all types of LEDs on guide´s page 23



14
W

Lm	K	Beam Angle	Code
1294	4000	105°	19.3137.0001

Outdoor

Industrial

Indoor

LUXIONA troll



Features

Neptune V2 / compact:
narrow format luminaires with high performance IP65 LED sources characterized by their compactness and an extremely easy and quick installation. An optimised diffuser, slightly matt, improves the luminaires' lighting efficiency compared to similar products. It is excellent for damp and dusty rooms such as halls, warehouses, underground passages, parking lots, etc.

Neptune GRP
The luminaires cast is made of polyester reinforced by fire-resistant glass fibre in light gray colour (RAL 7035). Application of this material ensures resistance to thermal, mechanical and chemical agents activity. Opalized diffuser is made of PMMA and is installed in luminaires body indelibly by using special adhesive sealant. This way of connection guarantees resistance against dust and water penetration to inside of the luminaire. The material which luminaire is made of and the way it is bonded ensures the resistance to chemical substances used in food industry.

CE

IK
10

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options. (Only Neptun Grp)

Standard finishes
Add needed finish to complete the product reference.

Installation: Wall / Ceiling / Suspended / Surface




LED personalisation
Check all types of LEDs on guide´s page 23
(Only Neptun Grp)

Neptun V2

IP 66	100000h L80B10
----------	-------------------

Body: Polycarbonate
Diffuser: PC (frozen polycarbonate)



7 W	ON/ OFF
--------	------------

Lm	K		Code
1067	3000	120°	19.3208.0009
1189	4000	120°	19.3208.0010

7 W	
--------	--


Lm	K		Code
1067	3000	120°	19.3208.0011
1189	4000	120°	19.3208.0012

12 W	ON/ OFF
---------	------------

Lm	K		Code
1868	3000	120°	19.3208.0001
2081	4000	120°	19.3208.0002

12 W	
---------	--

Lm	K		Code
1868	3000	120°	19.3208.0003
2081	4000	120°	19.3208.0004




25 W	ON/ OFF
---------	------------

Lm	K		Code
3737	3000	120°	19.3208.0005
4163	4000	120°	19.3208.0006

25 W	
---------	--

Lm	K		Code
3737	3000	120°	19.3208.0007
4163	4000	120°	19.3208.0008



53 W	ON/ OFF
---------	------------

Lm	K		Code
7522	3000	120°	19.3206.0013
7905	4000	120°	19.3206.0014

53 W	
---------	--


Lm	K		Code
7522	3000	120°	19.3206.0015
7905	4000	120°	19.3206.0016

60 W	ON/ OFF
---------	------------

Lm	K		Code
8595	3000	120°	19.3206.0017
9034	4000	120°	19.3206.0018

60 W	
---------	--

Lm	K		Code
8595	3000	120°	19.3206.0019
9034	4000	120°	19.3206.0020



30 W	ON/ OFF
---------	------------

Lm	K		Code
4298	3000	120°	19.3206.0005
4517	4000	120°	19.3206.0006

30 W	
---------	--

Lm	K		Code
4298	3000	120°	19.3206.0007
4517	4000	120°	19.3206.0008

38 W	ON/ OFF
---------	------------

Lm	K		Code
5373	3000	120°	19.3206.0009
5646	4000	120°	19.3206.0010

38 W	
---------	--

Lm	K		Code
5373	3000	120°	19.3206.0011
5646	4000	120°	19.3206.0012

Neptun

Industrial


Indoor

LUXIONA troll

Neptun V2

IP	100000h
66	L80B10

Body: Polycarbonate
Diffuser: PC (frozen polycarbonate)




38 W	ON/ OFF
---------	------------

Lm	K		Code
5372	3000	120°	19.3204.0005
5647	4000	120°	19.3204.0006

38 W	
---------	--

Lm	K		Code
5372	3000	120°	19.3204.0007
5647	4000	120°	19.3204.0008



47 W	ON/ OFF
---------	------------

Lm	K		Code
6715	3000	120°	19.3204.0009
7060	4000	120°	19.3204.0010

47 W	
---------	--

Lm	K		Code
6715	3000	120°	19.3204.0011
7060	4000	120°	19.3204.0012

66 W	ON/ OFF
---------	------------

Lm	K		Code
9400	3000	120°	19.3204.0013
9882	4000	120°	19.3204.0014


66 W	
---------	--

Lm	K		Code
9400	3000	120°	19.3204.0015
9882	4000	120°	19.3204.0016

Neptun Compact

IP 66	70000h L80B10
----------	------------------

Body: Polycarbonate
Diffuser: PC (frozen polycarbonate)



11 W	ON/ OFF
---------	------------

Lm	K		Code
1461	3000	120°	19.3207.0009
1521	4000	120°	19.3207.0010

11 W	
---------	--

Lm	K		Code
1461	3000	120°	19.3207.0011
1521	4000	120°	19.3207.0012

17 W	ON/ OFF
---------	------------

Lm	K		Code
2164	3000	120°	19.3207.0001
2252	4000	120°	19.3207.0002

17 W	
---------	--

Lm	K		Code
2164	3000	120°	19.3207.0003
2252	4000	120°	19.3207.0004




28 W	ON/ OFF
---------	------------

Lm	K		Code
3681	3000	120°	19.3207.0005
3830	4000	120°	19.3207.0006

28 W	
---------	--

Lm	K		Code
3681	3000	120°	19.3207.0007
3895	4000	120°	19.3207.0008



17 W	ON/ OFF
---------	------------

Lm	K		Code
2228	3000	120°	19.3205.0001
2347	4000	120°	19.3205.0002

17 W	
---------	--

Lm	K		Code
2228	3000	120°	19.3205.0003
2347	4000	120°	19.3205.0004

28 W	ON/ OFF
---------	------------

Lm	K		Code
3492	3000	120°	19.3205.0005
3662	4000	120°	19.3205.0006

28 W	
---------	--

Lm	K		Code
3492	3000	120°	19.3205.0007
3662	4000	120°	19.3205.0008

39 W	ON/ OFF
---------	------------

Lm	K		Code
4963	3000	120°	19.3205.0009
5166	4000	120°	19.3205.0010

39 W	
---------	--

Lm	K		Code
4963	3000	120°	19.3205.0011
5166	4000	120°	19.3205.0012



55 W	ON/ OFF
---------	------------

Lm	K		Code
7360	3000	120°	19.3205.0013
7661	4000	120°	19.3205.0014


49 W	
---------	--

Lm	K		Code
7360	3000	120°	19.3205.0015
7661	8238	120°	19.3205.0016

Neptun Compact

IP 66	70000h L80B10
----------	------------------

Body: Polycarbonate
Diffuser: PC (frozen polycarbonate)




38 W	ON/ OFF
---------	------------

Lm	K		Code
4713	3000	120°	19.3203.0001
4954	4000	120°	19.3203.0002

38 W	
---------	--

Lm	K		Code
4713	3000	120°	19.3203.0003
4954	4000	120°	19.3203.0004



57 W	ON/ OFF
---------	------------

Lm	K		Code
7071	3000	120°	19.3203.0009
7432	4000	120°	19.3203.0010

57 W	
---------	--

Lm	K		Code
7071	3000	120°	19.3203.0011
7432	4000	120°	19.3203.0012

81 W	ON/ OFF
---------	------------

Lm	K		Code
9899	3000	120°	19.3203.0005
10405	4000	120°	19.3203.0006


81 W	
---------	--

Lm	K		Code
9899	3000	120°	19.3203.0007
10405	4000	120°	19.3203.0008

Neptun Grp

IP 65	70000h L80B10
----------	------------------

Body: Polyester reinforced by fire-resistant glass fibre
Diffuser: PMMA opal



28 W	ON/ OFF
---------	------------

Lm	K		Connections	Code
3993	4000	115°	B1/C1	19.3128.0001
3993	4000	115°	B1/C2	19.3128.0002
3993	4000	115°	B1/C3	19.3128.0003
3993	4000	115°	B2/C1	19.3128.0004
3993	4000	115°	B2/C2	19.3128.0005
3993	4000	115°	B3/C1	19.3128.0006
3993	4000	115°	B3/C2	19.3128.0007

56 W	ON/ OFF
---------	------------

Lm	K		Connections	Code
7987	4000	115°	B1/C1	19.3128.0008
7987	4000	115°	B1/C3	19.3128.0009
7987	4000	115°	B2/C1	19.3128.0010
7987	4000	115°	B3/C1	19.3128.0011

Connections



B1: 1.5 m output power cable.

B2: 1.5 m output power cable + quick coupler.

B3: Quick couplings.



C1: Ceiling or rope mounting with clips (hook not included).




C2: Rail mounting with screws.




C3: Installation on hooked ropes



Tram Depot. Szczecin, Poland

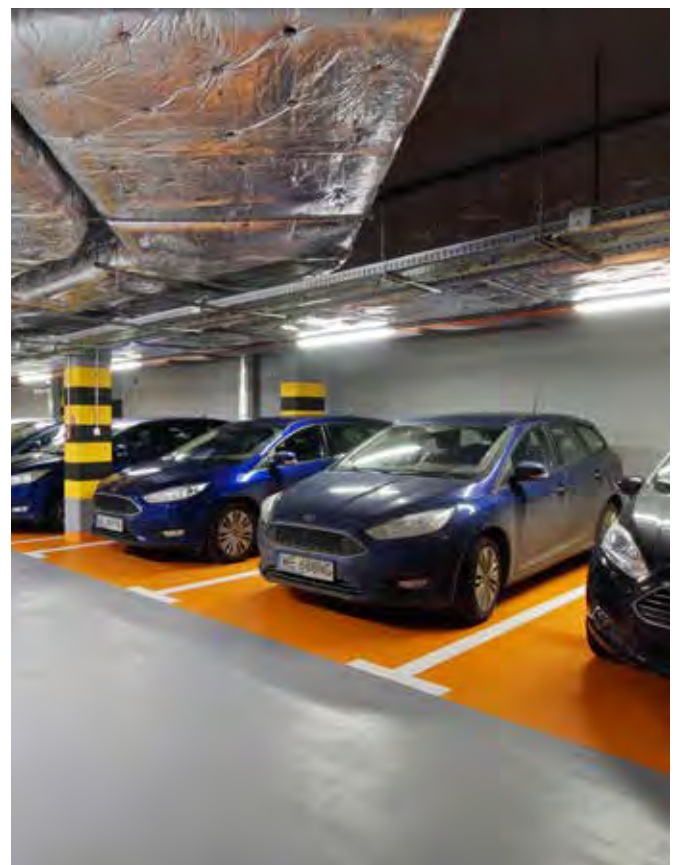

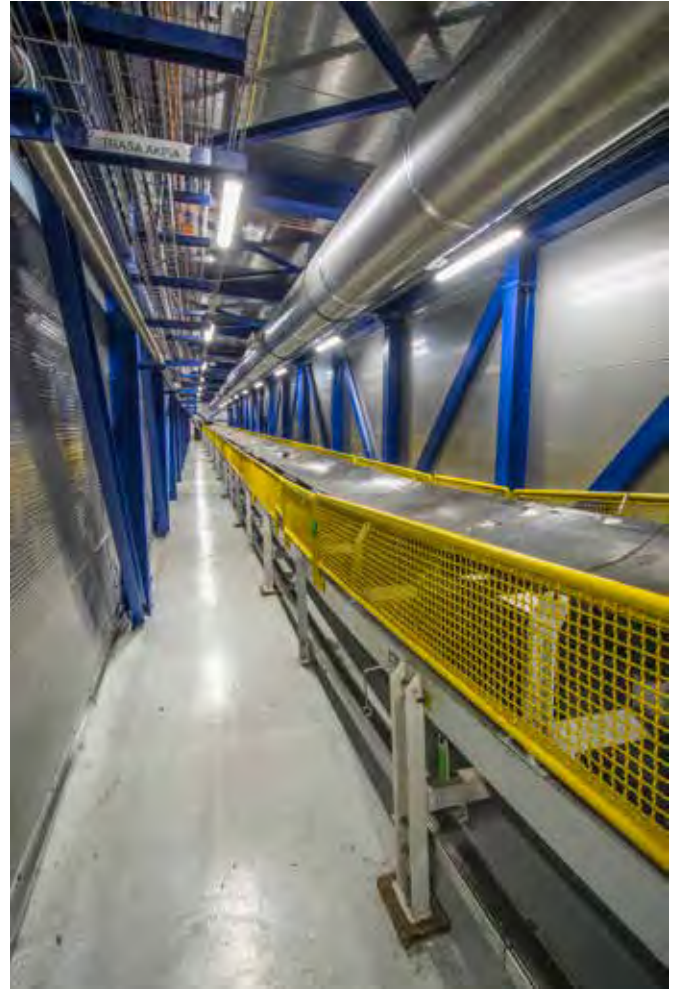

Nitrogen Plant. Puławy, Poland

Nix



Features

Nix is a range of waterproof LED shades with multiple installation possibilities, to be placed on walls and ceilings or suspended. These luminaires are specifically indicated to light up premises where a high environmental protection is necessary: high levels of humidity, pollution and impact risks.

CE		IP 65	IK 10	 850°	DRIVER INCL.	220 240 V	50 60 Hz
LED	CRI ≥80	SDCM 3	50000h L70B10				

Consult for dimming options.


Standard finishes
Add needed finish to complete the product reference.

Body: Polycarbonate
Diffuser: Opal



Installation: Wall / Ceiling / Surface





L=600



Lm	K	Beam	Code
1298	4000	120°	11.0030.1411



Lm	K	Beam	Code
1298	4000	120°	11.0030.1412



Lm	K	Beam	Code
1298	4000	120°	11.0030.1413



Lm	K	Beam	Code
1298	4000	120°	11.0030.1414



Lm	K	Beam	Code
2954	4000	120°	11.0030.1401




Lm	K	Beam	Code
2954	4000	120°	11.0030.1402



Lm	K	Beam	Code
2954	4000	120°	11.0030.1403



Lm	K	Beam	Code
2954	4000	120°	11.0030.1404



L=1200



Lm	K	Beam	Code
3141	4000	120°	11.0030.2411



Lm	K	Beam	Code
3141	4000	120°	11.0030.2412



Lm	K	Beam	Code
3141	4000	120°	11.0030.2413



Lm	K	Beam	Code
3141	4000	120°	11.0030.2414



Lm	K	Beam	Code
5895	4000	120°	11.0030.2401




Lm	K	Beam	Code
5895	4000	120°	11.0030.2402



Lm	K	Beam	Code
5895	4000	120°	11.0030.2403



Lm	K	Beam	Code
5895	4000	120°	11.0030.2404



L=1500



Lm	K	Beam	Code
3897	4000	120°	11.0030.3411



Lm	K	Beam	Code
3897	4000	120°	11.0030.3412



Lm	K	Beam	Code
3897	4000	120°	11.0030.3413



Lm	K	Beam	Code
3897	4000	120°	11.0030.3414



Lm	K	Beam	Code
7123	4000	120°	11.0030.3401



Lm	K	Beam	Code
7123	4000	120°	11.0030.3402



Lm	K	Beam	Code
7123	4000	120°	11.0030.3403



Lm	K	Beam	Code
7123	4000	120°	11.0030.3404

Agaline

by Luxiona Designers

Agaline

Agaline 3R



Features

Agaline is an industrial modular system for linear installation. Agaline is an excellent option to light up industrial premises and warehouses, also suitable for offices, supermarkets and commercial spaces. A luminaire mounted in line systems, made of steel sheet, painted in white. Through-cabling ensures easy and fast installation.

Agaline 3R is a linear luminaire to be installed individually. It provides a great variety of optics that allow to arrange its light flux in different ways. To be applied in industrial objects and other places, where high intensity and lighting evenness are necessary.

CE

IK
04

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Standard finishes

Add needed finish to complete the product reference.



Other finishes

Ask us for custom colours.

Body: Steel sheet

Installation: Ceiling / Suspended

IP	100000h
20	L80B10


Diffuser: None / PLX (PMMA opal)



Diffuser: None

Diffuser: PLX (PMMA opal)

Diffuser: None





Lm	K		Code
4081	4000	115°	19.3120.0001



Lm	K		Code
8163	4000	115°	19.3120.0005

Diffuser: PLX (PMMA opal)



Lm	K		Code
3998	4000	120°	19.3120.0002



Lm	K		Code
7996	4000	120°	19.3120.0007




Lm	K		Code
3373	4000	110°	19.3120.0003



Lm	K		Code
6747	4000	110°	19.3120.0009

Diffuser: None





Lm	K		Code
8163	4000	115°	19.3120.0004



Lm	K		Code
16326	4000	115°	19.3120.0013

Diffuser: PLX (PMMA opal)



Lm	K		Code
7996	4000	120°	19.3120.0006



Lm	K		Code
15993	4000	120°	19.3120.0015



Lm	K		Code
6747	4000	110°	19.3120.0008



Lm	K		Code
13494	4000	110°	19.3120.0017

Agaline

Industrial

Indoor

LUXIONA troll


Agaline



Diffuser: None

Diffuser: PLX (PMMA opal)

Diffuser: None





86
W

Lm	K		Code
12245	4000	115°	19.3120.0010

171
W

Lm	K		Code
24990	4000	115°	19.3120.0022

Diffuser: PLX (PMMA opal)



86
W

Lm	K		Code
11995	4000	120°	19.3120.0011

171
W

Lm	K		Code
23990	4000	120°	19.3120.0023


86
W

Lm	K		Code
10120	4000	110°	19.3120.0012

171
W

Lm	K		Code
20241	4000	110°	19.3120.0024

Diffuser: None





114
W

Lm	K		Code
16326	4000	115°	19.3120.0014

228
W

Lm	K		Code
32653	4000	115°	19.3120.0025

Diffuser: PLX (PMMA opal)



114
W

Lm	K		Code
15993	4000	120°	19.3120.0016

228
W

Lm	K		Code
31987	4000	120°	19.3120.0026

114
W

Lm	K		Code
13494	4000	110°	19.3120.0018

228
W

Lm	K		Code
26989	4000	110°	19.3120.0027


Agaline



Diffuser: None

Diffuser: PLX (PMMA opal)

Diffuser: None





Lm	K		Code
20408	4000	115°	19.3120.0019



Lm	K		Code
40817	4000	115°	19.3120.0028

Diffuser: PLX (PMMA opal)



Lm	K		Code
19992	4000	120°	19.3120.0020



Lm	K		Code
39984	4000	120°	19.3120.0029



Lm	K		Code
16868	4000	110°	19.3120.0021



Lm	K		Code
33736	4000	110°	19.3120.0030

Accessories

0E1ALLS-SPM
Reflector aligner

6E1-500KW34K-3
Suspension with 3-pole power
supply type A+B. Length: 1.5 m

0E1ALLS-SP
Agaline Module Aligner

6E1-500KWB34K-3
Suspension with 3-pole power
supply type A+E. Length: 1.5 m

0E1ALLS-CPO
Cover for Agaline

6E1-8670-B-1,5
Suspension type E without power
supply. Length: 1.5 m

Agaline

Industrial


Indoor

LUXIONA troll

Agaline 3R


IP 65	54000h L80B10
----------	------------------

Body: Steel sheet
Diffuser: OPTICS (optical system based on lenses)




78
W

Lm	K	Beam Angle	Code
10620	4000	70°	19.3121.0001
10785	5000	70°	19.3121.0002
10620	4000	44-83°	19.3121.0003
10785	5000	44-83°	19.3121.0004




104
W

Lm	K	Beam Angle	Code
14160	4000	70°	19.3121.0005
14380	5000	70°	19.3121.0006
14160	4000	44-83°	19.3121.0007
14380	5000	44-83°	19.3121.0008



131
W

Lm	K	Beam Angle	Code
17700	4000	70°	19.3121.0009
17975	5000	70°	19.3121.0010
17700	4000	44-83°	19.3121.0011
17975	5000	44-83°	19.3121.0012



157
W

Lm	K	Beam Angle	Code
21240	4000	70°	19.3121.0013
21570	5000	70°	19.3121.0014
21240	4000	44-83°	19.3121.0015
21570	5000	44-83°	19.3121.0016



Universal Line N



Features

Surface mounted luminaires with highly efficient LED. Luminaire body made of extruded aluminium, anodized. Microprismatic diffusers. Universal Line industrial models have IP65 level of protection and are designed for their use indoors. They may be directly installed on ceiling or suspended, with the corresponding accessories. Versions for lines with fast modular-connection systems are available, as well as outdoor versions (on order).

These models' LED engines are made to bear temperatures between -25° and 40 ° C. Luminaires are IP55 and must be installed on ceiling horizontally, protected from direct sunlight. They are not designed neither made to be installed on wall or as uplights.

CE		IP 65	IK 04
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminum
Diffuser: PLX (PMMA opal)

Installation: Ceiling / Suspended / Surface


Also available on other typology_page 318

28
W

Lm	K		Code
3483	4000	110°	19.3127.0037

53
W


Lm	K		Code
6247	4000	110°	19.3127.0042

56
W

Lm	K		Code
6966	4000	110°	19.3127.0047

106
W

Lm	K		Code
12495	4000	110°	19.3127.0051





N= 1, 2, 3...



Line EL

Line S

Line EP

28
W28
W28
W

Lm	K		Code
3483	4000	110°	19.3127.0038

Lm	K		Code
3483	4000	110°	19.3127.0040


Lm	K		Code
3483	4000	110°	19.3127.0039

53
W53
W53
W




Lm	K		Code
6247	4000	110°	19.3127.0043


Lm	K		Code
6247	4000	110°	19.3127.0045

Lm	K		Code
6247	4000	110°	19.3127.0044



N= 1, 2, 3...

Line EL					Line S					Line EP				
														
2288					2288					2288				
56 W					56 W					56 W				
Lm	K		Code		Lm	K		Code		Lm	K		Code	
6966	4000	110°	19.3127.0048		6966	4000	110°	19.3127.0050		6966	4000	110°	19.3127.0049	
106 W					106 W					106 W				
Lm	K		Code		Lm	K		Code		Lm	K		Code	
12495	4000	110°	19.3127.0052		12495	4000	110°	19.3127.0054		12495	4000	110°	19.3127.0053	

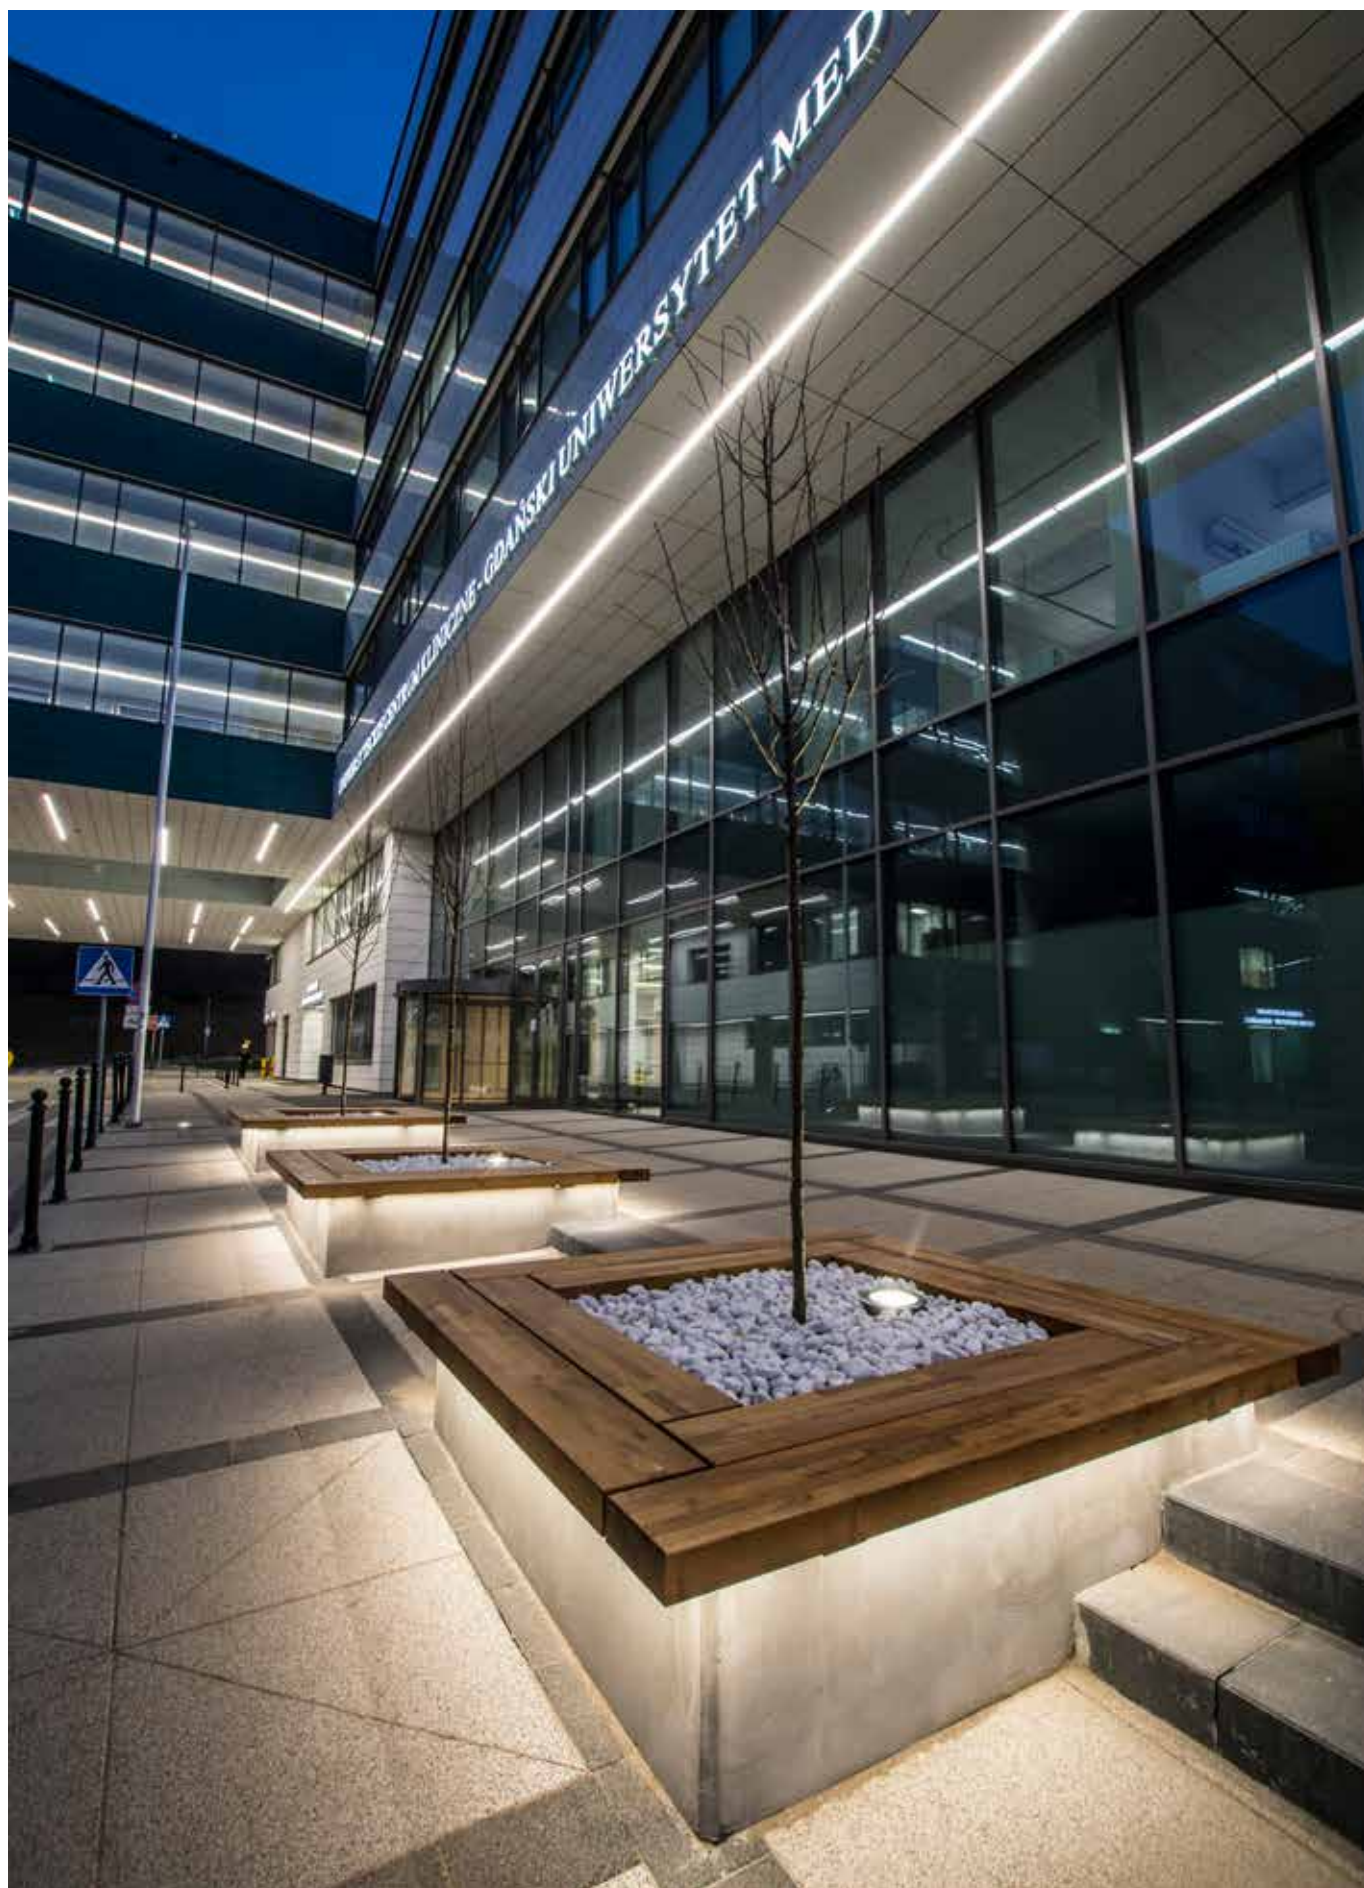

Non-invasive Medicine Center. Gdańsk, Poland

Universal Line

Industrial

Indoor

LUXIONA troll

Outdoor / Projectors

408
Ledmotiv

412
Beam

418
Single

410
Fasad

416
Fargo



Features

Body made of die-cast aluminium with a specific treatment that ensures and excellent performance outdoors. It sets up PMMA lenses, silicone gaskets and steel screws that secure IP65 degree of protection. Protection tempered glass. It is available for 5 different optics to be used in accordance with its application: landscaped areas, pedestrian areas, residential areas, public spaces, facades and vertical planes, signs and advertising elements, patios or terraces.

CE

IP
66

IK
08

90°

LED

CRI
≥80

SDCM
3

50000h
L70B10

ON/
OFF

220
230 V

50
60 Hz

Consult us for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Other finishes
Ask us for custom colours.

Body: Aluminium

Installation: Wall / Ceiling / Floor / Surface

LED personalisation
Check all types of LEDs on guide´s page 23




21
W

Lm	K		Code
1328	3000	9°	11.1673.3311
1328	3000	20°	11.1673.3312
1141	3000	30°	11.1673.3313
1141	3000	45°	11.1673.3314
1194	3000	Asym 45° + 35°	11.1673.3316

Led motive

Projectors

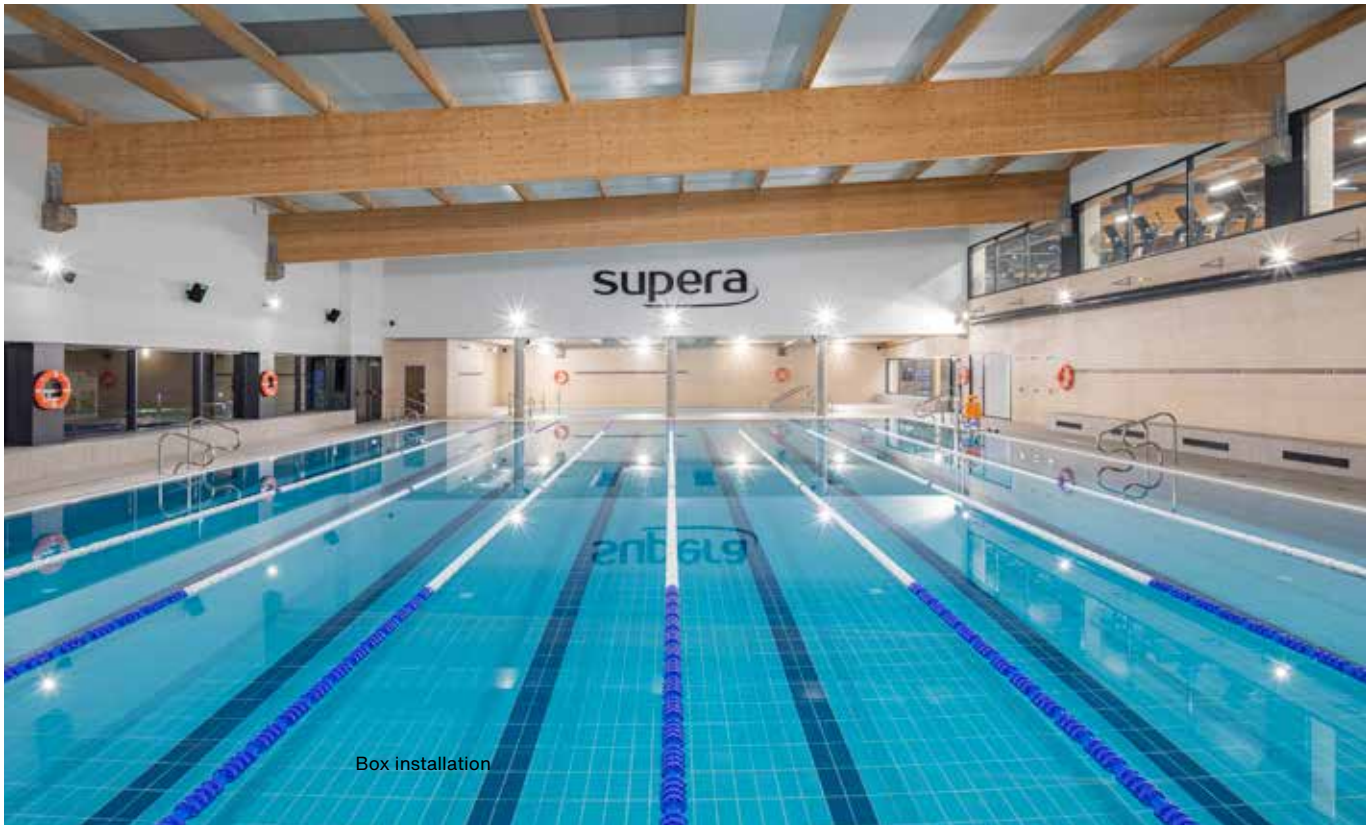

Sports Center Supera de Rivas, Madrid. Spain @Alex Fernández Photography

Outdoor

LUXIONA troll



Features

Weather proof powder painted aluminum casting. Clear stainless steel diffuser. The luminaire is equipped with an adjustment allowing proper light flux operation. LED panels are applied as light sources. Recommended for walls and solid bases. Fasad Wall LED is intended illuminate walls of architectural objects (4).

CE		IP 65	IK 09
LED	CRI ≥80	SDCM 3	10000h L80B10

ON/ OFF	220 240 V	50 60 Hz
------------	--------------	-------------

Consult us for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium
Diffuser: SH (transparent hardened glass)

Installation: Wall / Ceiling / Floor / Surface

Also available on other typology_page 468

LED personalisation
Check all types of LEDs on guide´s page 23





4
W

Lm	K		Code
667	4000	66-95°	19.3144.0002
631	4000	52-95°	19.3144.0004
603	4000	30-114°	19.3144.0006



7
W

Lm	K		Code
1091	4000	66-95°	19.3144.0008
1033	4000	52-95°	19.3144.0010
986	4000	30-114°	19.3144.0012



14
W

Lm	K		Code
2182	4000	66-95°	19.3144.0014
2066	4000	52-95°	19.3144.0016
1973	4000	30-114°	19.3144.0018



28
W

Lm	K		Code
4365	4000	66-95°	19.3144.0020
4133	4000	52-95°	19.3144.0022
3947	4000	30-114°	19.3144.0024

Accessories



0E1FWLBOXD1
Box driver 1x

0E1FWLBOXD2
Box driver 2x

0E1FWLBOXD3
Box driver 3x

0E1FWLBOXD4
Box driver 4x

Fasad

Projectors

Outdoor

LUXIONA troll

Beam

Beam
Beam Pool N



Features


Beam

Beam is a LED spotlight designed to create light atmospheres outdoors with minimum energy usage. Excellent solution to light up landscaped areas, patios and facades. Body made of die-cast aluminium , anthracite-grey painted for outdoors. It includes 4mm tempered glass and is supplied with 1.5m long connection cable. It is available with 20° or 40° optics, of 3000K and 4000K.

Beam Pool

Body made of SUS 316L chrome stainless steel with silicone gaskets and an 8mm PMMA diffuser. It is supplied with 3m long connection cable and powered at 24V by remote drivers. To be directly installed on ground or wall surfaces submerged in fountains (68).

Beam





Standard finishes

Add needed finish to complete the product reference.

Body: Die-cast aluminium



Installation: Wall / Ceiling / Floor / Surface




Lm ▲ Code
1483 RGB 30° 11.1606.4881

Beam


IP	IK	CRI	SDCM
65	08	≥80	3

DRIVER	220 V	50 Hz
INCL.	240 V	60




7 W

Lm	K	Beam angle	Code
359	3000	20°	11.1606.1831
304	3000	45°	11.1606.1832
410	4000	20°	11.1606.1841
338	4000	45°	11.1606.1842



14 W

Lm	K	Beam angle	Code
777	3000	20°	11.1606.2831
652	3000	45°	11.1606.2832
882	4000	20°	11.1606.2841
736	4000	45°	11.1606.2842



20 W

Lm	K	Beam angle	Code
1565	3000	20°	11.1606.3831
1338	3000	45°	11.1606.3832
1704	4000	20°	11.1606.3841
1416	4000	45°	11.1606.3842

Beam

Projectors

Outdoor

Accesorios



11.1606.0001.22
Base for stake in polyamide
L= 210 mm. For 6W



11.1655.0001.00
Master. RGBW, RGB, TW
controller



11.1655.0002.00
RGB & RGBW touch panel



11.1655.0003.00
RGB & RGBW remote control

11.1606.0002.22
Base for stake in polyamide
L= 308 mm. For 12W/18W

11.1655.0004.00
Slave. RGBW, RGB, TW
controller

11.1801.7011.00
24V power supply for 60W

LUXIONA troll

Beam

Beam Pool N

CE

IP
68

IK
08

90°

LED

CRI
≥80

SDCM
3

50000h
L70B10

DRIVER
INCL


24
VDC

Standard finishes
Add needed finish to complete the product reference.

Body: SUS 316L



Installation: Floor/ Wall (always underwater)



7,7
W

Lm	K		Code
687	3000	9°	11.1606.6311
661	3000	30°	11.1606.6313





Beam

Projectors

Outdoor

LUXIONA **troll**



Features

Fargo is an industrial LED spotlight to be applied indoors or outdoors, suitable for areas of difficult access, facades, fences or roofs. The materials it is made of are weatherproof. Body of injected aluminium, glass front. To be surface mounted on walls, ceilings or even surfaces.

CE		IP 65	IK 08	 850°	 90°
LED	CRI ≥80	50000h L70B10			


DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium

Installation: Wall / Ceiling / Floor / Surface




10
W

Lm	K		Code
1190	4000	120°	11.5100.2411




30
W

Lm	K		Code
3589	4000	120°	11.5100.2431




50
W

Lm	K		Code
6330	4000	120°	11.5100.2441




100
W

Lm	K		Code
12830	4000	120°	11.5100.2451



150
W

Lm	K		Code
18464	4000	120°	11.5100.2461



204
W

Lm	K		Code
25658	4000	120°	11.5100.2471

Fargo

Projectors

Outdoor

LUXIONA troll

Single

Single
Single Pool 



Features

Single

Small size LED retrofit spotlight. Excellent for focused and adjusted lighting. It is intended to enhance beauty by providing light.

Single Pool

Body made of SUS 316L chrome stainless steel with silicone gaskets and an 8mm PMMA diffuser. It is supplied with 3m long connection cable and powered at 24V by remote drivers. To be directly installed on ground or wall surfaces submerged in fountains (68).

Single





IP

66

IK

04



90°

DRIVER

INCL.

220

230

V

50

60

Hz


Light source not included
Light source GU10 LED

Standard finishes
Add needed finish to complete the product reference.

Body: Aisi 316L

.25



Installation: Wall / Ceiling / Floor / Pole / Surface



15
W

Lamp Holder	Code
GU 10	11.0779.0001

Spike included







Standard finishes
Add needed finish to complete the product reference.

Body: Aluminium



Installation: Wall / Ceiling / Floor / Surface





Lm	K	Beam Angle	Code
1039	3000	15°	11.0779.1311
915	3000	24°	11.0779.1321
980	3000	36°	11.0779.1331
890	3000	60°	11.0779.1341

K	Beam Angle	Code
3000	15°	11.0779.5311
3000	24°	11.0779.5321
3000	36°	11.0779.5331
3000	60°	11.0779.5341

K	Beam Angle	Code
3000	15°	11.0779.3311
3000	24°	11.0779.3321
3000	36°	11.0779.3331
3000	60°	11.0779.3341

K	Beam Angle	Code
3000	15°	11.0779.4311
3000	24°	11.0779.4321
3000	36°	11.0779.4331
3000	60°	11.0779.4341

Single Pool





Standard finishes
Add needed finish to complete the product reference.

Body: SUS 316L



Installation: Floor/ Wall (always underwater)



Lm	K	Beam Angle	Code
138	3000	9°	11.0779.2311
132	3000	30°	11.0779.2313

Single

Projectors

Outdoor

LUXIONA troll

Outdoor / Poles

422
Riddle

430
Streetpark

424
Kubik Pole

436
Filar

Riddle by Jean Nouvel



The references incorporate a 3.5 metre high cylindrical galvanised and painted column.

Features

Riddle is a design with which Jean Nouvel tries to simulate the effect of solar light seeping through vegetation. These spherical luminaires create light and shadow effects, for urban or private outdoor lighting. Their sphere-shaped perforated design lends them a peculiar character which is different from that of any

other existing luminaire. With its sculptural design, they ennoble landscape during the day and enclose it in enigma at night. Great formal design lamps with a minimalist and appealing light distribution, at the same time they provide practical and distinctive lighting degrees.

CE

IP
65

IK
10

LED

CRI
≥80

SDCM
3

60000h
L80B10

ON/
OFF

220
240 V

50
60 Hz


Standard finishes
Add needed finish to complete the product reference.



Body: Injected aluminum


Installation: Pole

Also available on other typology_page 440, 498



49
W

Lm	K		Code
6800	3000	120°	11.6601.2083
7200	4000	120°	11.6601.2084




2x49
W

Lm	K		Code
2 x 6800	3000	120°	11.6602.2083
2 x 7200	4000	120°	11.6602.2084



Features

Outdoor luminaire for assembly on a hardened surfaces (concrete, sett, or basement) equipped with newest generation power-saving LED sources. It is intended to illuminate pedestrian routes such as park alleys, parking spaces, communication routes, estate entrances. Luminaire body coated with facade paint for outdoor use, light sources placed in upper part of the luminaire with an asymmetric lens that provides illumination of the area. IP65 hermetic luminaire, IK09 impact resistant.



Consult us for dimming options.

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.

Body: Aluminium
Diffuser: Transparent polycarbonate

Also available on other typology_page 442, 518

LED personalisation
Check all types of LEDs on guide´s page 23

Kubik Pole


CRI ≥80	IK 09	80000h L80B10
------------	----------	------------------



Installation: Floor



Kubik Pole

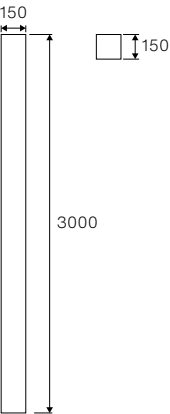


23
W

33
W

Lm	K	▲	Code
1205	3000	130+65°	19.3160.0117
1671	6500	130+65°	19.3160.0118

Lm	K	▲	Code
1607	3000	130+65°	19.3160.0119
2229	6500	130+65°	19.3160.0120

Poles

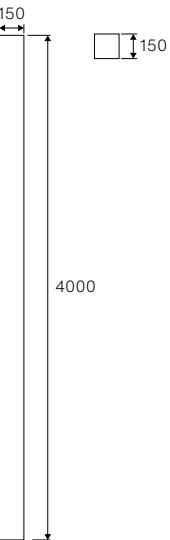

23
W

33
W

Lm	K	▲	Code
1205	3000	130+65°	19.3160.0147
1671	6500	130+65°	19.3160.0148

Lm	K	▲	Code
1607	3000	130+65°	19.3160.0149
2229	6500	130+65°	19.3160.0150

Outdoor

Accessories

17ROFU311150
B-50 Foundations


LUXIONA troll

Kubik Pole ODB


CRI ≥80	IK 09	80000h L80B10
------------	----------	------------------



Installation: Floor

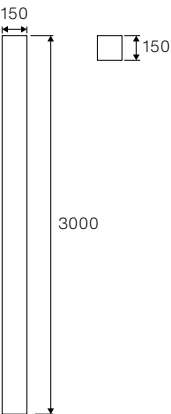

23 W			
Lm	K		Code
1249	3000	130+65°	19.3161.0119
1733	6500	130+65°	19.3161.0120

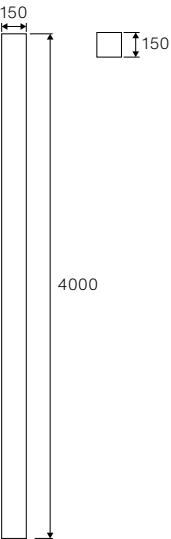

23 W			
Lm	K		Code
1249	3000	130+65°	19.3161.0149
1733	6500	130+65°	19.3161.0150

Kubik Pole L N


CRI ≥70	IK 04	100000h L70B10
------------	----------	-------------------



Diffuser: transparent polycarbonate
Installation: Floor / Surface



Kubik Pole



37 W				
Lm	K		Code	
4023	5700	150+28°	19.3159.0001	


56 W				
Lm	K		Code	
6034	5700	150+28°	19.3159.0004	



75 W				
Lm	K		Code	
8045	5700	150+28°	19.3159.0007	

112 W				
Lm	K		Code	
12069	5700	150+28°	19.3159.0010	

Poles



37 W				
Lm	K		Code	
4023	5700	150+28°	19.3159.0002	


56 W				
Lm	K		Code	
6034	5700	150+28°	19.3159.0005	



75 W				
Lm	K		Code	
8045	5700	150+28°	19.3159.0008	

112 W				
Lm	K		Code	
12069	5700	150+28°	19.3159.0011	

Outdoor



37 W				
Lm	K		Code	
4023	5700	150+28°	19.3159.0003	

56 W				
Lm	K		Code	
6034	5700	150+28°	19.3159.0006	



75 W				
Lm	K		Code	
8045	5700	150+28°	19.3159.0009	

112 W				
Lm	K		Code	
12069	5700	150+28°	19.3159.0012	

LUXIONA **troll**

Accessories

50RO4008 Set of galvanised ROSA nuts for B-51/B-60	17ROFU311151 B-51 Foundations
--	----------------------------------


Kubik Pole

Kubik Pole Out Wall

CRI ≥70	IK 04	100000h L70B10
------------	----------	-------------------



Diffuser: transparent polycarbonate
Installation: Wall / Surface



54
W


Lm	K		Code
6034	5700	150+28°	19.3156.0001

Kubik Pole T

CRI ≥70	IK 04	100000h L70B10
------------	----------	-------------------




Installation: Floor / Surface




75 W				
Lm	K		Code	
9436	5700	150+28°	19.3164.0001	

112 W				
Lm	K		Code	
14155	5700	150+28°	19.3164.0004	




150 W				
Lm	K		Code	
18873	5700	150+28°	19.3164.0007	

225 W				
Lm	K		Code	
28310	5700	150+28°	19.3164.0010	




75 W				
Lm	K		Code	
9436	5700	150+28°	19.3164.0002	

112 W				
Lm	K		Code	
14155	5700	150+28°	19.3164.0005	



150 W				
Lm	K		Code	
18873	5700	150+28°	19.3164.0008	

225 W				
Lm	K		Code	
28310	5700	150+28°	19.3164.0011	



75 W				
Lm	K		Code	
9436	5700	150+28°	19.3164.0003	

112 W				
Lm	K		Code	
14155	5700	150+28°	19.3164.0006	

150 W				
Lm	K		Code	
18873	5700	150+28°	19.3164.0009	

225 W				
Lm	K		Code	
28310	5700	150+28°	19.3164.0012	

Kubik Pole

Poles

Outdoor

LUXIONA troll



Streetpark Mini Compact / Small Premium

Luminaire body in die-cast aluminium and equipped for 48 mm diameter poles. Adaptable to poles 76mm diameter poles by means of a reducer (see data sheet). (see technical datasheet).

It is possible to program an autonomous multi-level dimming for specific solutions.

Streetpark S Compact:

Powder coated cast aluminium housing, highly weather resistant. weather-resistant cast aluminium housing. The luminaire is equipped with an adjustable handle designed for mounting on 60 mm diameter poles and arms. 60 mm diameter poles and brackets. IP66 watertightness level. The diffuser is made of tempered glass.

CE

IP 66

IK 09

LED

CRI ≥70

DRIVER INCL.

ON/ OFF

220 240 V

50 60 Hz

Consult us for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.34

.21

.22

Other finishes
Ask us for custom colours.

Body: Aluminium

LED personalisation
Check all types of LEDs on guide´s page 23


Streetpark Premium

100000h
L70B10

.34

.21

Diffuser: Hardened transparent glass



25
W

Lm	K		Code
2710	4000	135°	19.3176.0001
3056	4000	120°	19.3176.0002
2610	4000	50°	19.3176.0003
2708	4000	140+35°	19.3176.0004
2779	4000	130-90°	19.3176.0005
2699	4000	50°	19.3176.0006
2746	4000	50°	19.3176.0007

42
W

Lm	K		Code
4755	4000	135°	19.3176.0008
5363	4000	120°	19.3176.0009
4579	4000	50°	19.3176.0010
4751	4000	140+35°	19.3176.0011
4876	4000	130-90°	19.3176.0012

55
W

Lm	K		Code
6685	4000	135°	19.3176.0013
7538	4000	120°	19.3176.0014
6437	4000	50°	19.3176.0015
6678	4000	140+35°	19.3176.0016
6854	4000	130-90°	19.3176.0017

Streetpark

Poles

Outdoor


LUXIONA troll

Streetpark Small Premium

100000h
L70B10

.21

Diffuser: Hardened transparent glass



55
W

Lm	K		Code
6342	4000	135°	19.3177.0001
7151	4000	120°	19.3177.0002
6106	4000	50°	19.3177.0003
6336	4000	140+35°	19.3177.0004
6502	4000	130-90°	19.3177.0005

71
W

Lm	K		Code
8908	4000	135°	19.3177.0006
10044	4000	120°	19.3177.0007
8578	4000	50°	19.3177.0008
8899	4000	140+35°	19.3177.0009
9133	4000	130-90°	19.3177.0010


111
W

Lm	K		Code
12684	4000	135°	19.3177.0011
14303	4000	120°	19.3177.0012
12214	4000	50°	19.3177.0013
12671	4000	140+35°	19.3177.0014
13005	4000	130-90°	19.3177.0015

Streetpark Mini Compact



Diffuser: Hardened transparent glass



25 W 60000h L80B10

Lm	K		Code
2708	4000	140+35°	19.3251.0001

42 W 54000h L80B10

Lm	K		Code
4751	4000	140+35°	19.3251.0002

55 W 72000h L80B10


Lm	K		Code
6678	4000	140+35°	19.3251.0003

Streetpark M Premium

100000h L70B10



Diffuser: Hardened transparent glass



35 W

Lm	K		Code
4018	5700	150+28°	19.3174.0001
4018	5700	170-90°	19.3174.0002
3530	4000	50°	19.3174.0003
3617	4000	50°	19.3174.0004

71 W

Lm	K		Code
8036	5700	170-90°	19.3174.0005

54 W

Lm	K		Code
5662	5700	150+28°	19.3174.0007

106 W

Lm	K		Code
12688	5700	50°	19.3174.0006

107 W

Lm	K		Code
11324	5700	170-90°	19.3174.0008

161 W

Lm	K		Code
17880	5700	70°	19.3174.0009

Streetpark

Poles

Outdoor


LUXIONA troll

Streetpark S Premium

100000h
L70B10

.22

Diffuser: Hardened transparent glass



28
W

Lm	K		Code
3013	5700	150+28°	19.3175.0001

42
W

Lm	K		Code
4246	5700	150+28°	19.3175.0004

55
W

Lm	K		Code
6026	5700	170-90°	19.3175.0002

83
W


Lm	K		Code
8802	5700	125°	19.3175.0003
8493	5700	170-90°	19.3175.0005

Streetpark S Compact

60000h
L80B10

.22

Diffuser: Hardened transparent glass



42
W

Lm	K		Code
4246	5700	150+28°	19.3250.0002

83
W

Lm	K		Code
8493	5700	150+28°	19.3250.0004


Streetpark

Poles

60000h
L80B10

.22

Diffuser: SHM (hardened mat glass)



42
W

Lm	K		Code
4404	5700	100°	19.3250.0001

83
W

Lm	K		Code
8808	5700	100°	19.3250.0003

Outdoor

LUXIONA troll

Filar by Luxiona Designers



Features

Luminaire designed for outdoor use in urban areas. With a base of aluminium and a diffuser tube of acrylic sateen, it is supplied with highly efficient LEDs. The size of the base and its foundations must follow UNE-EN 40-2:2006 regulation. In case of doubts, please check with technical department.

CE		IP 65	IK 10
LED	CRI ≥80	SDCM 3	50000h L90B10

ON/ OFF	220 240 V	50 60 Hz
------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Aluminium
Diffuser: Acrilsatine

Installation: Floor / Surface

LED personalisation
Check all types of LEDs on guide´s page 23



Filar




63
W

Lm	K		Code
2912	4000	90°	19.3145.0001

125
W

Lm	K		Code
5824	4000	90°	19.3145.0003



85
W

Lm	K		Code
3952	4000	90°	19.3145.0002

Poles

Accessories

50ALF75/200
F75/200 foundations



Outdoor

Outdoor / Bollards

440
Riddle

450
Box

454
Mark

460
Tosca

442
Kubik Pole

452
Kube

458
Polar

464
Solar

Riddle by Jean Nouvel



Features

Riddle intends to create a conceptual experience through the use of light to remind of nature. Filtering light through holes originates a game of light and shadows that make either urban or private outdoor illumination evoke natural vegetation.

Its sphere-shaped perforated design lends it a peculiar character which is different from that of any other existing luminaire. As a sculpture, it beautifies landscape during the day and encloses it in enigma at night.

500mm diameter

Made of die-cast aluminium, machined and in silver grey, with newest generation LEDs and electronic driver.

250mm diameter

Made of injected polycarbonate, machined and in silver grey.



IP
65

220
240 V

50
60 Hz



CRI
≥80

SDCM
3

60000h
L80B10

Standard finishes

Add needed finish to complete the product reference.

Body: Die-cast aluminum / Injected polycarbonate




Also available on other typology_page 422, 498

IK
08

Installation: Wall / Floor

Body: Injected polycarbonate




12
W

Lm	K		Code
1800	3000	120°	11.6603.1083
1900	4000	120°	11.6603.1084

IK
10

Installation: Floor

Body: Die-cast aluminum



36
W

Lm	K		Code
5600	3000	120°	11.6600.2083
5900	4000	120°	11.6600.2084

Kubik Pole

By Luxiona Designers

- Kubik Pole

Kubik Pole ODB

Kubik 1D

Kubik Pole 4D
- Kubik Pole Soft

Kubik Pole 100

Kubik Pole Soft 100

Kubik 2D



Outdoor luminaire for mounting on solid surfaces. Equipped with state-of-the-art LED sources.

Suitable for lighting pedestrian areas such as parks, parking areas, walkways and entrances to buildings.

The body of the luminaire is corrosion-resistant and made of extruded aluminium coated with special outdoor paint. IP65 watertight luminaire, with IK09 impact resistance.

Each model has an optical system for different applications.

CE

IP 65

CRI ≥80

E27

ON/
OFF

220
240 V

50
60 Hz

Consult us for dimming options.

Standard finishes
Add needed finish to complete the product reference.

.04

.21

.22

.25

Other finishes
Ask us for custom colours.

Body: Aluminium

Installation: Floor / Surface

Also available on other typology_page 424, 518

LED personalisation
Check all types of LEDs on guide´s page 23

Kubik Pole




IK
09

80000h
L80B10

DRIVER
INCL.

.22

Diffuser: Transparent polycarbonate



15
W


Lm	K		Code
803	3000	130+65°	19.3160.0025
1114	6500	130+65°	19.3160.0026

23
W

Lm	K		Code
1205	3000	130+65°	19.3160.0027
1671	6500	130+65°	19.3160.0028

33
W

Lm	K		Code
1607	3000	130+65°	19.3160.0029
2229	6500	130+65°	19.3160.0030



15
W


Lm	K		Code
803	3000	130+65°	19.3160.0055
1114	6500	130+65°	19.3160.0056

23
W

Lm	K		Code
1205	3000	130+65°	19.3160.0057
1671	6500	130+65°	19.3160.0058

33
W

Lm	K		Code
1607	3000	130+65°	19.3160.0059
2229	6500	130+65°	19.3160.0060



15
W

Lm	K		Code
803	3000	130+65°	19.3160.0085
1114	6500	130+65°	19.3160.0086

23
W

Lm	K		Code
1205	3000	130+65°	19.3160.0087
1671	6500	130+65°	19.3160.0088

33
W

Lm	K		Code
1607	3000	130+65°	19.3160.0089
2229	6500	130+65°	19.3160.0090

Accessories

2TJ5782-3
5782-3 Foundations RAL9007

2TJ5782-4
5782-4 Foundations

Kubik Pole

Bollards

Outdoor

LUXIONA troll

Kubik Pole ODB

LED

IK
09

80000h
L80B10

DRIVER
INCL.

.22

Diffuser: Transparent polycarbonate



150

300

150

15
W

Lm	K		Code
833	3000	72+36°	19.3161.0017
1155	6500	72+36°	19.3161.0018

150

600

150

15
W

Lm	K		Code
833	3000	72+36°	19.3161.0047
1155	6500	72+36°	19.3161.0048

150

900

150

15
W

Lm	K		Code
833	3000	72+36°	19.3161.0077
1155	6500	72+36°	19.3161.0078

Kubik 1D

LED

IK
03

100000h
L80B10

SDCM
2


DRIVER
INCL.

.04

.22

.25

Diffuser: None



14 W				
Lm	K		Code	
810	4000	42+42°	19.3146.0001	

Kubik Pole

Bollards

Outdoor

LUXIONA troll

Kubik Pole

Kubik Pole 4D

LED

IK
08

60000h
L80B10

DRIVER
INCL.

.21

Diffuser: None



220

1100

220

220

20
W

Lm	K		Code
2187	4000	60°	19.3158.0001

26
W

Lm	K		Code
3235	4000	60°	19.3158.0002

Kubik Pole Soft

LED

IK
08

76000h
L90B10

SDCM
2

.04

.22

.25

Diffuser: PC (opalescent polycarbonate)



220

900

220

220

28
W

Lm	K		Code
806	4000	180°	19.3163.0001
1121	4000	180°	19.3163.0002



Kubik Pole

Bollards

Outdoor

LUXIONA **troll**

Kubik Pole

Kubik Pole 100

IK
08

Light source not included
E27 LED

.04

.25

Diffuser: PMMA opal



100

100

740

25
W

Lamp Holder

Code

E27

19.3157.0001

25
W

Lamp Holder

Code

E27

19.3157.0002

Kubik Pole Soft 100

IK
08

60000h
L80B10

SDCM
3

DRIVER
INCL.

.04

.21

.22

Diffuser: PMMA opal



160

160

750

21
W

Lm

K

Code

1621

4000

180°

19.3162.0001

28
W

Lm

K

Code

2160

4000

180°

19.3162.0002

Kubik 2D



IK
03


100000h
L80B10

SDCM
2

DRIVER
INCL.




Diffuser: None




14
W

Lm	K		Code
1224	4000	25°	19.3147.0001



14
W

Lm	K		Code
1224	4000	25°	19.3147.0002



14
W

Lm	K		Code
1224	4000	25°	19.3147.0003

Kubik Pole

Bollards

Outdoor

LUXIONA troll



Features

Body made of aluminium alloy, highly resistant to oxidation. With a nanobonderite treatment and textured polyester powder paint finishes, offering maximum resistance to atomospheric agents and UV rays. It sets up silicone gaskets and external screws and stainless steel external screws. It includes a diffuser made of opaline polycarbonate material.

CE		IP 65	IK 08
LED	CRI ≥80	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------


Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.


Body: Aluminium
Diffuser: PC

Installation: Floor / Surface




4
W

Lm	K		Code
108	3000	110°	11.7600.2330




7
W

Lm	K		Code
180	3000	110°	11.7600.2350



11
W

Lm	K		Code
288	3000	110°	11.7600.2380



Accessories

11.7600.0002.00
Box installation

Box

Bollards

Outdoor

LUXIONA troll

Kube



Features

Body made of aluminium alloy, highly resistant to oxidation. With a nanobonderite treatment and textured polyester powder paint finishes, offering maximum resistance to atomospheric agents and UV rays. It sets up silicone gaskets, stainless steel external screws and a highly efficient reflector with ultra-clear tempered glass diffuser, black printed edge.

CE		IP 65	IK 06
LED	CRI ≥90	SDCM 3	10000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------


Consult us for dimming options.

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium

Installation: Floor / Surface




3,5
W

Lm	K		Code
304	3000	Asym 76 + 60°	11.7600.3311




3,5
W

Lm	K		Code
300	3000	Asym 2 x (76 + 60)	11.7600.3312





12
W

Lm	K		Code
1028	3000	36°	11.7600.3321



12
W

Lm	K		Code
1111	3000	2 x 36°	11.7600.3322



Accessories

11.7600.0003.00
Bollard Kube s 90 installation
accessory

11.7600.0004.00
Bollard Kube s 120 installation
accessory

Kube

Bollards

Outdoor

LUXIONA troll

Mark



Features

LED luminaires intended to signal outdoor, garden and pedestrian areas, with a design that beautifies and marks outdoor spaces out.

CE		IP 54	IK 08
LED	CRI ≥80	SDCM 3	50000h L70B10


DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium

Installation: Floor



6
W

Lm	K	Code
230	3000	11.7600.0032
230	4000	11.7600.0042



7
W

Lm	K	Code
221	3000	11.7600.0031
221	4000	11.7600.0041




Mark

Bollards

Outdoor

LUXIONA troll



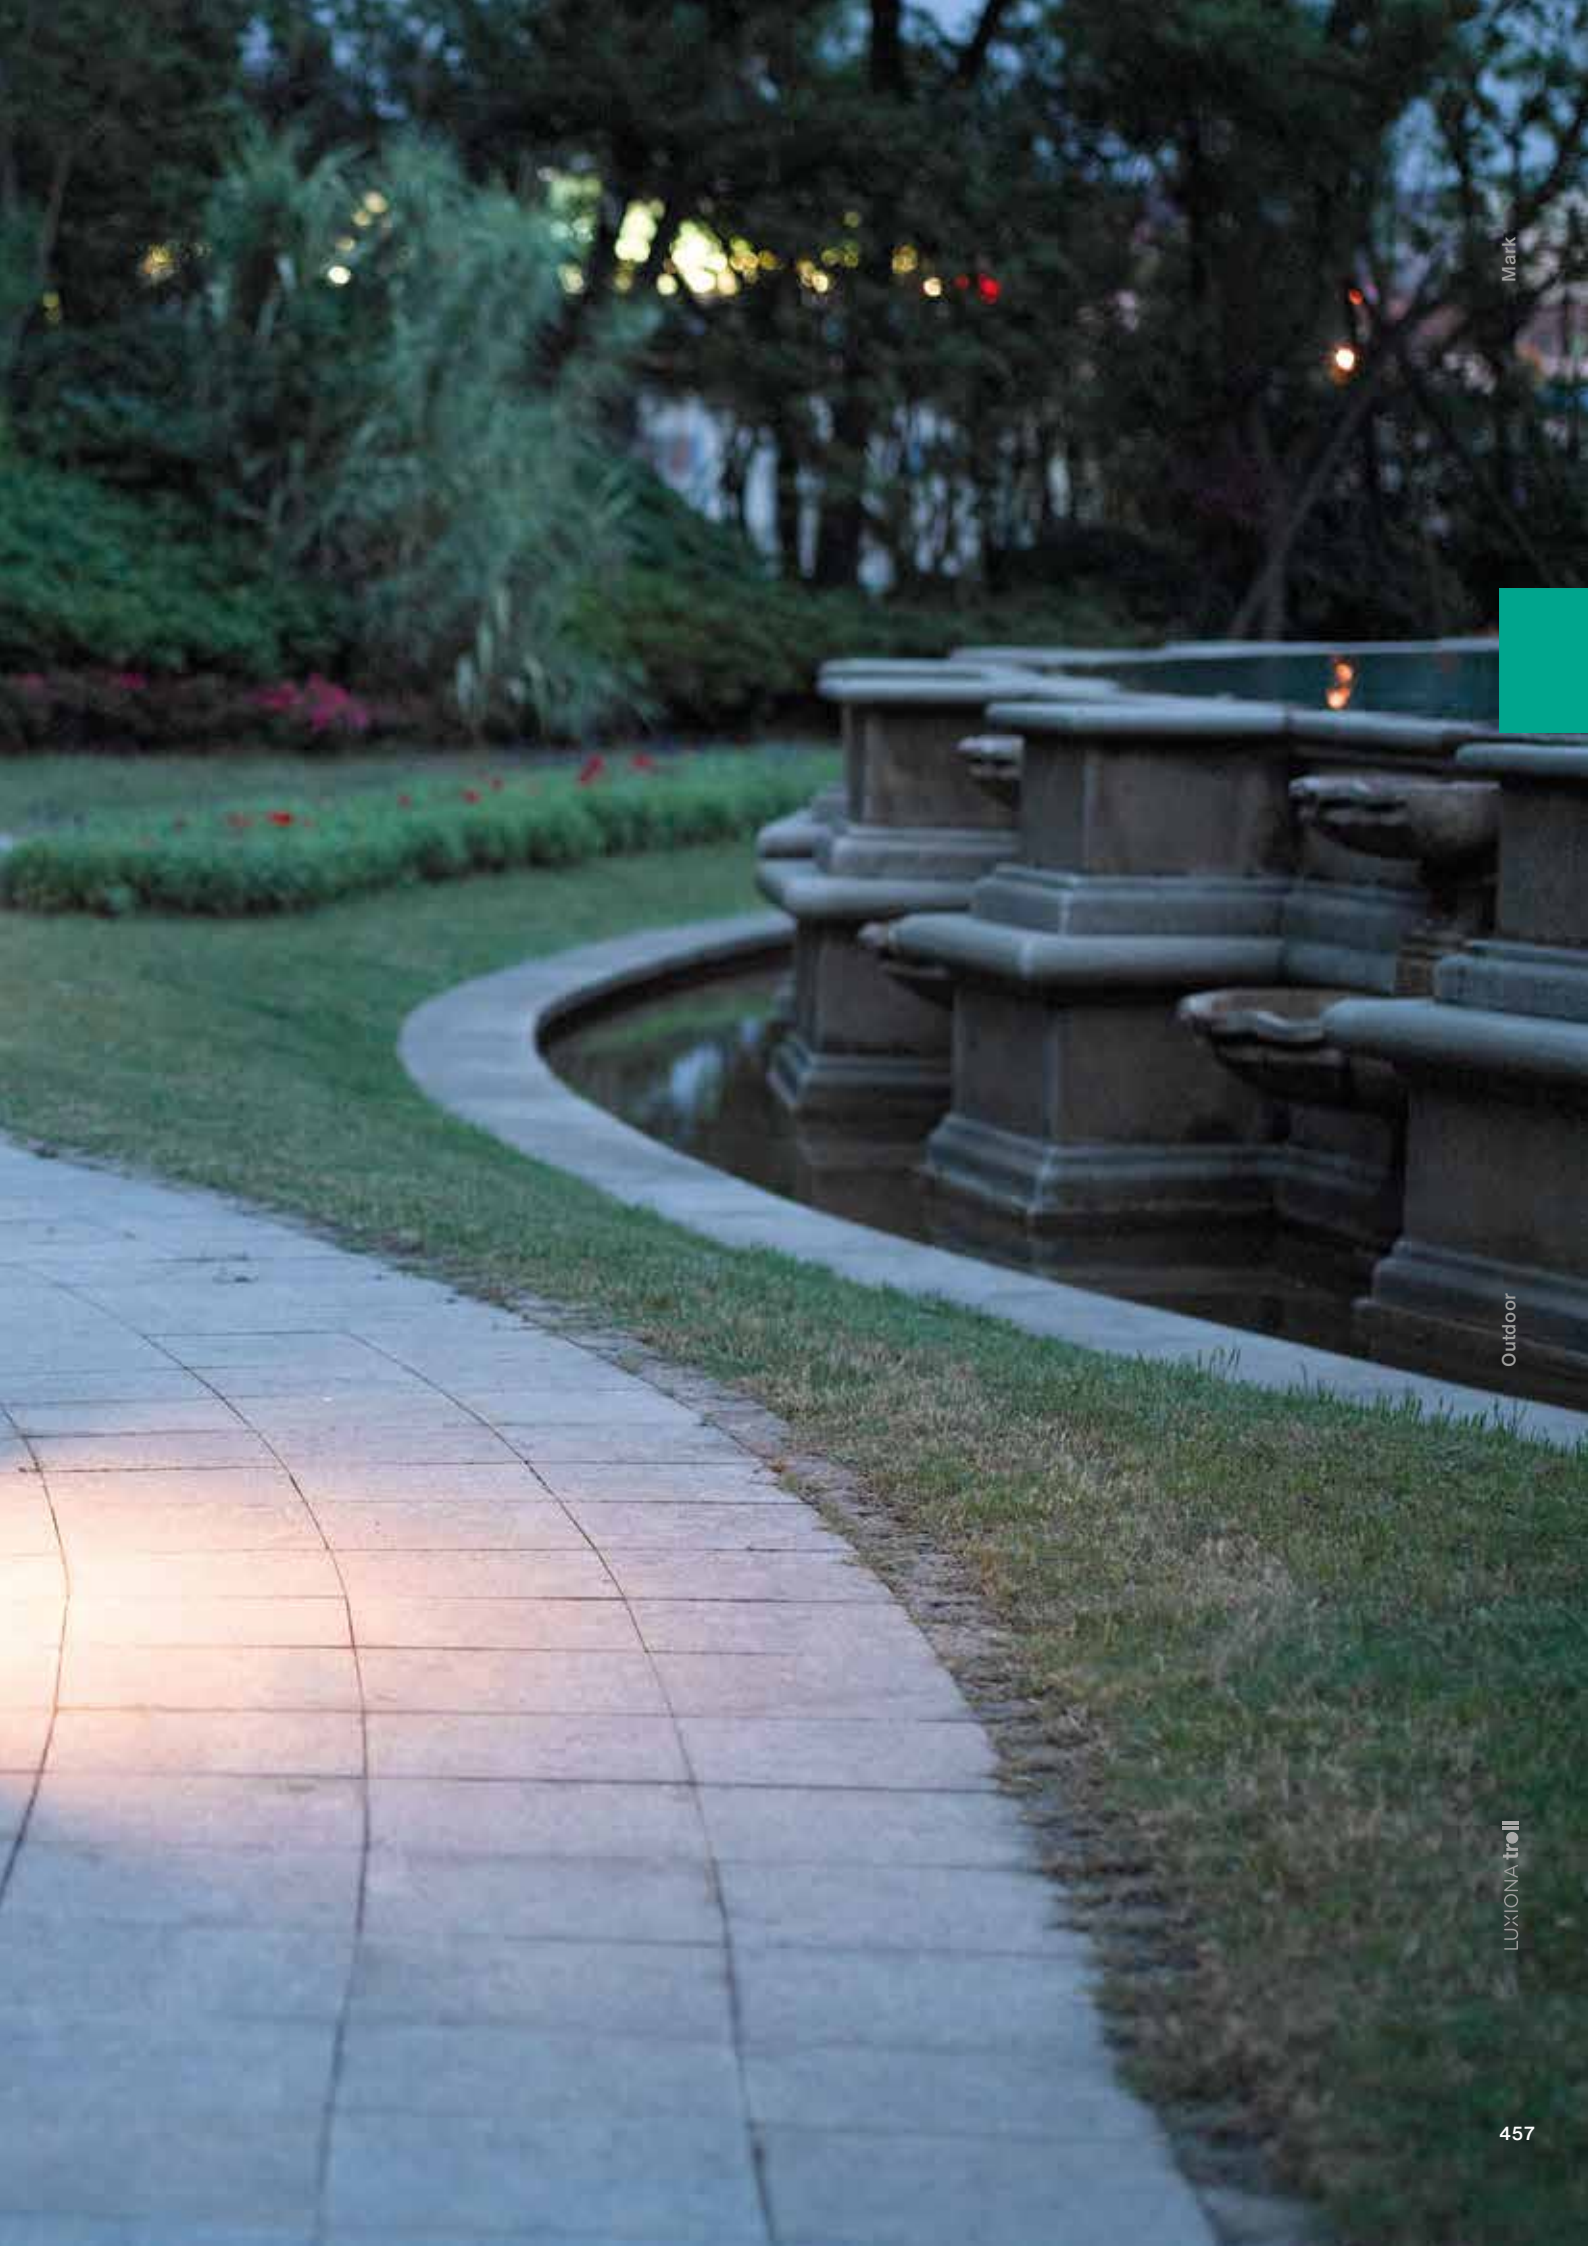


Mark

Outdoor

LUXIONA troll

Polar

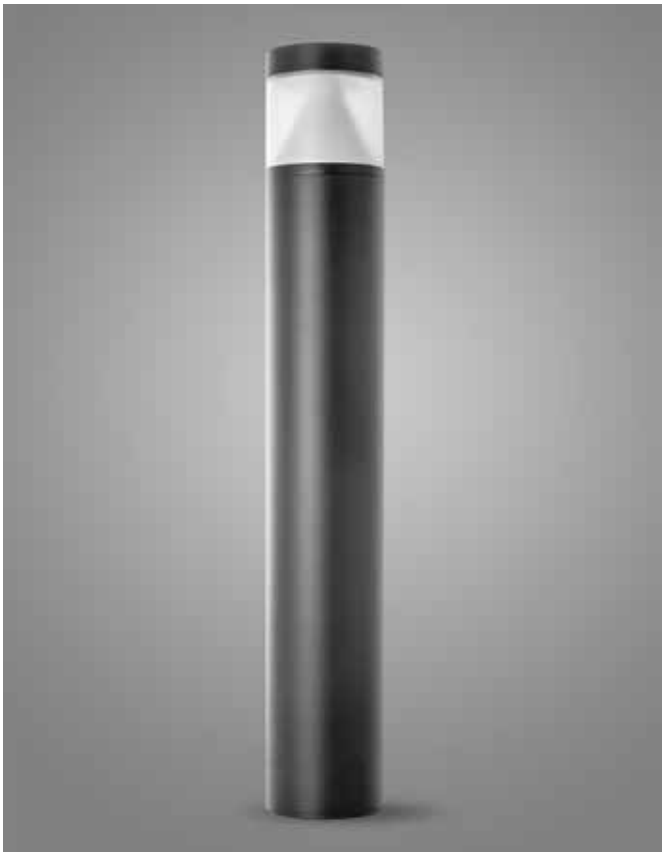

Features

LED beacon designed to signal outdoor pedestrian areas. An alternative for glancing angle lighting that spreads light generously and comfortably, without any emission from the upper hemisphere so that light pollution is avoided. Extruded aluminium body and columns, painted for outdoors. With high pureness aluminium reflector, frosted polycarbonate diffuser and LED and drivers included.


CE		IP 65	IK 08	 850°			
LED	CRI ≥80	SDCM 3	50000h L70B10		DRIVER INCL.	220 240 V	50 60 Hz

Standard finishes
Add needed finish to complete the product reference.



Body: Luminaire body built in extruded Aluminium.

Installation: Floor / Surface



Lm	K	Code
521	3000	11.7600.0033
521	4000	11.7600.0043

Polar

Bollards

Outdoor

LUXIONA troll



Features

Outdoor luminaire to be mounted on hard surface (concrete, sett blocks or foundations) equipped with the latest generation, highly efficient and energy saving LED sources. Aluminium casing. corrosion resistant. The product is intended to illuminate walking paths, parks, recreational areas, residential areas. IP65 level of protection against penetration of dust, moisture and solids.

CE		IP 65	IK 08
LED	CRI ≥80	SDCM 3	

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes

Add needed finish to complete the product reference.



Body: Aluminum

Installation: Floor / Surface



Tosca

60000h
L80B10



Diffuser: Transparent polycarbonate



Tosca



15
W



Lm	K		Code
1336	4000	100°	19.3178.0002

Bollards



15
W

Lm	K		Code
1336	4000	100°	19.3178.0004



15
W

Lm	K		Code
1336	4000	100°	19.3178.0006



Outdoor

Tosca Slim

60000h
L80B10



Diffuser: PMMA opal



17
W

Lm	K		Code
1348	4000	100°	19.3179.0001

LUXIONA troll





Osiedle na Woli apartments, Warsaw. Poland.

Tosca

Bollards

Outdoor


LUXIONA troll



Features

Bollard of aluminium with polycarbonate diffuser. It includes newest generation LEDs. With a lithium battery that recharges from daylight and a presence detector (120°/6m). The luminaire is supplied with a selector to choose the working mode:

1. On: the luminaire starts working with 100% lighting intensity when no daylight is detected.
2. Auto: the luminaire starts working when presence is detected and there is no daylight, and stops after a while.
3. Dim: the luminaire starts working with 30% intensity when there is no daylight and increases intensity to 100% when presence is detected



Standard finishes


Add needed finish to complete the product reference.



Body: Aluminium

Installation: Floor / Surface

Also available on other typology_page 512



2
W

Lm	K		Code
96	3000	95°	11.7600.4310

Solar

Bollards

Outdoor

LUXIONA troll

Outdoor / Recessed

468
Fasad

474
Bot

482
Num

486
Small-Up

493
Dive

470
E-Wall

476
Signal

484
Mini-Up

490
Ras

494
Atlante



Features

Luminaire made of aluminium profile with a weatherproof treatment. Optical system made up of highly efficient LEDs with transparent PC lenses. Transparent or sanded tempered glass diffuser. With installation case, recessed on ground.

CE		IP 67	IK 10
LED	CRI ≥80	SDCM 3	100000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------



Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium
Diffuser: SH (transparent hardened glass)

Installation: Floor / Recessed

Also available on other typology_page 410



14
W


Lm	K		Code
1455	3000	90+30°	19.3142.0001
1532	4000	90+30°	19.3142.0002
1367	3000	55+38°	19.3142.0003
1439	4000	55+38°	19.3142.0004
1323	3000	30+34°	19.3142.0005
1393	4000	30+34°	19.3142.0006

14
W

Lm	K		Code
2072	3000	66-95°	19.3142.0007
2182	4000	66-95°	19.3142.0008
1962	3000	52-95°	19.3142.0009
2066	4000	52-95°	19.3142.0010
1874	3000	30-114°	19.3142.0011
1973	4000	30-114°	19.3142.0012

Fasad

Recessed



28
W

Lm	K		Code
2910	3000	90+30°	19.3142.0013
2879	4000	55+38°	19.3142.0014
2646	3000	30+34°	19.3142.0015
2786	4000	30+34°	19.3142.0016

28
W

Lm	K		Code
4145	3000	66-95°	19.3142.0017
4365	4000	66-95°	19.3142.0018
3924	3000	52-95°	19.3142.0019
4133	4000	52-95°	19.3142.0020
3748	3000	30-114°	19.3142.0021
3947	4000	30-114°	19.3142.0022

Outdoor

LUXIONA troll




Features

E-Wall

E-wall is a range of LED lamps for glancing angle and runway lighting, to be built-in on walls indoors or outdoors. With aluminium body and opal diffuser of polycarbonate or tempered glass. Available versions with slats or diffuser. Included LEDs and equipment. Supplied with 0.5m long connection cable. To be recessed on the wall.

Kubin In

Outdoor luminaire made of aluminium with asymmetric distribution of luminous flux. It includes case to be recessed.



DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes

Add needed finish to complete the product reference.




Body: Aluminium

Installation: Wall / Recessed


E-Wall

SDCM	60000h
3	L80B10

Diffuser: Transparent polycarbonate



3 W	IP 65	IK 09		
Lm	K			Code
195	3000	11°		11.5000.5000



3 W	IP 65	IK 10		
Lm	K			Code
61	3000	Assym 30°		11.5000.2340

E-Wall

Recessed

Outdoor

LUXIONA troll


E-Wall

E-Wall

SDCM	60000h
3	L80B10


Diffuser: Transparent polycarbonate

20




1,7 W	IP 65	IK 10	
----------	----------	----------	--

Lm	K		Code
56	3000	Assym 120°	11.5000.2320



3,5 W	IP 67	IK 09	
----------	----------	----------	--

Lm	K		Code
47	3000	120°	11.5000.2330



5,7 W	IP 65	IK 08	
----------	----------	----------	--

Lm	K		Code
398	3000	45° + 35°	11.5000.2310

Kubin In by Luxiona Designers


50000h L70B10	IP 65	IK 09
------------------	----------	----------

Diffuser: Transparent polycarbonate

E-Wall



Recessed




3 W				
Lm	K			Code
124	4000	100+40°		19.3152.0001

5 W				
Lm	K			Code
249	4000	100+40°		19.3152.0002

7 W				
Lm	K			Code
373	4000	100+40°		19.3152.0003

10 W				
Lm	K			Code
498	4000	100+40°		19.3152.0004

Outdoor



10 W				
Lm	K			Code
498	4000	100+40°		19.3152.0005

13 W				
Lm	K			Code
747	4000	100+40°		19.3152.0006

15 W				
Lm	K			Code
997	4000	100+40°		19.3152.0007

LUXIONA troll



Features

Body made of injected aluminium coated with dark grey powder paint. It is supplied with the latest generation LEDs and a 6mm polycarbonate diffuser.

CE		IP 65	IK 08
LED	CRI ≥80	SDCM 3	50000h L70B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------


Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium


Installation: Wall / Surface

Also available on other typology_page 510





3
W

Lm	K		Code
120	3000	130°	11.5000.1311



3
W

Lm	K		Code
196	3000	110°	11.5000.1312



3
W


Lm	K		Code
117	3000	110°	11.5000.1313

Bot

Recessed

Outdoor

LUXIONA troll

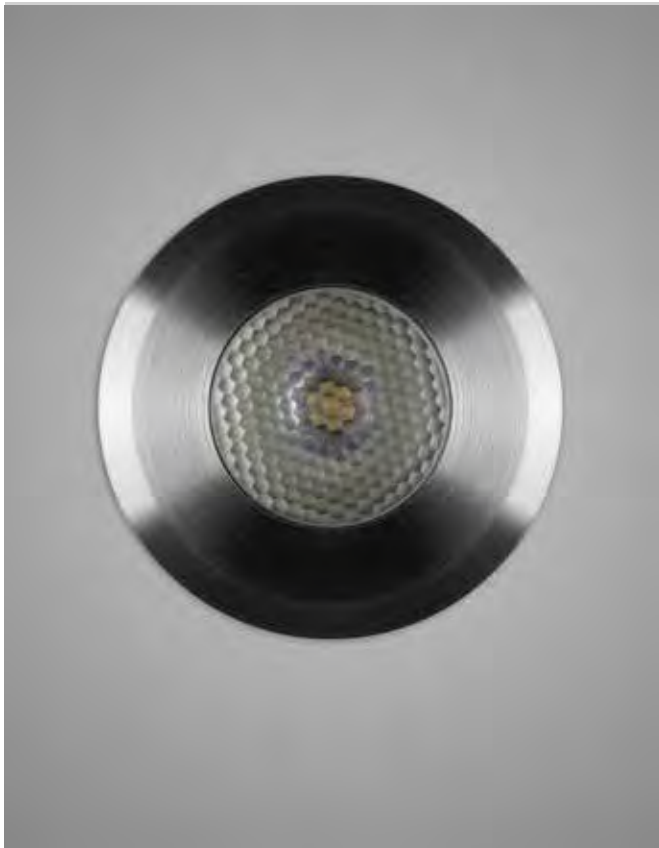

Features

The body and the closing ring of the diffuser are made of aluminium alloy, highly resistance to oxidation with anodizing treatment. It includes silicone gaskets and an opal tempered glass diffuser. The outer frame is made of machined stainless steel. Designed to avoid condensation from alternate on-off cycles. To be recessed with a polypropylene casing.



Standard finishes

Add needed finish to complete the product reference.

Installation: Wall / Ceiling / Floor / Recessed



Signal W



IP
68

CRI
≥90


60000h
L80B10



24
VDC


Body: Aisi 316L

Installation: Wall recessed




1
W

Lm	K	Beam spread	Code
35	3000	110°	11.5201.5311



1
W

Lm	K	Beam spread	Code
35	3000	110°	11.5201.5321




3
W

Lm	K	Beam spread	Code
270	3000	37°	11.5201.5312

1
W

Lm	K	Beam spread	Code
35	3000	110°	11.5201.5322



Accessories



11.5201.0001 Housing Signal wall / Floor 32mm	11.5201.0002 Housing Signal wall / Floor 45mm	11.5201.0003 Housing Signal wall / Floor 55mm
---	---	---

Signal

Recessed

Outdoor

LUXIONA troll

Signal

Signal C



IP
66

IK
08

CRI
≥90


60000h
L80B10




24
VDC

Body: Aisi 316L


Installation: Ceiling recessed



1.5 W				
Lm	K			Code
114	3000	31°		11.5201.4311



2 W				
Lm	K			Code
144	3000	47°		11.5201.4321



3 W				
Lm	K			Code
270	3000	37°		11.5201.4322

6 W				
Lm	K			Code
684	3000	62°		11.5201.4312

Signal F



IP
68

IK
08

CRI
≥90


60000h
L70B10



24
VDC


Body: Stainless steel Aisi 316L

Installation: Floor recessed



2
W


Lm	K	▲	Code
118	3000	16°	11.5201.1311
114	3000	32°	11.5201.1321



2
W

Lm	K	▲	Code
209	3000	16°	11.5201.1312
144	3000	32°	11.5201.1322

Kg= 500



Accessories



11.5201.0001

Housing Signal wall /
Floor 32mm

11.5201.0002

Housing Signal wall /
Floor 45mm

11.5201.0003

Housing Signal wall /
Floor 55mm



IP
67

IK
08

CRI
≥80


50000h
L70B50

DRIVER
INCL

220
230 V

50
60 Hz


Body: Stainless steel SUS316L



3
W

Lm	K	▲	Code
139	3000	9°	11.5201.2311
120	3000	20°	11.5201.2321
120	3000	45°	11.5201.2312
142	3000	45° + 35°	11.5201.2322

Kg= 140



Accessories

11.5201.2000.00

Signal honeycomb

Signal

Recessed

Outdoor

LUXIONA troll

Signal

Signal F WD



IP
67



CRI
≥80




60000h
L80B10



24
VDC

Body: Aluminium body + front Aisi 316L

Installation: Wooden floor recessed





0,4
W



IK
10

Lm	K		Code
7	3000	120°	11.5201.3301



2,5
W



IK
08

Lm	K		Code
109	3000	30°	11.5201.3311
88	3000	45° + 35°	11.5201.3321

Signal F Micro



IP
68

IK
08


CRI
≥80

60000h
L80B10



24
VDC


Body: Aluminium body + front Aisi 316L
Installation: Floor recessed



Kg= 500

2
W


Lm	K	Beam	Code
16	3000	120°	11.5201.6301



Kg= 500

2
W


Lm	K	Beam	Code
35	3000	2 x 90°	11.5201.6302



Kg= 500

2
W

Lm	K	Beam	Code
70	3000	4 x 75°	11.5201.6304



Accessories

.04

11.5201.0003
Housing Signal wall /
Floor 55mm

Signal

Recessed

Outdoor

LUXIONA troll



Features

Die-cast aluminium casing. This technology significantly increases possibility to apply a specific luminaire due to the lighter load the ceiling has to bear, since additional cooling radiator is not required. Luminaire is aimed at prestigious interiors such as hotels, banks and high level offices. Owing to the application of newest components and renowned producers of LEDs it was possible to build such luminaires, which save energy consumption comparing with traditional solutions.

CE		IP20 IP65	IK 04
LED	CRI ≥80	SDCM 2	83000h L90B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------


Standard finishes
Add needed finish to complete the product reference.



Other finishes
Ask us for custom colours.

Body: Aluminium

Installation: Ceiling / Recessed




8
W

Lm	K		Code
762	4000	90°	19.3052.1301
740	3000	90°	19.3052.1302
641	4000	85°	19.3052.1201
623	3000	85°	19.3052.1202
702	4000	40°	19.3052.1101
681	3000	40°	19.3052.1102

14
W

Lm	K		Code
1416	4000	90°	19.3052.2301
1375	3000	90°	19.3052.2302
1192	4000	85°	19.3052.2201
1158	3000	85°	19.3052.2202
1304	4000	40°	19.3052.2101
1267	3000	40°	19.3052.2102





20
W

Lm	K		Code
2105	4000	110°	19.3052.3301
2044	3000	110°	19.3052.3302
2133	4000	100°	19.3052.3201
2071	3000	100°	19.3052.3202
2385	4000	75°	19.3052.3101
2317	3000	75°	19.3052.3102

27
W

Lm	K		Code
2930	4000	110°	19.3052.4301
2845	3000	110°	19.3052.4302
2969	4000	100°	19.3052.4201
2883	3000	100°	19.3052.4202
3320	4000	75°	19.3052.4101
3224	3000	75°	19.3052.4102



20
W

Lm	K		Code
2357	4000	70°	19.3052.5301
2289	3000	70°	19.3052.5302
2161	4000	95°	19.3052.5201
2099	3000	95°	19.3052.5202
2414	4000	75°	19.3052.5101
2099	3000	75°	19.3052.5102

27
W

Lm	K		Code
3281	4000	70°	19.3052.6301
3186	3000	70°	19.3052.6302
3008	4000	95°	19.3052.6201
2921	3000	95°	19.3052.6202
3360	4000	75°	19.3052.6101
3262	3000	75°	19.3052.6102

Num

Recessed

Outdoor

LUXIONA troll

Mini-Up N



Features

Recessed luminaire with injected aluminium body. Stainless steel front in two versions, round and square. 5mm thick tempered glass. It bears a weight of 780Kg. Opening angle of 9 °, 20 ° or 45 °. Supplied with a 0.5m long connection cable (equipment included).
IP68 version available, suitable for submersible installations. It is installed embedded to be recessed the ground in a PVC installation box.

CE		IP 67	IK 08
LED	CRI ≥80	SDCM 3	50000h L70B10


DRIVER INCL.	220 230 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium body + Aisi 316L cover

Installation: Floor /Recessed




4,5
W

Lm	K		Code
272	3000	9°	11.5202.1311
272	3000	20°	11.5202.1321
209	3000	45°	11.5202.1341

Mini-Up

Recessed

Outdoor



Accessories

11.5202.1000
Mini-Up Honeycomb

LUXIONA troll



Features

Small-Up are LED luminaires to be recessed on road surfaces with a stainless steel exterior ring. They may be installed both indoors and outdoors. Intended to light up and signal road areas. Body made of injected aluminium with stainless steel front. Protection tempered glass of 8mm. They bear burdens of up to 780kg (adjustable version) and 2,500kg (fixed version). Runway lighting versions for glancing angle lighting of 1, 2 or 4 openings, bearing up to 2,000kg. Supplied with 0.5m long connection cable and PVC recesses. LEDs and drivers included. The adjustable version includes an exterior gobo.

Small-Up
Small-Up WD
Small-DR
Small-AD

CE

IP
67

LED

CRI
≥80

SDCM
3

50000h
L70B10

Standard finishes
Add needed finish to complete the product reference.



Body: Aluminium body + Aisi 316L cover

Installation: Floor / Recessed

Small-Up




IK
08

DRIVER
INCL.

220
230 V


50
60 Hz



Kg= 2500

6
W

Lm	K		Code
442	3000	9°	11.5202.2311
397	3000	20°	11.5202.2312
289	3000	45°	11.5202.2314
289	3000	asym 45 + 35°	11.5202.2316



Accessories

11.5202.2000
Small-Up Honeycomb




IK
08

220
230 V

50
60 Hz

Lámpara no incluída
Casquillo GU10



11
W

Code
11.5203.5000

Small-Up

Recessed

Outdoor

LUXIONA troll


Small-Up

Small-Up WD



IK
08

24
VDC



6
W

Lm	K	Beam Angle	Code
354	3000	30°	11.5202.5311
354	3000	Asym 45 + 35°	11.5202.5316

Small-DR




IK
09

DRIVER
INCL.

220
230 V

50
60 Hz


Deep Recessed



7,2
W

Lm	K	Beam Angle	Code
416	3000	10°	11.5202.3311
416	3000	20°	11.5202.3312

Kg= 2500Kg



Accessories

11.5202.3000
Small-Up Deep Honeycomb

Small-AD



IK
09




20°

DRIVER
INCL.


220
230 V

50
60 Hz



3,5 W			
Lm	K		Code
258	3000	10°	11.5202.4311
290	3000	20°	11.5202.4312
267	3000	30°	11.5202.4313

 Kg= 1200



Accessories

11.5202.4000
Small-Up Orientable Honeycomb

Small-Up

Recessed

Outdoor



Features

Body made of aluminium alloy, highly resistant to oxidation. With a nanobonderite treatment and textured polyester powder paint finish, offering maximum resistance to atmospheric agents and UV rays. It sets up silicone gaskets, stainless steel screws. It includes a striated tempered glass diffuser. For installation directly on walls using fixation screws.

CE		IP 65	IK 09
LED	CRI ≥90	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium

Installation: Wall / Recessed

Also available on other typology_page 500


Ras R

Ras



4 W		
Lm	K	Code
70	3000	11.2032.2311

Recessed



8,7 W		
Lm	K	Code
176	3000	11.2032.2312


Outdoor

Accessories

11.2032.0001.00 Housing ras round 140	11.2032.0002.00 Housing ras round 220	11.2032.0006.00 Extraction tool recessed ras
--	--	---

Ras


Ras SQ



124 x 124

2,9
W


Lm	K	Code
47	3000	11.2032.2313



204 x 204

8,7
W

Lm	K	Code
176	3000	11.2032.2314



244 x 124

8,7
W

Lm	K	Code
165	3000	11.2032.2315

Accessories

11.2032.0003.00
Housing Ras SQ 120

11.2032.0004.00
Housing Ras SQ 200

11.2032.0005.00
Housing Ras SQ 240



Features

Body made of SUS136 chrome stainless steel. With a tempered glass diffuser (7mm-2.5W; 8mm-8W), silicone gaskets and PMMA lenses. It is powered at 24V by remote drivers. To be installed submerged in water, 1m depth max. Water temperature between -20°C and 40°C. It is adjustable.

Dive

Recessed

CE

IP
68

IK
06

LED

CRI
≥80

SDCM
3

50000h
L80B10

24
VDC


Standard finishes
Add needed finish to complete the product reference.

Body: Stainless steel SUS316L


.20

Installation: Wall / Floor / Water / Recessed

Outdoor



2,7 W				
Lm	K		Code	
148	3000	30°	11.5204.1313.20	




8,9 W				
Lm	K		Code	
414	3000	30°	11.5204.2311.20	

LUXIONA troll



Features

Atlante is a range of medium-size LED luminaires to be recessed, designed for indirect lighting of facades, trees or objects of small or medium sizes. Body made of injected aluminium, with stainless steel front. Protection tempered glass of 10mm. It bears burdens of more than 2900kg. It is supplied with 0.5m long connection cable, an included driver and a reflector of 12°, 22°, 38° and asymmetric. To be recessed on the ground.



DRIVER INCL.	230 240 V	50 60 Hz
-----------------	--------------	-------------

Consult us for dimming options.

Standard finishes

Add needed finish to complete the product reference.




Body: Aluminium body + Stainless steel SUS316L

Installation: Floor / Recessed

LED personalisation

Check all types of LEDs on guide's page 23.


IP 66	50000h L70B10
----------	------------------



13,7
W

Lm	K		Code
1194	3000	12°	11.5203.1311
1130	3000	35°	11.5203.1331
1127	3000	55°	11.5203.1341


Atlante



19,2
W

Lm	K		Code
1561	3000	10°	11.5203.2311
1491	3000	22°	11.5203.2321
1312	3000	38°	11.5203.2331

Recessed




27
W

Lm	K		Code
1723	3000	12°	11.5203.3311
1653	3000	25°	11.5203.3321
1621	3000	38°	11.5203.3331



Outdoor

IP 68	10000h L80B10
----------	------------------

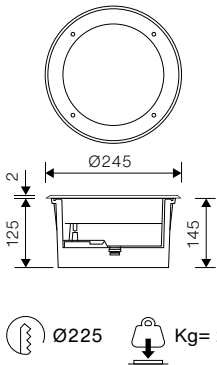

18
W

Lm	K		Code
1867	3000	Asym 55 + 45°	11.5203.4381



LUXIONA troll

Accesorios	11.5203.1000.00 Atlante 13W honeycomb	11.5203.2000.00 Atlante 16W honeycomb	11.5203.0001.04 Housing atlante 245 wall washer
	11.5203.3000.00 Atlante 25W honeycomb		

Outdoor / Surface

498
Riddle

502
Ametyst

506
Owly

512
Solar

514
Beryl

522
Pipe 65

500
Ras

505
Luxwall

510
Bot

513
Window

518
Kubik

524
Land

Riddle by Jean Nouvel



Features

Riddle concept arises as if solar light itself was seeping through vegetation. These spherical luminaires create light and shadow effects, for urban or private outdoor lighting.

Their sphere-shaped perforated design lends them a peculiar character which is different from that of any other existing luminaire. With its sculptural design, they ennoble landscape during the day and enclose it in enigma at night.

Made of injected polycarbonate, machined and painted in silver grey.

Two versions available: to be fixed on walls or ceilings or to be suspended on ceilings.

CE		IP 65	IK 08	 850°
LED	CRI ≥80	SDCM 3	60000h L80B10	

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------


Standard finishes
Add needed finish to complete the product reference.



Body: Injected polycarbonate


Installation: Ceiling / Suspended Installation

Also available on other typology_page 422, 440




12
W

Lm	K		Code
2800	3000	120°	11.6603.1083
2900	4000	120°	11.6603.1084




18
W

Lm	K		Code
2800	3000	120°	11.6604.1083
2900	4000	120°	11.6604.1084



18
W

Lm	K		Code
2800	3000	120°	11.6606.1083
2800	4000	120°	11.6606.1084



36
W

Lm	K		Code
5600	3000	120°	11.6606.2083
5900	4000	120°	11.6606.2084

Riddle by Jean Nouvel

Surface

Outdoor

LUXIONA troil



Features

Body made of aluminium alloy, highly resistant to oxidation. With a nanobonderite treatment and textured polyester powder paint finishes, offering maximum resistance to atmospheric agents and UV rays. It sets up silicone gaskets, stainless steel screws. It includes a striated tempered glass diffuser. To install on a stainless steel casing recessed on the wall.

CE		IP 65	IK 09
LED	CRI ≥90	SDCM 3	60000h L80B10

DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium


Installation: Wall / Surface

Also available on other typology_page 490

Ras R




4 W		
Lm	K	Code
70	3000	11.2032.1311




8,7 W		
Lm	K	Code
176	3000	11.2032.1312


Ras SQ



2,9 W		
Lm	K	Code
47	3000	11.2032.1313



8,7 W		
Lm	K	Code
176	3000	11.2032.1314



8,7 W		
Lm	K	Code
165	3000	11.2032.1315

Ras

Surface

Outdoor

LUXIONA troll



Features

Surface luminaires supplied with highly efficient LED panels.
Body and diffuser made of IK10 material, impact resistant.

CE

IP
65

IK
10

LED

CRI
≥80

SDCM
3

DRIVER
INCL.

220
240 V

50
60 Hz

Consult for dimming options
Consult for emergency mode

Standard finishes
Add needed finish to complete the product reference.



Body: Polycarbonate / Steel Sheet



Diffuser: PC (opalescent polycarbonate)

Installation: Wall / Ceiling / Surface

Ametyst 500



100000h
L80B10



18
W

Lm	K		Code
1907	3000	120°	19.3070.0001
2020	4000	120°	19.3070.0002

26
W

Lm	K		Code
2635	3000	120°	19.3070.0005
2790	4000	120°	19.3070.0006

18
W

Motion
Sensor

Lm	K		Code
1907	3000	120°	19.3070.0003
2020	4000	120°	19.3070.0004

26
W



Motion
Sensor

Lm	K		Code
2635	3000	120°	19.3070.0007
2790	4000	120°	19.3070.0008

Ametyst new



100000h
L80B10



12
W

Lm	K		Code
1420	3000	115°	19.3071.0001
1503	4000	115°	19.3071.0003

18
W

Lm	K		Code
2020	3000	115°	19.3071.0007
2138	4000	115°	19.3071.0009

26
W

Lm	K		Code
2790	3000	115°	19.3071.0012
2955	4000	115°	19.3071.0014

12
W

Motion
Sensor

Lm	K		Code
1420	3000	115°	19.3071.0002
1503	4000	115°	19.3071.0004

18
W

Motion
Sensor

Lm	K		Code
2020	3000	115°	19.3071.0008
2138	4000	115°	19.3071.0010

26
W


Motion
Sensor

Lm	K		Code
2790	3000	115°	19.3071.0013
2955	4000	115°	19.3071.0015

Ametyst new Compact



80000h
L80B10



12
W

Lm	K		Code
1419	3000	115°	19.3237.0001
1503	4000	115°	19.3237.0002

18
W

Lm	K		Code
2020	3000	115°	19.3237.0003
2138	4000	115°	19.3237.0004

26
W

Lm	K		Code
2790	3000	115°	19.3237.0005
2955	4000	115°	19.3237.0006



Features

Outdoor luminaire designed to light up vertical surfaces with a discreet presence. Easy integration into architectural space.

Luxwall

Surface

CE

IP

65

IK

06

100000h

L80B10

LED

CRI

≥80

DIVER

INCL.

220

240

V

50

60

Hz

Outdoor

Standard finishes
Add needed finish to complete the product reference.

.22

.34


.25

.04

.21

Body: Aluminium

Installation: Wall / Surface



21 W			
Lm	K		Code
2415	3000	95°	19.3168.0001
2542	4000	95°	19.3168.0002

LUXIONA troll



Features

Range of LED wall lamps to be surface mounted. For general lighting application, with degrees of protection so that they may be used outdoors or indoors.

CE

IP
54

50000h
L70B10

LED

CRI
≥80

DRIVER
INCL.

Standard finishes
Add needed finish to complete the product reference.

.25

Body: Die-Cast aluminium


Installation: Wall / Ceiling / Surface

Owly C

SDCM 3	220 230 V	50 60 Hz	IK 06
-----------	--------------	-------------	----------



Body: Aluminium
Diffuser: PC



11 W

Lm	K	Beam Angle	Code
700	3000	140°	11.6105.2300

Owly


Surface

Owly Dova N

220 230 V	50 60 Hz	IK 05
--------------	-------------	----------



Body: Aluminium
Diffuser: PC



15 W

1 Ex27 max15W

Code
11.5000.1001

Outdoor


LUXIONA troll

Owly W

220 230 V	50 60 Hz
--------------	-------------




Body: Aluminium




18
W

Lm	K		Code
425	4000	105°	11.1611.0001




18
W

Lm	K		Code
747	4000	105°	11.1611.0002




10
W

Lm	K		Code
379	3000	105°	11.6105.0001




10
W

Lm	K		Code
236	3000	105°	11.6105.0002



10
W



Lm	K		Code
201	3000	105°	11.6105.0003



7
W

Lm	K		Code
272	3000	105°	11.6105.0011


Owly



7
W

Lm	K		Code
201	3000	105°	11.6105.0012

Surface



7
W

Lm	K		Code
148	3000	105°	11.6105.0013



Outdoor

LUXIONA troll



Features

Luminaire made of injected aluminium, powder coated in dark grey. It includes newest generation LEDs and a 6mm polycarbonate diffuser.



Standard finishes


Add needed finish to complete the product reference.



Body: Aluminium


Installation: Wall / Surface

Also available on other typology_page 474




3
W

Lm	K		Code
12	3000	130°	11.5000.1301



3
W

Lm	K		Code
196	3000	110°	11.5000.1302



2,7
W

Lm	K		Code
117	3000	110°	11.5000.1303

Bot

Surface

Outdoor

LUXIONA **troll**



Features

Wall lamp with aluminium body and a polycarbonate diffuser. Latest generation LEDs. The luminaire sets up a daylight rechargeable lithium battery and a presence detector (120°/6m). The luminaire includes a selector to choose the working mode:

- 1. On: the luminaire starts working with 100% lighting intensity when no daylight is detected.
- 2. Auto: the luminaire starts working when presence is detected and there is no daylight, and stops after a while.
- 3. Dim: the luminaire starts working with 30% intensity when there is no daylight and increases intensity to 100% when presence is detected.

		IP 54	IK 06	DRIVER INCL.	Standard finishes Add needed finish to complete the product reference.	Body: Aluminium
	CRI ≥80	SDCM 3	50000h L70B10	.25		Installation: Surface

Also available on other typology_page 464

			Lm	K		Code
			96	3000	95°	11.7600.4311



Features

Luminaire made of injected aluminium, powder coated with dark grey finish. It includes a concave lens that creates the effect of a perimeter edge surrounding its installation point.

Solar - Window

Surface

		IP65	IK06
LED	CRI≥80	SDCM3	50000h L70B10

Standard finishes
Add needed finish to complete the product reference.




Body: Aluminium

Outdoor

Installation: Ceiling / Floor / Surface

DRIVER INCL.	220-230 V	50-60 Hz
-----------------------------	----------------------	---------------------



3W		
Lm	K	Code
76	3000	11.2034.0001

LUXIONA troll



Features

Luminaires adapted to be installed on walls, with high lighting efficiency LEDs. Body made of anodized aluminium profile. Resistant to solids, dust or liquid infiltration - IP65. This type of luminaire is suitable for ornamental or accent lighting of buildings.

CE

IP
65

IK
06

LED

CRI
≥80

DRIVER
INCL.

220
240 V

50
60 Hz

Standard finishes
Add needed finish to complete the product reference.

.34

.25

.04


.21

Body: Aluminium

Installation: Wall / Surface

Beryl Proof Wall

IK 06	95000h L90B10
----------	------------------



8 W	
--------	--

Lm	K		Code
982	4000	45°	19.3141.0014
928	4000	60°	19.3141.0016
950	4000	95°	19.3141.0018

14 W	
---------	--

Lm	K		Code
1791	4000	45°	19.3141.0020
1691	4000	60°	19.3141.0022
1731	4000	95°	19.3141.0024

14 W	
---------	--

Lm	K		Code
1356	4000	25°	19.3141.0002
1624	4000	60°	19.3141.0004
1662	4000	95°	19.3141.0006

28 W	
---------	--

Lm	K		Code
2825	4000	25°	19.3141.0008
3383	4000	60°	19.3141.0010
3462	4000	95°	19.3141.0012


Beryl

Surface

Outdoor

Beryl proof Wall K

IK 06	95000h L90B10
----------	------------------



Lm	K		Code
982	4000	45°	19.3140.0018
928	4000	60°	19.3140.0020
950	4000	95°	19.3140.0022



Lm	K		Code
1791	4000	45°	19.3140.0024
1691	4000	60°	19.3140.0026
173	4000	95°	19.3140.0028





Lm	K		Code
1356	4000	25°	19.3140.0002
1624	4000	60°	19.3140.0004
166	4000	95°	19.3140.0008



Lm	K		Code
2825	4000	25°	19.3140.0010
3383	4000	60°	19.3140.0012
3462	4000	95°	19.3140.0016

Beryl N

IK 04	83000h L90B10
----------	------------------



20
W

Lm	K		Code
2047	4000	100°	19.3139.0001
2047	4000	100°	19.3139.0002

Beryl

Surface

Outdoor

LUXIONA **troll**



Features


Family of outdoor luminaires made of aluminium with powder paint finish, offering maximum resistance to atmospheric agents.

Kubik Wall Eco IP54: luminaire for LED lamp with G9 base and opal or PMMA diffuser. With movement sensor.

Kubik: luminaire with 1 to 4 light outputs to create lighting effects on vertical wall hangings. Different output angles choice.

Kubik Ceiling: surface luminaire for general lighting with LED technology.

Kubik Ceiling Ecoled: surface luminaire for general lighting designed for GU-10 lamp (not included).



Standard finishes

Add needed finish to complete the product reference.



Body: Aluminium

Installation: Wall / Ceiling / Surface

Also available on other typology_page 424, 442


Kubik Wall Eco IP54



IP
20

Lamp Holder G9

.34



15
W

 Code
110° 19.3019.1001

IP
54

IK
04


Lamp Holder G9

.34

.25


.04

.21




max
15W

 Code
115° 19.3165.0001
110° 19.3165.0003




max
15W

Code
19.3165.0005



max
15W

 Code
110° 19.3165.0006
115° 19.3165.0007



max
15W

 Code
110° 19.3165.0002
110° 19.3165.0004

Kubik

Surface

Outdoor

LUXIONA troll


Kubik



IP 65	IK 09	CRI ≥80	80000h L80B10
----------	----------	------------	------------------



DRIVER INCL.	220 240 V	50 60 Hz
-----------------	--------------	-------------



Lm	K	Beam Spread	Code
117	3000	40°	19.3153.0001
144	4000	40°	19.3153.0002
102	3000	10-37°	19.3153.0003
142	6500	10-37°	19.3153.0004
147	3000	40°	19.3153.0005
177	4000	40°	19.3153.0006
128	3000	10-37°	19.3153.0007
155	4000	10-37°	19.3153.0008
176	6500	10-37°	19.3153.0009



Lm	K	Beam Spread	Code
300	3000	40°	19.3153.0015
362	4000	40°	19.3153.0016
257	3000	10-37°	19.3153.0017
310	4000	10-37°	19.3153.0018
353	6500	10-37°	19.3153.0019



Lm	K	Beam Spread	Code
353	3000	40°	19.3153.0020
490	6500	40°	19.3153.0021
349	3000	10-37°	19.3153.0022



Lm	K	Beam Spread	Code
476	3000	40°	19.3153.0027
660	6500	40°	19.3153.0028
496	3000	10-37°	19.3153.0029
608	4000	10-37°	19.3153.0030
688	6500	10-37°	19.3153.0031




Lm	K	Beam Spread	Code
240	3000	40°	19.3153.0010
294	4000	40°	19.3153.0011
205	3000	10-37°	19.3153.0012
252	4000	10-37°	19.3153.0013
285	6500	10-37°	19.3153.0014



Lm	K	Beam Spread	Code
441	3000	40°	19.3153.0023
437	3000	10-37°	19.3153.0024
527	4000	10-37°	19.3153.0025
600	6500	10-37°	19.3153.0026



Lm	K	Beam Spread	Code
595	3000	40°	19.3153.0032
620	3000	10-37°	19.3153.0033
748	4000	10-37°	19.3153.0034
852	6500	10-37°	19.3153.0035



Lm	K	Beam Spread	Code
532	4000	40°	19.3169.0001
385	3000	10-37°	19.3169.0002
530	6500	10-37°	19.3169.0003




Lm	K	Beam Spread	Code
1060	6500	10-37°	19.3169.0004

Kubik Ceiling



IP 44	IK 04	CRI ≥85	SDCM 2	100000h L80B10
----------	----------	------------	-----------	-------------------

.34	.25	.04	.21	.22
-----	-----	-----	-----	-----



14 W

Lm	K	Beam Angle	Code
657	3000	115°	19.3149.0001
684	4000	115°	19.3149.0002

Kubik

Surface


Kubik Ceiling Ecoled



IP 54	IK 04
----------	----------

Lamp Holder GU10

.34	.25	.04
-----	-----	-----



15 W

Beam Angle	Code
110°	19.3148.0001
110°	19.3148.0002

Outdoor

LUXIONA troll

Pipe 65 N



Features

Body made of injected aluminium coated with dark grey powder paint. It includes a tempered glass diffuser and silicone gaskets. Prepared for GU10 lamp (not included).



Light source not included
Light source GU10 LED

Standard finishes

Add needed finish to complete the product reference.




Body: Aluminium

Installation: Ceiling / Surface



Pipe 65




max
7W

	Code
GU10	11.6105.1000

Surface



Outdoor



max
7W

	Code
GU10	11.6105.2000



Features

Body made of aluminium, highly resistant to oxidation, with a nanobonderite treatment and textured polyester powder painted finishes that offer maximum resistance against atmospheric agents and UV rays. It includes silicone gaskets and stainless steel screws. Diffuser made of transparent tempered glass. With a system that avoids condensation from alternate on-off cycles. To be installed on ground surface. Powered remotely.

CE	IP 67		
LED	CRI ≥90	SDCM 3	60000h L80B10

Standard finishes
Add needed finish to complete the product reference.

Body: Aluminium / Stainless Steel



Installation: Floor / Surface


Land S



24
VDC

Body: Stainless Steel


Land



2,1
W

Lm	K	▲	Code
80	3000	8°	11.2033.2310
104	3000	25°	11.2033.2311
94	3000	45°	11.2033.2313


Surface



8,4
W

Lm	K	▲	Code
666	3000	8°	11.2033.2320
642	3000	25°	11.2033.2321
564	3000	45°	11.2033.2322

Outdoor



Accessories

11.2033.0006
Nylon stake land

LUXIONA troll


Land

Land



24
VDC


Body: Aluminium



Lm	K	Beam Angle	Code
13	3000	100°	11.2033.1310



Lm	K	Beam Angle	Code
26	3000	95°	11.2033.1311



Lm	K	Beam Angle	Code
18	3000	100°	11.2033.1320




Lm	K	Beam Angle	Code
38	3000	95°	11.2033.1321



220
240
V

50
60
Hz




Body: Aluminium



Lm	K	Beam Angle	Code
54	3000	100°	11.2033.1330



Lm	K	Beam Angle	Code
109	3000	80°	11.2033.1331



Accessories

11.2033.0003
Nylon stake land 75

11.2033.0004
Nylon stake land 115

11.2033.0005
Nylon stake land 215



Land

Surface

Outdoor

LUXIONA troll

Torrero Building, Monzón. Spain

Smart Lighting

534
On - Off

535
TRIAC

536
1-10V

538
DALI

544
Wireless
Bluetooth

548
Wireless
RF

Smart Lighting



Since our beginnings, at Luxiona Group we have sought to create lighting solutions, whether products or services, that make the most of the infinite possibilities offered by light.

With this goal always in mind, over the last few years the focus of both the company and our brands has been on developing people-centred solutions, commonly known as Human Centric Lighting (HCL). We aspire to do much more than simply illuminate the environment, we want to control the effect that light has on humans, stimulating biological responses while respecting the environment. For

this reason, 100% of our products can integrate control systems that allow lighting to adapt to the needs of people and spaces; always providing the right quantity and quality of light for the moment and task at hand.

This Troll catalogue is a compendium of technologies designed with energy efficiency, comfort and safety as unquestionable qualities.

unquestionable qualities, offering solutions that allow remote management of lighting. lighting management.



In workspaces, where lighting has already become in one of the main tools to improve the mood, mental health and well-being of its occupants, products such as Optics Comfort, Domino, X-Line Slim Up & Down, and a long etcetera, can combine natural light with artificial light, the direct with the diffuse, so that a light-dark cycle is created as similar as possible to the progression of sunlight throughout the day, thus respecting the circadian rhythm.

The HCL aims to stimulate the different activities of the user, interconnecting all its elements, and collecting useful data on energy consumption, the conditions to which each environment is subjected and the type of use that will be given to it. Thanks to products such as Paralum and its control system, we can detect opportunities and make more strategic and efficient decisions in order to align ourselves with these natural rhythms already mentioned. By doing so, we can improve the health and well-being of occupants, thereby increasing their resilience and productivity.

But our sights are not limited to the personal or professional sphere. Regulatory systems in Health & Care products can help doctors and therapists during treatments, as well as speed up the healing process in patients, thanks to a greater sense of well-being.

Researchers and doctors have proven how the use of different colors in lighting has an effect on patients and healthcare professionals. Thus, a green or bluish light is ideal when surgeons work with monitors because it reduces reflections and improves contrast. A green wavelength helps the calming effect and reduces the pain sensation in patients. A yellow or amber light can also be used to create a relaxing atmosphere that helps the patient calm down before surgery.

So Troll makes the best advisers in its Projects Department available to users to:


- Connect and improve the customer's experience in lighting projects, providing a channel of communication and interaction.
- Preventive maintenance, allowing the detection of failures and inc

Smart Lighting Solutions



Esthetic

Lighting adjustment depending on the desired setting, either by modifying light levels or selecting different shades of light.



Scenographic

The new control systems allow the generation of personalized scenes for each user.



Emotional

Changes in the hue of light provoke relaxation or stimulation reactions in living beings and in people's spirits.



Comfort

Each user, event or activity that takes place in a given space will be unique.



Big Data

Connected lighting allows us to use technology (IoT) to collect, manage and analyze information: Space utility, Temperature and humidity data, pressure, noise, light levels, air composition, Traceability of space.



Security and maintenance

Integration of emergency lamps with general lighting in a single system, of: Monitoring and testing of lighting in real time. Simplify management and save installation costs.



Scalability

The new elements of connected lighting have plug & play technology, which allows you to expand the network without having to reconfigure it again.



Energy efficiency

Sustainability in energy saving as a most important parameter in the design of our architectural environments.



Connectivity

Through the use of wireless systems for the wireless operation of many elements, simplifying the complexity of the system installation. In addition, Smart Lighting systems can be managed and controlled centrally.



Flexibility

It allows adjusting the lighting of the place according to the needs required by the activity carried out, the contribution of natural light and the presence of activity through the use of light level and presence sensors.

**Auditorium of Institute
of Physics University
of Mikolaj Kopernik
Toruń, Poland**



**Cultural Centre
Kozienice, Poland**

**Polish Mother's Memorial
Hospital Research
Institute
Łódź, Poland**




**Architects
Dawidczyk & Partnerzy
Warsaw, Poland**

**Szczecin Główny Railway
Station
Szczecin, Poland**



**Posejdon
Szczecin, Poland**

**Hybrid operating rooms
Olsztyn, Poland**

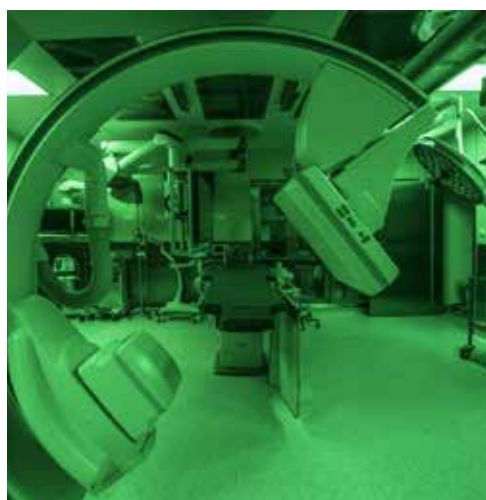

**Vizja Park
(University of Economics
and Human Sciences)
Warsaw, Poland**

ON - OFF

These devices are used to control the on and off of the installation. This need for control arises from the possibility of adapting the luminaires to different environments, times of the day and the energy savings it offers. This type of control systems are usually used for common areas, passageways, toilets ...

Sensors




11.1801.3001.00
Self-contained, surface-mounted
PIR Presence / Absence Sensor.
6A relay

TROLL PIR presence sensor. It allows the control (on and off) of 650W of non-dimmable LED luminaires. Simple group assignment via rotary switch. It has a 360° coverage angle that covers up to 7 meters in diameter, when mounted on the ceiling at 2.8m high



11.1801.3002.00
Self-contained, flush-mounted
PIR Presence / Absence Sensor.
6A relay



11.1801.3003.00 ⓘ
Intensive high altitude PIR sensor.


PIR presence sensor for high heights of TROLL, with intensive capture angle. It allows the control (on and off) of 500W of non-dimmable LED luminaires. It has a 360° angle that covers 5 meters in diameter, when mounted at a height of 20m.




11.1801.3004.00 ⓘ
Extensive high altitude PIR sensor.

PIR presence sensor for high heights of TROLL, with extensive capture angle. It allows the control (on and off) of 500W of non-dimmable LED luminaires. It has a 360° angle that covers 28 meters in diameter, when mounted 14m high.


Power Supply Devices




11.1801.7010.00
Voltage source on / off
220-240Vac / 24V 30W.
Independent use.




11.1801.7011.00
Voltage source on / off
220-240Vac/24V 60W.
Independent use.




11.1801.7012.00
Voltage source on / off
220-240Vac/24V 120W.
Independent use.




11.1801.7013.00
Voltage source on / off
220-240Vac/24V 180W.
Independent use.



71/LDT06024
Voltage source
120-240Vac/24V 60W.
Independent use.



71/LDT9624
Voltage source
120-240Vac/24V 96W.
Independent use.



71/LDT15024
Voltage source
120-240Vac/24V 150W.
Independent use.

TRIAC

TRIAC regulation systems allow you to create more welcoming environments, adapted to your personal tastes and requirements. Without the need for additional cables, it is a phase cut regulation, which cuts the 230V signal that enters the luminaire driver. Its operation is based on the cutting of the voltage wave at the beginning of the phase.

Switches & Controls




11.1801.1010.00

Panel with rotating element for TROLL Triac control (descending phase). Accessory designed to be embedded in a wall and capable of controlling halogen lamps (from 25W to 500W) and LED light sources (from 6W to 300W). It is powered by 220-240V and 50 / 60Hz mains voltage.

Rotary knob control via TRIAC

- TRIAC rotary mechanism
- With DIM TRIAC driver
- Maximum load: 300W

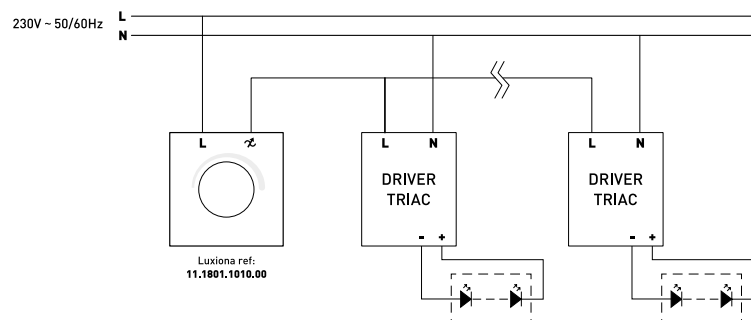

1-10V

The 0-10V or 1-10V control method is one of the simplest, thanks to the variation in direct current that allows the regulation of the light flux between 1 and 100% through an analog signal. As it is not possible to address it through software, the creation of groups is done through groups of wiring. Beyond regulating the light flux, it also allows you to control the on and off of luminaires.

Sustainability in energy saving as a most important parameter in the design of our architectural environments.

Switches & Controls



11.1801.1020.00

Panel with rotating element for 1-10V control of TROLL. Accessory designed to be embedded in a wall and capable of controlling a current of up to 50mA and connecting / disconnecting a max current of 5 A. It is powered at 220-240V and 50 / 60Hz mains voltage.

Sensors



11.1801.3020.00

Recessed

TROLL 1-10V light level sensor. It allows a simple and automatic constant light control from 200 to 600 lux with an opening angle of 45 °. Installation height: maximum 5 meters. It can be used with any 1-10V dimmable ballast or driver (each sensor can control up to 10 1-10V dimmable drivers). Significant energy savings can be achieved in various applications such as schools, offices, and hallways.



11.1801.3021.00


Surface



11.1801.3022.00

1-10V sensor for high altitudes
Extensive

1-10V light level sensor for high TROLL heights, with extensive pick-up angle. It allows a simple and automatic constant light control from 30 to 1000 lux with a 360° angle covering 28 meters in diameter, when mounted at 14m high. It can be used with any 1-10V dimmable ballast or driver (each sensor can control up to 20 1-10V dimmable drivers). Significant energy savings can be achieved in various applications, such as industry, warehouses, airports, and shopping centers.




11.1801.3023.00

1-10V sensor for high altitudes
Intensive

1-10V light level sensor for high TROLL heights, with intensive pick-up angle. It allows a simple and automatic constant light control from 30 to 1000 lux with a 360° angle covering 5 meters in diameter, when mounted at a height of 20m. It can be used with any 1-10V dimmable ballast or driver (each sensor can control up to 20 1-10V dimmable drivers). Significant energy savings can be achieved in various applications, such as industry, warehouses, airports, and shopping centers.


Regulation with rotary knob by 1-10V

- Rotary mechanism 1-10V
- With 1-10V DIM driver
- Installed power not exceeding 400 VA

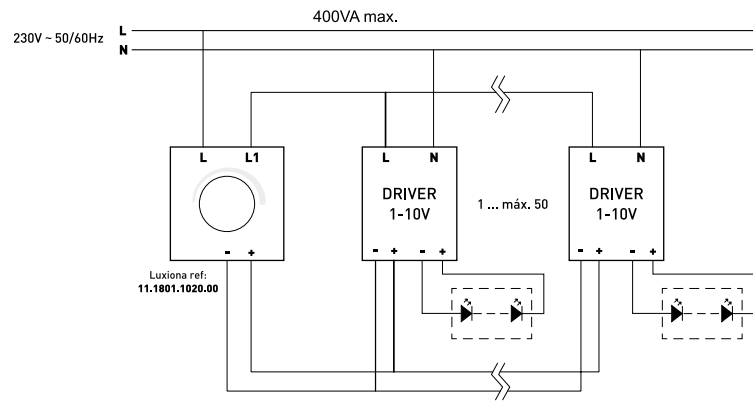

Regulation with autonomous sensor 1-10V

- With 1-10V DIM driver
- Detection angle 45°

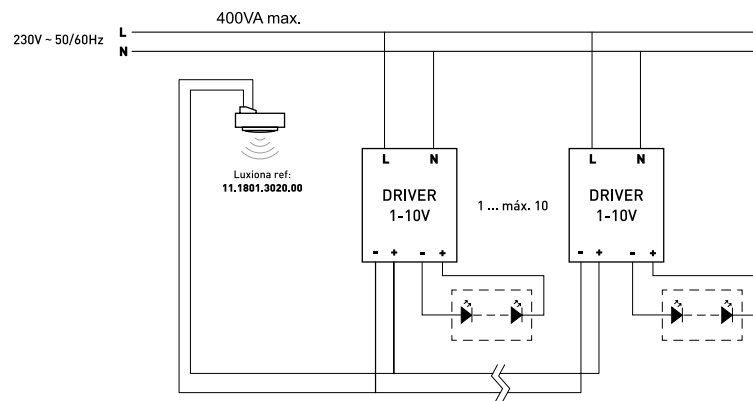


DALI

The DALI system allows planning an installation or lighting system with the possibility of easily modifying groups or scenes without the need for wiring. The versatility of its interface means that it can be used both in simple applications and in high-level applications, integrating through gateways into intelligent building control systems.

DALI uses a low-voltage bidirectional communication protocol in which the information runs from a controller to the lighting equipment that executes the orders and requests for information. It allows the lighting of the place to be adjusted according to the needs required by the activity carried out, the contribution of natural light and the presence of activity through the use of light level and presence sensors.

Wired Systems

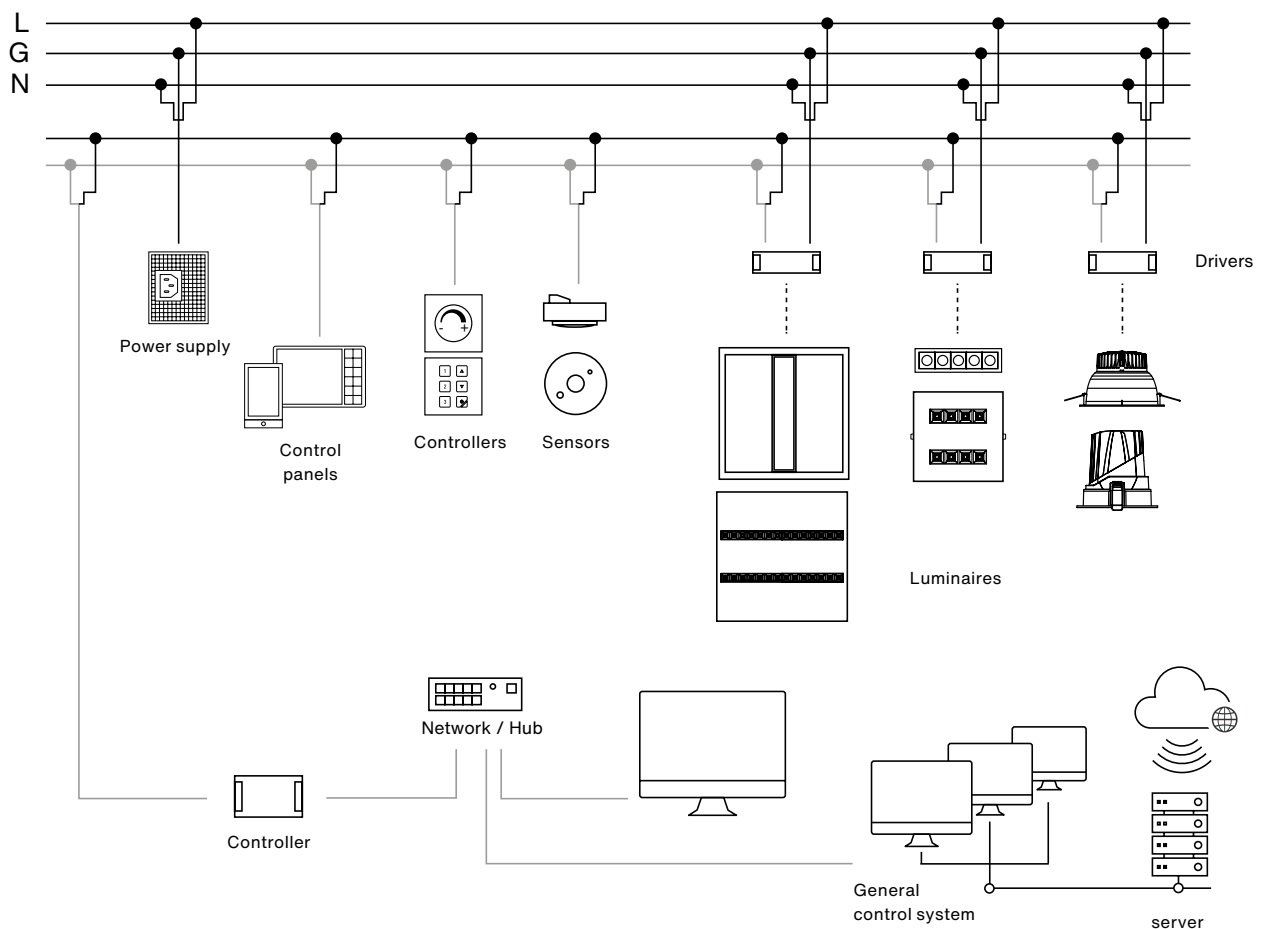

Switches & Controls



11.1801.1030.00

Panel with rotating element for TROLL DALI control. Accessory designed to be embedded in a wall and capable of controlling up to 64 unique addresses or 15 groups. It is powered through the DALI line.



11.1801.1031.00

Panel with rotating element for TROLL DALI control. Accessory designed to be embedded in a wall and capable of controlling up to 50 unique addresses or 15 groups. It is powered through the DALI line.



11.1801.1130.00

Touch panel for TROLL DALI control. Accessory designed to be embedded in a wall and capable of controlling up to 64 unique addresses or 15 groups. It is powered through the DALI line.



11.1801.1131.00

3 scenes

11.1801.1132.00

5 scenes

Troll touch hand controller.

Accessory designed to be installed on the wall and prepared for the control of groups of luminaires and pre-recorded scenes (3 scenes) with Multi-master capability to connect several control modules in the same DALI system. Easy individual adjustment of the control panel and button assignment by means of an internal rotary selector. The accessory has double terminals for continuous wiring.

It is powered through the DALI line. The keypad also has an infrared receiver which allows you to control the system using the remote control.



11.1801.1133.00

Panel with rotating element for TROLL DALI control. Accessory designed to be embedded in a wall and capable of controlling up to 50 unique addresses or 15 groups. It is powered through the DALI line.



11.1801.1231.00

Touch panel for TROLL DALI control. Accessory designed to be embedded in a wall and capable of controlling up to 64 unique addresses or 15 groups. It is powered through the DALI line.

Sensors

11.1801.3035.00 

ROLL presence and light level sensor. It allows simple and automatic control of constant light and presence detection (both can be disabled if necessary).

Simple group assignment via rotary switch with the possibility of multiple sensors in one group. One sensor can control up to 64 drivers. The sensor can be controlled remotely and individual parameter settings can be made using configuration software. Significant energy savings can be achieved in various applications, such as offices, schools, factories, airports, and shopping centers. Powered through the DALI Line.

It has a 360° coverage angle that covers up to 5m in diameter when installed on the ceiling at 2.5m high.

11.1801.4032.00 

Surface mounting frame for DALI sensor 11.1801.3035.00 from TROLL. Optional cover to reduce the area where motion is detected from 360° to 240°.

11.1801.3032.00 

DALI sensor for high altitudes

It allows simple and automatic control of constant light and presence detection (both can be disabled if necessary).

One sensor can control up to 64 drivers. The sensor can be controlled remotely and individual parameter settings can be made using configuration software. Significant energy savings can be achieved in various applications, such as offices, schools, factories, airports, and shopping centers. Powered through the DALI bus. It has two options a detection angle of 72° or 60° which covers up to 12-18m in diameter when installed on the ceiling at 8-18m high.

11.1801.4030.00 

Surface box for DALI sensor 11.1801.3032.00 from TROLL. Side threaded union with rubber gasket provides IP65 protection for industrial applications.

11.1801.4033.00 11.1801.4034.00 11.1801.4035.00 

Accessory for DALI sensor 11.1801.3032.00 from TROLL. The three different covers for maximum flexibility in all directions, at 0°, 90°, 180° and 270°. They can be attached and removed from the front of the sensor at any time.

Auxiliary Devices



11.1801.2030.00

4W DALI power supply for independent mounting. Accessory to supply 200 mA to DALI devices or control modules without their own power supply with the DALI standard IEC60929 (DALI V0) and IEC62386 (DALI V1). Powered at 230-240V; 50 / 60Hz.



11.1801.2031.00

USB interface module for DALI systems. Accessory for connecting software tools for addressing, programming and parameterization of DALI installations and TROLL devices. Power supply through DALI line.

11.1801.8034.00 

TROLL DALI input control. It allows 4 independent inputs for potential-free contacts. To integrate standard pushbuttons or switches. Power supply through the DALI line.

11.1801.8030.00 

Multichannel lighting controller for TROLL DALI devices. Independent lighting control of up to 192 devices on 3 DALI lines. Allows you to program scenes, calendar, HCL, RGB Tunable White and perform backups.



11.1801.8033.00 

Multichannel lighting controller for TROLL DALI devices. Independent lighting control of up to 192 devices on 3 DALI lines. Allows you to schedule scenes, calendar, HCL, RGB, Tunable White and make backup copies. Possibility of BAC-net integration and emergency lighting. (up to 50 emergency lighting devices)


11.1801.8038.00 

Dali actuator from TROLL. DALI relay output with 4 independent 10A switching contacts. 1 DALI address per changeover contact. Capable of controlling 2,000W / 10 A (ohmic load).


Power Supply Devices




11.1801.7030.00
DALI / push voltage source DALI
220-240Vac / 24V 35W.
Independent use.




11.1801.7031.00
DALI / push voltage source DALI
220-240Vac / 24V 60W.
Independent use.




11.1801.7032.00
DALI / push voltage source DALI
220-240Vac/24V 100W.




11.1801.7033.00
DALI / push voltage source DALI
220-240Vac / 24V 150W.
Independent use.




11.1801.7034.00
DALI TW
220-240Vac/24V 150W.
Independent use.




11.1801.7035.00
DALI RGB
220-240Vac/24V 50W.
Independent use.



11.1801.7036.00
DALI RGB
220-240Vac/24V 80W.
Independent use.



11.1801.7132.00
DALI / push voltage source
DALI 220-240Vac / 24V
IP66 100W.
Independent use.




11.1801.7133.00
DALI / push voltage source
DALI 220-240Vac / IP66
210 W.
Independent use.



WIRELESS BLUETOOTH

Bluetooth wireless systems are made up of switches, relays, 0-10V / DALI dimmers, 24V DC PWM dimmers, controllers, timers and presence and / or brightness sensors. All these components work with Bluetooth Mesh wireless technology and can be programmed and controlled through your app.

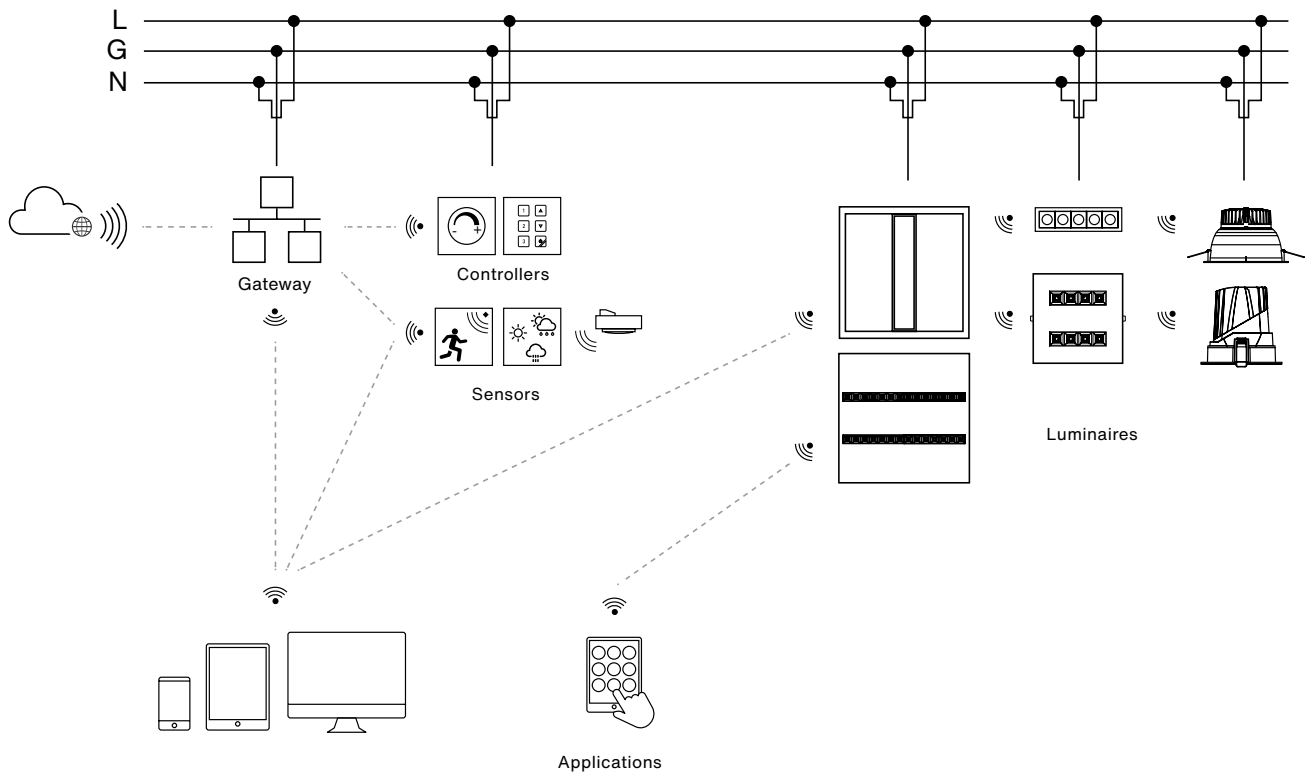

Apps



Download
the Casambi App



Download
the Tridonic App



Download
the Casambi App




Download
the Tridonic App

Switches & Controls



11.1801.1101.22 

TROLL wireless bluetooth wireless push button. It has 1 pushbutton that allows the on and off control of a function such as individual luminaire, groups, scenes or sequences. Glued or screwed surface installation. Power supply by electrodynamic conversion of the kinetic energy of the keystroke.




11.1801.1101.33 



11.1801.1102.22 

TROLL wireless bluetooth wireless push button. It has 2 pushbuttons that allow the on and off control of two functions such as individual luminaires, groups, scenes or sequences. Glued or screwed surface installation. Power supply by electrodynamic conversion of the kinetic energy of the keystroke.



11.1801.1102.33 



11.1801.1040.00 

Panel with rotating element wireless bluetooth of TROLL. Accessory designed to be embedded in a wall and capable of controlling groups or scenes. It is powered by 220-240V and 50 / 60Hz mains voltage.



11.1801.1134.04 

Wireless keypad 4 wireless bluetooth functions with TROLL battery.

It allows the on and off of four functions such as individual luminaires, groups, scenes or sequences. By means of the + or - it is possible to regulate the luminosity of each one of them. By means of the <or> icons, they allow the temperature change in Tuneable White luminaires. Glued or screwed surface installation.



11.1801.1134.33 

Sensors



11.1801.3041.00
Recessed

TROLL wireless light level and presence wireless bluetooth sensor. It allows activating luminaires individually, in groups or scenes by detecting presence and / or regulating their brightness value according to the contribution of natural light and / or according to the circadian cycle. It has a 360° angle that covers 6 meters in diameter, when mounted 2.5m high.



11.1801.3100.00 
Surface



11.1801.3101.00 
Wireless sensor for great heights. Intensive.
Wireless wireless bluetooth sensor of light level and presence for high heights of TROLL, with intensive capture angle. It allows activating luminaires individually, in groups or scenes by detecting presence and / or regulating their brightness value according to the contribution of natural light and / or according to the circadian cycle. It has a 360° angle that covers 5 meters in diameter, when mounted at a height of 20m.



11.1801.3102.00 
Wireless sensor for great heights. Extensive.
Wireless wireless bluetooth light level and presence sensor for high heights of TROLL, with extensive capture angle. It allows activating luminaires individually, in groups or scenes by detecting presence and / or regulating their brightness value according to the contribution of natural light and / or according to the circadian cycle. It has a 360° angle that covers 28 meters in diameter, when mounted 14m high.

Auxiliary Devices



11.1801.5030.00

Bluetooth communication interface for dimmable drivers using the 0-10V, 1-10V, or DALI protocol. The elements communicate with each other forming a communication network of up to 127 nodes. It can be controlled through an app with Android or iOS devices.



11.1801.5032.00 
Wireless bluetooth communication interface for 2 DALI outputs of TROLL. Automatically establishes a wireless communication network with up to 250 nodes. It can be controlled through an app with Android or iOS devices.



11.1801.5031.00 
Wireless bluetooth communication interface for 4 TROLL PWM outputs. Output current max. 6 A (free distribution in the channels). Automatically establishes a wireless communication network with up to 250 nodes. It can be controlled through an app with Android or iOS devices.



11.1801.8100.00 
TROLL wireless bluetooth communication gateway. Allows remote access to a facility. For its start-up, it requires a screen connected by HDMI and a fixed wireless connection for remote access at any time. The gateway is accessed over the internet (WIFI, LAN or 4G). Supports connection to 2 wireless bluetooth networks simultaneously.

Auxiliary Devices



11.1801.8101.00

Timer de comunicación wireless bluetooth de TROLL. Permite mantener la memoria con reloj interno cuando se pierde la alimentación. Cuando vuelve la luz, se encarga de poner en marcha nuevamente la programación y escenas. Entrada de pulsador programable. 24h autonomía.



11.1801.1136.04


Smart dimmer for luminaires with wireless bluetooth plug from TROLL. Allows dimmable LED and CFL bulbs: 150W at 230Vac; and 70W at 110Vac. It can be controlled through an app with Android or iOS devices.



11.1801.1136.33


Power Supply Devices

IP
20




11.1801.7050.00

Wireless Bluetooth voltage source. 220-240Vac / 24V 35W Independent use.




11.1801.7051.00

Wireless Bluetooth voltage source. 220-240Vac / 24V 60W Independent use.



11.1801.7052.00

Wireless Bluetooth voltage source. 220-240Vac / 24V 100W Independent use.



11.1801.7053.00

Wireless Bluetooth voltage source. 220-240Vac / 24V 150W Independent use.

Smart Lighting

LUXIONA troll

WIRELESS RF

RF wireless systems are made up of remote controls, keypads, dimmers and amplifiers. This type of hybrid system allows us to easily create scenes, modify RGB color, set a tuneable white change and modify the attenuation. They provide radio frequency coverage in areas where wiring is not possible.

Switches & Controls



11.1655.0003.00

TROLL RGBW remote control. The remote control has 4 different zones that can select Red / Green / Blue / White colors directly. It also has 3 memories (S1, S2 and S3 buttons) to record colors or pre-programmed scenes. You can also select a color from the wheel or set a dynamic color change. The controller can be adapted to a 3-channel (RGB) or 4-channel (RGBW) output system.



11.1655.0002.00

RGBW touch panel by TROLL. Accessory designed to be installed on a recessed wall and prepared to control up to 20 units of the RGB controller 11.1655.0001.00 via RF. It is powered by mains voltage 110-240V 50 / 50Hz.



11.1655.0005.00

Tuneable white touch panel by TROLL. Accessory designed to be installed in a recessed wall and prepared to control up to 20 units of the RGB controller 11.1655.0001.00 via RF. It is powered by mains voltage 110-240V 50 / 50Hz.



11.1655.0006.00

TROLL TW remote control. The remote has 4 different zones to group controllers directly. It also has 3 memories (S1, S2 and S3 buttons) to record colors or pre-programmed scenes. You can also select a color from the wheel or set a dynamic color change. The remote can be adapted to a 3-channel or 4-channel output system.

Auxiliary Devices



11.1655.0001.00

Master dimmer for RGB LEDs, RGBW or Tuneable white (TW) powered at 12-24V. It communicates by RF with the buttons and controls 11.1655.0002.00 and 11.1655.0003.00 (RGB and RGBW) and 11.1655.0005.00 and 11.1655.0006.00 (TW).



11.1655.0004.00

Signal amplifier for installations with RGB, RGBW and Tuneable white powered at 12-24V. accessory for regulator 11.1655.0001.00.



Reference Index

Reference Index

Reference	Page	Reference	Page	Reference	Page	Reference	Page
11.0030.1401	395	11.0779.3321	419	11.1523.8366	101	11.1606.0002.22	413
11.0030.1402	395	11.0779.3331	419	11.1523.8412	101	11.1606.1831	413
11.0030.1403	395	11.0779.3341	419	11.1523.8424	101	11.1606.1832	413
11.0030.1404	395	11.0779.4311	419	11.1523.8436	101	11.1606.1841	413
11.0030.1411	395	11.0779.4321	419	11.1523.8462	101	11.1606.1842	413
11.0030.1412	395	11.0779.4331	419	11.1523.8464	101	11.1606.2831	413
11.0030.1413	395	11.0779.4341	419	11.1523.8466	101	11.1606.2832	413
11.0030.1414	395	11.0779.5311	419	11.1525.1301	189	11.1606.2841	413
11.0030.2401	395	11.0779.5321	419	11.1525.1311	189	11.1606.2842	413
11.0030.2402	395	11.0779.5331	419	11.1525.1401	189	11.1606.3831	413
11.0030.2403	395	11.0779.5341	419	11.1525.1411	189	11.1606.3832	413
11.0030.2404	395	11.1400.2000	317	11.1536.0031	109	11.1606.3841	413
11.0030.2411	395	11.1426.0001	95	11.1536.0032	109	11.1606.3842	413
11.0030.2412	395	11.1426.0002	95	11.1536.0033	109	11.1606.4881	412
11.0030.2413	395	11.1426.1311	95	11.1536.0041	109	11.1606.6311	414
11.0030.2414	395	11.1426.1321	95	11.1536.0042	109	11.1606.6313	414
11.0030.3401	395	11.1426.1341	95	11.1536.0043	109	11.1611.0001	508
11.0030.3402	395	11.1426.1411	95	11.1536.0131	109	11.1611.0002	508
11.0030.3403	395	11.1426.1421	95	11.1536.0141	109	11.1645.0001	260
11.0030.3404	395	11.1426.1441	95	11.1536.0331	109	11.1645.0002	260
11.0030.3411	395	11.1426.3311	95	11.1536.0341	109	11.1645.0003	260
11.0030.3412	395	11.1426.3321	95	11.1546.3100	163	11.1645.0100	259
11.0030.3413	395	11.1426.3341	95	11.1546.3101	163	11.1645.2211	259
11.0030.3414	395	11.1426.3411	95	11.1546.3108	163	11.1645.2221	259
11.0147.1311	187	11.1426.3421	95	11.1546.3150	163	11.1645.2311	259
11.0147.1312	187	11.1426.3441	95	11.1546.3151	163	11.1645.2321	259
11.0147.1313	187	11.1450.2000	317	11.1546.3158	163	11.1645.2411	259
11.0147.1411	187	11.1453.2411	316	11.1546.3240	163	11.1645.2421	259
11.0147.1412	187	11.1453.2421	316	11.1546.3241	163	11.1645.5211	259
11.0147.1413	187	11.1453.2431	316	11.1546.3248	163	11.1645.5221	259
11.0280.0302	317	11.1453.2441	316	11.1546.3350	163	11.1645.5231	259
11.0280.0303	317	11.1453.2451	316	11.1546.3351	163	11.1645.5311	259
11.0280.0304	317	11.1453.2461	316	11.1546.3358	163	11.1645.5321	259
11.0280.0305	317	11.1453.2471	316	11.1546.3420	163	11.1645.5331	259
11.0280.0307	317	11.1453.2481	316	11.1546.3421	163	11.1645.5411	259
11.0280.0311	317	11.1455.2411	316	11.1546.3428	163	11.1645.5421	259
11.0280.0312	317	11.1455.2421	316	11.1546.4100	163	11.1645.5431	259
11.0281.0005	317	11.1455.2431	316	11.1546.4101	163	11.1655.0001.00	413, 548
11.0281.0008	317	11.1455.2441	316	11.1546.4108	163	11.1655.0002.00	413, 548
11.0281.0205	317	11.1455.2451	316	11.1546.4150	163	11.1655.0003.00	413, 548
11.0281.0208	317	11.1455.2461	316	11.1546.4151	163	11.1655.0004.00	413, 548
11.0282.1505	316	11.1455.2471	316	11.1546.4158	163	11.1655.0005.00	548
11.0282.1508	316	11.1455.2481	316	11.1546.4240	163	11.1655.0006.00	548
11.0283.1505	316	11.1457.2411	316	11.1546.4241	163	11.1670.1411	127
11.0283.1508	316	11.1457.2421	316	11.1546.4248	163	11.1670.1421	127
11.0452.1001	173	11.1457.2431	316	11.1546.4350	163	11.1670.1431	127
11.0452.1001.04	73	11.1457.2441	316	11.1546.4351	163	11.1670.1441	127
11.0452.1002	173	11.1457.2451	316	11.1546.4358	163	11.1670.1451	127
11.0452.1003	173	11.1457.2461	316	11.1546.4420	163	11.1670.1461	127
11.0779.0001	418	11.1457.2471	316	11.1546.4421	163	11.1670.1471	127
11.0779.1311	419	11.1457.2481	316	11.1546.4428	163	11.1670.1481	127
11.0779.1321	419	11.1523.0002	101	11.1605.0031	347	11.1670.2411	127
11.0779.1331	419	11.1523.8312	101	11.1605.0032	347	11.1670.2421	127
11.0779.1341	419	11.1523.8324	101	11.1605.0041	347	11.1670.2431	127
11.0779.2311	419	11.1523.8336	101	11.1605.0042	347	11.1670.2441	127
11.0779.2313	419	11.1523.8362	101	11.1605.1901	347	11.1670.2451	127
11.0779.3311	419	11.1523.8364	101	11.1606.0001.22	413	11.1670.2461	127

Reference	Page	Reference	Page	Reference	Page	Reference	Page
11.1670.2471	127	11.1671.3308	125	11.1701.5213	175	11.1710.1321	103
11.1670.2481	127	11.1671.3401	125	11.1701.5221	175	11.1710.1341	103
11.1670.3411	127	11.1671.3402	125	11.1701.5223	175	11.1710.1411	103
11.1670.3421	127	11.1671.3403	125	11.1701.5241	175	11.1710.1421	103
11.1670.3431	127	11.1671.3404	125	11.1701.5243	175	11.1710.1441	103
11.1670.3441	127	11.1671.3405	125	11.1701.5311	175	11.1710.2311	103
11.1670.3451	127	11.1671.3406	125	11.1701.5313	175	11.1710.2321	103
11.1670.3461	127	11.1671.3407	125	11.1701.5321	175	11.1710.2341	103
11.1670.3471	127	11.1671.3408	125	11.1701.5323	175	11.1710.2411	103
11.1670.3481	127	11.1673.3311	409	11.1701.5341	175	11.1710.2421	103
11.1670.4411	127	11.1673.3312	409	11.1701.5343	175	11.1710.2441	103
11.1670.4421	127	11.1673.3313	409	11.1703.1009	181	11.1710.3311	103
11.1670.4431	127	11.1673.3314	409	11.1703.1301	181	11.1710.3321	103
11.1670.4441	127	11.1673.3316	409	11.1703.1302	181	11.1710.3341	103
11.1670.4451	127	11.1701.1211	175	11.1703.1303	181	11.1710.3411	103
11.1670.4461	127	11.1701.1221	175	11.1703.1304	181	11.1710.3421	103
11.1670.4471	127	11.1701.1241	175	11.1703.1401	181	11.1710.3441	103
11.1670.4481	127	11.1701.1311	175	11.1703.1402	181	11.1801.1010.00	535
11.1670.5411	127	11.1701.1321	175	11.1703.1403	181	11.1801.1020.00	536
11.1670.5421	127	11.1701.1341	175	11.1703.1404	181	11.1801.1030.00	539
11.1670.5431	127	11.1701.2211	175	11.1703.2009	181	11.1801.1031.00	539
11.1670.5441	127	11.1701.2213	175	11.1703.2301	181	11.1801.1040.00	545
11.1670.5451	127	11.1701.2221	175	11.1703.2302	181	11.1801.1101.22	545
11.1670.5461	127	11.1701.2223	175	11.1703.2303	181	11.1801.1101.33	545
11.1670.5471	127	11.1701.2241	175	11.1703.2304	181	11.1801.1102.22	545
11.1670.5481	127	11.1701.2243	175	11.1703.2401	181	11.1801.1102.33	545
11.1670.6411	127	11.1701.2311	175	11.1703.2402	181	11.1801.1130.00	539
11.1670.6421	127	11.1701.2313	175	11.1703.2403	181	11.1801.1131.00	539
11.1670.6431	127	11.1701.2321	175	11.1703.2404	181	11.1801.1132.00	539
11.1670.6441	127	11.1701.2323	175	11.1703.3301	181	11.1801.1133.00	539
11.1670.6451	127	11.1701.2341	175	11.1703.3302	181	11.1801.1134.04	545
11.1670.6461	127	11.1701.2343	175	11.1703.3303	181	11.1801.1134.33	545
11.1670.6471	127	11.1701.3211	175	11.1703.3304	181	11.1801.1136.04	547
11.1670.6481	127	11.1701.3213	175	11.1703.3401	181	11.1801.1136.33	547
11.1671.3101	125	11.1701.3221	175	11.1703.3402	181	11.1801.1231.00	539
11.1671.3102	125	11.1701.3223	175	11.1703.3403	181	11.1801.2030.00	541
11.1671.3103	125	11.1701.3241	175	11.1703.3404	181	11.1801.2031.00	541
11.1671.3104	125	11.1701.3243	175	11.1704.1121	179	11.1801.3001.00	534
11.1671.3105	125	11.1701.3311	175	11.1704.1122	179	11.1801.3002.00	534
11.1671.3106	125	11.1701.3313	175	11.1704.1123	179	11.1801.3003.00	534
11.1671.3107	125	11.1701.3321	175	11.1704.1131	179	11.1801.3004.00	534
11.1671.3108	125	11.1701.3323	175	11.1704.1132	179	11.1801.3020.00	536
11.1671.3201	125	11.1701.3341	175	11.1704.1133	179	11.1801.3021.00	536
11.1671.3202	125	11.1701.3343	175	11.1704.1141	179	11.1801.3022.00	536
11.1671.3203	125	11.1701.4211	175	11.1704.1142	179	11.1801.3023.00	536
11.1671.3204	125	11.1701.4213	175	11.1704.1143	179	11.1801.3032.00	540
11.1671.3205	125	11.1701.4221	175	11.1704.4121	179	11.1801.3035.00	540
11.1671.3206	125	11.1701.4223	175	11.1704.4122	179	11.1801.3041.00	546
11.1671.3207	125	11.1701.4241	175	11.1704.4123	179	11.1801.3100.00	546
11.1671.3208	125	11.1701.4243	175	11.1704.4131	179	11.1801.3101.00	546
11.1671.3301	125	11.1701.4311	175	11.1704.4132	179	11.1801.3102.00	546
11.1671.3302	125	11.1701.4313	175	11.1704.4133	179	11.1801.4030.00	540
11.1671.3303	125	11.1701.4321	175	11.1704.4141	179	11.1801.4032.00	540
11.1671.3304	125	11.1701.4323	175	11.1704.4142	179	11.1801.4033.00	540
11.1671.3305	125	11.1701.4341	175	11.1704.4143	179	11.1801.4034.00	540
11.1671.3306	125	11.1701.4343	175	11.1710.0004	103	11.1801.4035.00	540
11.1671.3307	125	11.1701.5211	175	11.1710.1311	103	11.1801.5030.00	546

Reference Index

Reference	Page	Reference	Page	Reference	Page	Reference	Page
11.1801.5031.00	546	11.1803.5311	153	11.1930.3311	139	11.1936.2003	150
11.1801.5032.00	546	11.1803.5321	153	11.1930.3321	139	11.1936.2101	150
11.1801.7010.00	534	11.1803.5331	153	11.1930.3331	139	11.1936.2201	150
11.1801.7011.00	413, 534	11.1803.5411	153	11.1930.3411	139	11.1936.2301	150
11.1801.7012.00	534	11.1803.5421	153	11.1930.3421	139	11.1936.2331	147
11.1801.7013.00	534	11.1803.5431	153	11.1930.3431	139	11.1936.2431	147
11.1801.7014	121	11.1803.6311	153	11.1930.4311	139	11.1936.3001	148
11.1801.7015	121	11.1803.6321	153	11.1930.4321	139	11.1936.3002	149
11.1801.7030.00	542	11.1803.6331	153	11.1930.4331	139	11.1936.3003	149
11.1801.7031.00	542	11.1803.6411	153	11.1930.4411	139	11.1936.3004	148
11.1801.7032.00	542	11.1803.6421	153	11.1930.4421	139	11.1936.3005	149
11.1801.7033.00	542	11.1803.6431	153	11.1930.4431	139	11.1936.3331	147
11.1801.7034.00	542	11.1833.1311	129	11.1930.5311	139	11.1936.3431	147
11.1801.7035.00	542	11.1833.1411	129	11.1930.5321	139	11.1937.1311	142
11.1801.7036.00	542	11.1833.2311	129	11.1930.5331	139	11.1937.1321	142
11.1801.7050.00	547	11.1833.2411	129	11.1930.5411	139	11.1937.1331	142
11.1801.7051.00	547	11.1833.3311	129	11.1930.5421	139	11.1937.1411	142
11.1801.7052.00	547	11.1833.3411	129	11.1930.5431	139	11.1937.1421	142
11.1801.7053.00	547	11.1833.4311	129	11.1931.1311	140	11.1937.1431	142
11.1801.7132.00	542	11.1833.4411	129	11.1931.1321	140	11.1937.3311	142
11.1801.7133.00	542	11.1839.1921	105	11.1931.1331	140	11.1937.3321	142
11.1801.8030.00	541	11.1839.1923	105	11.1931.1411	140	11.1937.3331	142
11.1801.8033.00	541	11.1839.1925	105	11.1931.1421	140	11.1937.3411	142
11.1801.8034.00	541	11.1839.1931	105	11.1931.1431	140	11.1937.3421	142
11.1801.8038.00	541	11.1839.1933	105	11.1931.2311	140	11.1937.3431	142
11.1801.8100.00	546	11.1839.1935	105	11.1931.2321	140	11.1937.4311	143
11.1801.8101.00	547	11.1839.1941	105	11.1931.2331	140	11.1937.4321	143
11.1803.1311	241	11.1839.1943	105	11.1931.2411	140	11.1937.4331	143
11.1803.1321	241	11.1839.1945	105	11.1931.2421	140	11.1937.4411	143
11.1803.1331	241	11.1910.1093	335	11.1931.2431	140	11.1937.4421	143
11.1803.1341	241	11.1910.1193	335	11.1931.3311	140	11.1937.4431	143
11.1803.1411	241	11.1910.1300	335	11.1931.3321	140	11.1937.6311	143
11.1803.1421	241	11.1910.1493	335	11.1931.3331	140	11.1937.6321	143
11.1803.1431	241	11.1910.2093	335	11.1931.3411	140	11.1937.6331	143
11.1803.1441	241	11.1910.2193	335	11.1931.3421	140	11.1937.6411	143
11.1803.2311	241	11.1910.2293	335	11.1931.3431	140	11.1937.6421	143
11.1803.2321	241	11.1910.2300	335	11.1931.4311	140	11.1937.6431	143
11.1803.2331	241	11.1910.2493	335	11.1931.4321	140	11.1965.1241	186
11.1803.2341	241	11.1912.2031	263	11.1931.4331	140	11.1965.1341	186
11.1803.2411	241	11.1912.3031	263	11.1931.4411	140	11.1965.1441	186
11.1803.2421	241	11.1912.4031	263	11.1931.4421	140	11.2003.2301	351
11.1803.2431	241	11.1914.1301	331	11.1931.4431	140	11.2003.3301	350
11.1803.2441	241	11.1914.2301	331	11.1931.5311	140	11.2003.4001	353
11.1803.3311	241	11.1914.3301	331	11.1931.5321	140	11.2008.0001	118
11.1803.3321	241	11.1914.4301	331	11.1931.5331	140	11.2008.0002	118
11.1803.3331	241	11.1930.1311	139	11.1931.5411	140	11.2008.0400	118
11.1803.3341	241	11.1930.1321	139	11.1931.5421	140	11.2008.0401	118
11.1803.3411	241	11.1930.1331	139	11.1931.5431	140	11.2008.0402	118
11.1803.3421	241	11.1930.1411	139	11.1936.0000	147	11.2008.0403	118
11.1803.3431	241	11.1930.1421	139	11.1936.0010	147	11.2008.0404	118
11.1803.3441	241	11.1930.1431	139	11.1936.0020	147	11.2008.0422	117
11.1803.4311	153	11.1930.2311	139	11.1936.0060	147	11.2008.0423	117
11.1803.4321	153	11.1930.2321	139	11.1936.1001	148	11.2008.0522	117
11.1803.4331	153	11.1930.2331	139	11.1936.1002	148	11.2008.0622	117
11.1803.4411	153	11.1930.2411	139	11.1936.1331	147	11.2008.0722	117
11.1803.4421	153	11.1930.2421	139	11.1936.1431	147	11.2008.0822	117
11.1803.4431	153	11.1930.2431	139	11.1936.2001	150	11.2008.1301	120

Reference	Page	Reference	Page	Reference	Page	Reference	Page
11.2008.1302	120	11.2032.1311	501	11.2645.2411	259	11.2965.1321	239
11.2008.1303	120	11.2032.1312	501	11.2645.2421	259	11.2965.1331	239
11.2008.1401	120	11.2032.1313	501	11.2645.2431	259	11.2965.1411	239
11.2008.1402	120	11.2032.1314	501	11.2645.5211	259	11.2965.1421	239
11.2008.1403	120	11.2032.1315	501	11.2645.5221	259	11.2965.1431	239
11.2008.2311	120	11.2032.2311	491	11.2645.5231	259	11.2965.2211	239
11.2008.2321	120	11.2032.2312	491	11.2645.5311	259	11.2965.2221	239
11.2008.2331	120	11.2032.2313	492	11.2645.5321	259	11.2965.2231	239
11.2008.2411	120	11.2032.2314	492	11.2645.5331	259	11.2965.2311	239
11.2008.2421	120	11.2032.2315	492	11.2645.5411	259	11.2965.2321	239
11.2008.2431	120	11.2033.0003	526	11.2645.5421	259	11.2965.2331	239
11.2008.3311	118	11.2033.0004	526	11.2645.5431	259	11.2965.2411	239
11.2008.3321	118	11.2033.0005	526	1138470001	195	11.2965.2421	239
11.2008.3411	118	11.2033.0006	525	1138470002	195	11.2965.2431	239
11.2008.3421	118	11.2033.1310	526	1138470003	195	11.3645.2211	260
11.2008.4311	118	11.2033.1311	526	1138470004	195	11.3645.2221	260
11.2008.4321	118	11.2033.1320	526	1138470005	195	11.3645.2231	260
11.2008.4411	118	11.2033.1321	526	1138471301	195	11.3645.2241	260
11.2008.4421	118	11.2033.1330	526	1138471302	195	11.3645.2311	260
11.2008.5311	119	11.2033.1331	526	1138471303	195	11.3645.2321	260
11.2008.5321	119	11.2033.2310	525	1138471311	195	11.3645.2331	260
11.2008.5411	119	11.2033.2311	525	1138471312	195	11.3645.2341	260
11.2008.5421	119	11.2033.2313	525	1138471313	195	11.3645.2411	260
11.2008.6311	119	11.2033.2320	525	1138471401	195	11.3645.2421	260
11.2008.6321	119	11.2033.2321	525	1138471402	195	11.3645.2431	260
11.2008.6331	119	11.2033.2322	525	1138471403	195	11.3645.2441	260
11.2008.6351	120	11.2034.0001	513	1138471411	195	11.3645.5211	260
11.2008.6411	119	11.2046.3120	165	1138471412	195	11.3645.5221	260
11.2008.6421	119	11.2046.3121	165	1138471413	195	11.3645.5231	260
11.2008.6431	119	11.2046.3128	165	1138472301	195	11.3645.5241	260
11.2008.6451	120	11.2046.3240	165	1138472302	195	11.3645.5311	260
11.2008.7301	121	11.2046.3241	165	1138472303	195	11.3645.5321	260
11.2008.7401	121	11.2046.3248	165	1138472311	195	11.3645.5331	260
11.2014.0031	346	11.2046.3320	165	1138472312	195	11.3645.5341	260
11.2014.0041	346	11.2046.3321	165	1138472313	195	11.3645.5411	260
11.2016.1301	329	11.2046.3328	165	1138472401	195	11.3645.5421	260
11.2016.2301	329	11.2046.3420	165	1138472402	195	11.3645.5431	260
11.2026.0001	95	11.2046.3421	165	1138472403	195	11.3645.5441	260
11.2026.1311	95	11.2046.3428	165	1138472411	195	11.4694.0001	355
11.2026.1321	95	11.2046.4120	165	1138472412	195	11.5000.1001	507
11.2026.1331	95	11.2046.4121	165	1138472413	195	11.5000.1301	511
11.2026.1411	95	11.2046.4128	165	1138473301	195	11.5000.1302	511
11.2026.1421	95	11.2046.4240	165	1138473302	195	11.5000.1303	511
11.2026.1431	95	11.2046.4241	165	1138473303	195	11.5000.1311	475
11.2026.2311	95	11.2046.4248	165	1138473311	195	11.5000.1312	475
11.2026.2321	95	11.2046.4320	165	1138473312	195	11.5000.1313	475
11.2026.2331	95	11.2046.4321	165	1138473313	195	11.5000.2310	472
11.2026.2411	95	11.2046.4328	165	1138473401	195	11.5000.2320	472
11.2026.2421	95	11.2046.4420	165	1138473402	195	11.5000.2330	472
11.2026.2431	95	11.2046.4421	165	1138473403	195	11.5000.2340	471
11.2027.0001	105	11.2046.4428	165	1138473411	195	11.5000.5000	471
11.2032.0001.00	491	11.2645.2211	259	1138473412	195	11.5100.2411	417
11.2032.0002.00	491	11.2645.2221	259	1138473413	195	11.5100.2431	417
11.2032.0003.00	492	11.2645.2231	259	11.2965.1211	239	11.5100.2441	417
11.2032.0004.00	492	11.2645.2311	259	11.2965.1221	239	11.5100.2451	417
11.2032.0005.00	492	11.2645.2321	259	11.2965.1231	239	11.5100.2461	417
11.2032.0006.00	491	11.2645.2331	259	11.2965.1311	239	11.5100.2471	417

Reference Index

Reference	Page	Reference	Page	Reference	Page	Reference	Page
11.5201.0001	477, 479	11.5203.4381	495	11.7851.1082	361	11.7891.1082	360
11.5201.0002	477, 479	11.5203.5000	487	11.7851.1083	361	11.7891.1083	360
11.5201.0003	477, 479, 481	11.5204.1313.20	493	11.7851.1084	361	11.7891.1084	360
11.5201.1311	479	11.5204.2311.20	493	11.7851.1086	361	11.7891.1086	360
11.5201.1312	479	11.6105.0001	508	11.7851.1301	362	11.7891.1301	359
11.5201.1321	479	11.6105.0002	508	11.7851.1582	361	11.7891.1401	359
11.5201.1322	479	11.6105.0003	508	11.7851.1583	361	11.7891.1581	360
11.5201.2000.00	479	11.6105.0011	509	11.7851.1584	361	11.7891.1582	360
11.5201.2311	479	11.6105.0012	509	11.7851.1586	361	11.7891.1583	360
11.5201.2312	479	11.6105.0013	509	11.7851.2082	361	11.7891.1584	360
11.5201.2321	479	11.6105.1000	523	11.7851.2083	361	11.7891.1586	360
11.5201.2322	479	11.6105.2000	523	11.7851.2084	361	11.7891.2081	360
11.5201.3301	480	11.6105.2300	507	11.7851.2086	361	11.7891.2082	360
11.5201.3311	480	11.6600.2083	441	11.7861.0001	367	11.7891.2083	360
11.5201.3321	480	11.6600.2084	441	11.7861.0983	367	11.7891.2084	360
11.5201.4311	478	11.6601.2083	423	11.7861.0984	367	11.7891.2086	360
11.5201.4312	478	11.6601.2084	423	11.7871.0001	367	11.7891.2481	365
11.5201.4321	478	11.6602.2083	423	11.7871.0983	367	11.7891.2482	365
11.5201.4322	478	11.6602.2084	423	11.7871.0984	367	11.7891.2483	365
11.5201.5311	477	11.6603.1083	441, 499	11.7890.0011	369	11.7891.2484	365
11.5201.5312	477	11.6603.1084	441, 499	11.7890.0012	369	11PAR/512	72
11.5201.5321	477	11.6604.1083	499	11.7890.0021	369	17ROFU311150	425
11.5201.5322	477	11.6604.1084	499	11.7890.0022	369	17ROFU311151	427
11.5201.6301	481	11.6606.1083	499	11.7890.0031	370	19.0032.0053	225
11.5201.6302	481	11.6606.1084	499	11.7890.0032	370	19.0032.0054	225
11.5201.6304	481	11.6606.2083	499	11.7890.0041	370	19.0032.0055	225
11.5202.1000	485	11.6606.2084	499	11.7890.0042	370	19.0032.0101	86
11.5202.1311	485	11.7600.0002.00	451	11.7890.0051	371	19.0032.0105	86
11.5202.1321	485	11.7600.0003.00	453	11.7890.0052	371	19.0032.0110	86
11.5202.1341	485	11.7600.0004.00	453	11.7890.0411	369	19.0032.0114	86
11.5202.2000	487	11.7600.0031	455	11.7890.0412	369	19.0032.0201	86
11.5202.2311	487	11.7600.0032	455	11.7890.1011	369	19.0032.0205	86
11.5202.2312	487	11.7600.0033	459	11.7890.1012	369	19.0032.0210	86
11.5202.2314	487	11.7600.0041	455	11.7890.1021	369	19.0032.0214	86
11.5202.2316	487	11.7600.0042	455	11.7890.1022	369	19.0032.0301	86
11.5202.2000	488	11.7600.0043	459	11.7890.1031	370	19.0032.0305	86
11.5202.3311	488	11.7600.2330	451	11.7890.1032	370	19.0032.0309	86
11.5202.3312	488	11.7600.2350	451	11.7890.1041	370	19.0032.0313	86
11.5202.4000	489	11.7600.2380	451	11.7890.1042	370	19.0032.0401	86
11.5202.4311	489	11.7600.3311	453	11.7890.1051	371	19.0032.0405	86
11.5202.4312	489	11.7600.3312	453	11.7890.1052	371	19.0032.0409	86
11.5202.4313	489	11.7600.3321	453	11.7891.0001	360	19.0032.0413	86
11.5202.5311	488	11.7600.3322	453	11.7891.0002	360	19.0032.0501	86
11.5202.5316	488	11.7600.4310	465	11.7891.0003	365	19.0032.0505	86
11.5203.0001.04	495	11.7600.4311	512	11.7891.0004	360	19.0032.0509	86
11.5203.1000.00	495	11.7851.0001	361	11.7891.0005	360	19.0032.0513	86
11.5203.1311	495	11.7851.0002	361	11.7891.0006	365	19.0032.0601	86
11.5203.1331	495	11.7851.0003	361	11.7891.0007	359	19.0032.0606	86
11.5203.1341	495	11.7851.0004	362	11.7891.0008	359	19.0032.0609	86
11.5203.2000.00	495	11.7851.0005	362	11.7891.0009	359	19.0032.0613	86
11.5203.2311	495	11.7851.0008	361	11.7891.0010	359	19.0033.0101	87
11.5203.2321	495	11.7851.0009	361	11.7891.0581	360	19.0033.0103	87
11.5203.2331	495	11.7851.0010	361	11.7891.0582	360	19.0033.0109	87
11.5203.3000.00	495	11.7851.0582	361	11.7891.0583	360	19.0033.0111	87
11.5203.3311	495	11.7851.0583	361	11.7891.0584	360	19.0033.0201	87
11.5203.3321	495	11.7851.0584	361	11.7891.0586	360	19.0033.0203	87
11.5203.3331	495	11.7851.0586	361	11.7891.1081	360	19.0033.0209	87

Reference	Page	Reference	Page	Reference	Page	Reference	Page
19.0033.0211	87	19.3004.2007	45	19.3029.2001	81	19.3038.0147	209
19.0033.0301	87	19.3004.2009	45	19.3029.2003	81	19.3038.0153	209
19.0033.0303	87	19.3004.2014	45	19.3029.3001	81	19.3038.0176	209
19.0033.0309	87	19.3004.2015	46	19.3030.0101	85	19.3038.0180	209
19.0033.0311	87	19.3004.3001	45	19.3030.0104	85	19.3038.0183	209
19.0034.0001	87	19.3004.3005	45	19.3030.0301	85	19.3038.0187	209
19.0034.0003	87	19.3004.3008	45	19.3030.0307	85	19.3038.0196	211
19.0034.0005	87	19.3004.3012	45	19.3030.0401	85	19.3038.0301	210
19.0034.0007	87	19.3004.3013	46	19.3030.0406	85	19.3038.0303	210
19.0035.1001	79	19.3005.1002	49	19.3030.0501	85	19.3038.0309	210
19.0035.2001	79	19.3005.1010	49	19.3030.0506	85	19.3038.0311	210
19.0035.3001	79	19.3005.1017	49	19.3031.0101	83	19.3038.0501	210
19.0035.4001	79	19.3005.1027	49	19.3031.0102	83	19.3038.0505	210
19.0035.5001	79	19.3005.1028	51	19.3031.0103	83	19.3038.0509	210
19.0035.6001	79	19.3005.1032	51	19.3031.0115	83	19.3038.0513	210
19.3000.1001	37	19.3005.1040	51	19.3031.0116	83	19.3038.0517	210
19.3000.1002	37	19.3005.2002	49	19.3031.0117	83	19.3038.0521	210
19.3000.2004	37	19.3005.2008	49	19.3031.0301	83	19.3038.0601	209
19.3000.2005	37	19.3005.2013	49	19.3031.0302	83	19.3038.0603	209
19.3000.2008	37	19.3005.2020	49	19.3031.0303	83	19.3038.0616	209
19.3000.2012	37	19.3005.2026	51	19.3031.0325	83	19.3038.0618	209
19.3000.3001	37	19.3005.3002	49	19.3031.0326	83	19.3039.1001	211
19.3000.3002	37	19.3005.3009	49	19.3031.0327	83	19.3039.1003	211
19.3000.3007	37	19.3005.3012	49	19.3031.0401	84	19.3039.2001	211
19.3000.3011	37	19.3005.3016	49	19.3031.0402	84	19.3039.2003	211
19.3002.1006	39	19.3005.3017	51	19.3031.0403	84	19.3042.0101	215
19.3002.1009	39	19.3006.1002	53	19.3031.0427	84	19.3042.0103	215
19.3002.2001	39	19.3006.1015	53	19.3031.0428	84	19.3042.0104	215
19.3002.2004	39	19.3006.1019	53	19.3031.0429	84	19.3042.0106	215
19.3002.2007	39	19.3006.1021	55	19.3031.0501	84	19.3042.0139	215
19.3002.3002	39	19.3006.1026	55	19.3031.0502	84	19.3042.0140	215
19.3002.3005	39	19.3006.2001	55	19.3031.0503	84	19.3042.0301	216
19.3003.1001	41	19.3006.2002	53	19.3031.0510	84	19.3042.0302	216
19.3003.1003	41	19.3006.2004	53	19.3031.0511	84	19.3042.0304	216
19.3003.1023	41	19.3006.2008	53	19.3031.0512	84	19.3042.0305	216
19.3003.1040	41	19.3006.2011	53	19.3036.1001	310	19.3043.0109	235
19.3003.1049	43	19.3006.3001	53	19.3036.1002	310	19.3043.0110	235
19.3003.1056	43	19.3006.3002	53	19.3036.1003	310	19.3043.0123	235
19.3003.1064	43	19.3006.3005	53	19.3036.1004	310	19.3043.0124	235
19.3003.1090	43	19.3006.3009	53	19.3036.1005	310	19.3043.0133	235
19.3003.2007	41	19.3006.3010	55	19.3036.1006	310	19.3043.0211	235
19.3003.2015	41	19.3008.1003	57	19.3036.1007	310	19.3043.0212	235
19.3003.2029	41	19.3008.1007	57	19.3036.1008	310	19.3043.0219	235
19.3003.2041	41	19.3019.1001	339, 519	19.3036.2001	310	19.3046.2101	167
19.3003.2050	43	19.3021.0001	337	19.3036.2002	310	19.3046.4203	168
19.3003.2073	43	19.3022.0002	337	19.3036.2007	310	19.3046.5101	168
19.3003.3002	41	19.3025.1001	65	19.3036.2008	310	19.3047.1201	167
19.3003.3024	41	19.3025.1002	65	19.3036.2011	310	19.3047.2101	168
19.3003.3048	41	19.3025.2001	65	19.3036.2012	310	19.3047.2201	168
19.3003.3065	43	19.3025.2002	65	19.3036.2013	310	19.3047.2301	168
19.3003.3066	41	19.3026.1001	65	19.3036.2014	310	19.3048.1101	167
19.3004.1001	45	19.3026.1003	65	19.3038.0101	209	19.3048.1201	167
19.3004.1009	45	19.3027.1001	65	19.3038.0103	209	19.3048.1301	167
19.3004.1010	45	19.3027.1003	65	19.3038.0129	209	19.3048.2101	168
19.3004.1015	45	19.3028.1001	65	19.3038.0131	209	19.3048.2201	168
19.3004.1021	46	19.3028.1003	65	19.3038.0139	209	19.3048.2301	168
19.3004.2002	45	19.3029.1001	81	19.3038.0143	209	19.3049.1101	167

Reference Index

Reference	Page	Reference	Page	Reference	Page	Reference	Page
19.3049.1201	167	19.3052.3302	483	19.3054.0043	206	19.3059.0121	230
19.3049.1301	167	19.3052.4101	483	19.3054.0044	205	19.3059.0122	230
19.3049.2101	169	19.3052.4102	483	19.3054.0045	206	19.3059.0123	230
19.3049.2201	169	19.3052.4201	483	19.3054.0046	205	19.3059.0133	230
19.3049.2301	169	19.3052.4202	483	19.3056.0001	219	19.3059.0134	230
19.3050.1101	167	19.3052.4301	483	19.3056.0002	219	19.3059.0135	230
19.3050.1201	167	19.3052.4302	483	19.3056.0003	219	19.3059.0169	231
19.3050.1301	167	19.3052.5101	483	19.3056.0004	219	19.3059.0170	231
19.3050.2101	169	19.3052.5102	483	19.3056.0005	219	19.3059.0171	231
19.3050.2201	169	19.3052.5201	483	19.3056.0006	219	19.3059.0181	231
19.3050.2301	169	19.3052.5202	483	19.3056.0007	219	19.3059.0182	231
19.3051.0101	157	19.3052.5301	483	19.3058.0002	229	19.3059.0183	231
19.3051.0201	157	19.3052.5302	483	19.3058.0006	229	19.3059.0193	231
19.3051.0301	157	19.3052.6101	483	19.3058.0010	229	19.3059.0194	231
19.3051.0401	158	19.3052.6102	483	19.3058.0014	229	19.3059.0195	231
19.3051.0501	158	19.3052.6201	483	19.3058.0018	229	19.3059.0205	231
19.3051.0601	158	19.3052.6202	483	19.3058.0022	229	19.3059.0206	231
19.3051.1101	157	19.3052.6301	483	19.3058.0026	229	19.3059.0207	231
19.3051.1201	157	19.3052.6302	483	19.3058.0030	229	19.3060.0005	232
19.3051.1301	157	19.3054.0001	205	19.3058.0034	229	19.3060.0006	232
19.3051.2101	157	19.3054.0002	206	19.3058.0038	229	19.3060.0007	232
19.3051.2201	157	19.3054.0003	205	19.3058.0042	229	19.3060.0008	232
19.3051.2301	157	19.3054.0004	206	19.3058.0046	229	19.3060.0021	232
19.3051.3101	157	19.3054.0005	205	19.3058.0057	229	19.3060.0022	232
19.3051.3201	157	19.3054.0006	206	19.3058.0061	229	19.3060.0023	232
19.3051.3301	157	19.3054.0007	205	19.3058.0065	229	19.3060.0024	232
19.3051.4101	157	19.3054.0008	206	19.3058.0069	229	19.3060.0035	232
19.3051.4201	157	19.3054.0010	205	19.3059.0004	230	19.3060.0036	232
19.3051.4301	157	19.3054.0011	206	19.3059.0005	230	19.3060.0043	232
19.3051.5101	158	19.3054.0013	206	19.3059.0006	230	19.3060.0044	232
19.3051.5201	158	19.3054.0014	205	19.3059.0016	230	19.3060.0053	232
19.3051.5301	158	19.3054.0015	206	19.3059.0017	230	19.3060.0054	232
19.3051.6101	158	19.3054.0016	205	19.3059.0018	230	19.3060.0055	232
19.3051.6201	158	19.3054.0017	206	19.3059.0027	230	19.3060.0056	232
19.3051.6301	158	19.3054.0018	205	19.3059.0028	230	19.3060.0069	232
19.3051.8101	158	19.3054.0019	205	19.3059.0029	230	19.3060.0070	232
19.3051.8201	158	19.3054.0020	205	19.3059.0039	230	19.3060.0071	232
19.3051.9701	158	19.3054.0021	205	19.3059.0040	230	19.3060.0072	232
19.3051.9801	159	19.3054.0022	205	19.3059.0041	230	19.3060.0083	232
19.3051.9901	159	19.3054.0023	205	19.3059.0051	230	19.3060.0084	232
19.3052.1101	483	19.3054.0024	205	19.3059.0052	230	19.3060.0091	232
19.3052.1102	483	19.3054.0025	205	19.3059.0053	230	19.3060.0092	232
19.3052.1201	483	19.3054.0026	205	19.3059.0061	230	19.3061.0004	233
19.3052.1202	483	19.3054.0027	206	19.3059.0062	230	19.3061.0005	233
19.3052.1301	483	19.3054.0029	206	19.3059.0063	230	19.3061.0006	233
19.3052.1302	483	19.3054.0030	205	19.3059.0073	231	19.3061.0016	233
19.3052.2101	483	19.3054.0031	205	19.3059.0074	231	19.3061.0017	233
19.3052.2102	483	19.3054.0032	205	19.3059.0075	231	19.3061.0018	233
19.3052.2201	483	19.3054.0033	206	19.3059.0085	231	19.3061.0028	233
19.3052.2202	483	19.3054.0034	205	19.3059.0086	231	19.3061.0029	233
19.3052.2301	483	19.3054.0035	206	19.3059.0087	231	19.3061.0030	233
19.3052.2302	483	19.3054.0036	205	19.3059.0097	231	19.3061.0040	233
19.3052.3101	483	19.3054.0037	205	19.3059.0098	231	19.3061.0041	233
19.3052.3102	483	19.3054.0038	206	19.3059.0099	231	19.3061.0042	233
19.3052.3201	483	19.3054.0040	206	19.3059.0109	231	19.3062.0002	233
19.3052.3202	483	19.3054.0041	205	19.3059.0110	231	19.3062.0006	233
19.3052.3301	483	19.3054.0042	205	19.3059.0111	231	19.3062.0010	233

Reference	Page	Reference	Page	Reference	Page	Reference	Page
19.3062.0014	233	19.3078.0018	245	19.3085.0004	325	19.3102.0091	304
19.3070.0001	503	19.3078.0021	245	19.3085.0005	325	19.3103.0003	306
19.3070.0002	503	19.3078.0024	245	19.3085.0006	325	19.3103.0004	306
19.3070.0003	503	19.3078.0026	245	19.3086.0004	325	19.3103.0005	306
19.3070.0004	503	19.3078.0028	245	19.3086.0005	325	19.3103.0015	306
19.3070.0005	503	19.3078.0031	245	19.3086.0006	325	19.3103.0016	306
19.3070.0006	503	19.3078.0034	245	19.3086.0010	325	19.3103.0017	306
19.3070.0007	503	19.3078.0037	245	19.3086.0011	325	19.3103.0027	306
19.3070.0008	503	19.3078.0039	246	19.3086.0012	325	19.3103.0028	306
19.3071.0001	503	19.3078.0043	246	19.3086.0013	325	19.3103.0029	306
19.3071.0002	503	19.3078.0047	246	19.3086.0014	325	19.3103.0039	306
19.3071.0003	503	19.3078.0051	246	19.3086.0015	325	19.3103.0040	306
19.3071.0004	503	19.3078.0055	246	19.3086.0016	325	19.3103.0041	306
19.3071.0007	503	19.3078.0058	246	19.3086.0017	325	19.3103.0051	306
19.3071.0008	503	19.3079.0002	246	19.3086.0018	325	19.3103.0052	306
19.3071.0009	503	19.3079.0006	246	19.3087.0002	323	19.3103.0053	306
19.3071.0010	503	19.3079.0010	246	19.3087.0004	323	19.3103.0063	306
19.3071.0012	503	19.3079.0013	246	19.3087.0006	323	19.3103.0064	306
19.3071.0013	503	19.3079.0014	246	19.3087.0008	323	19.3103.0065	306
19.3071.0014	503	19.3079.0016	246	19.3095.0001	267	19.3103.0075	307
19.3071.0015	503	19.3079.0017	247	19.3095.0004	267	19.3103.0076	307
19.3072.0002	255	19.3079.0018	247	19.3095.0005	267	19.3103.0077	307
19.3072.0003	255	19.3079.0020	247	19.3095.0007	267	19.3103.0087	307
19.3072.0004	255	19.3079.0021	247	19.3095.0009	267	19.3103.0088	307
19.3072.0005	255	19.3079.0023	247	19.3095.0011	267	19.3103.0089	307
19.3072.0006	255	19.3079.0024	247	19.3095.0013	267	19.3103.0103	307
19.3073.0001	253	19.3079.0026	247	19.3095.0014	267	19.3103.0104	307
19.3073.0002	253	19.3079.0030	247	19.3095.0015	267	19.3103.0105	307
19.3073.0003	253	19.3079.0034	247	19.3095.0016	267	19.3103.0111	307
19.3073.0004	253	19.3079.0038	247	19.3095.0017	267	19.3103.0112	307
19.3073.0005	253	19.3079.0042	247	19.3097.0002	271	19.3103.0113	307
19.3073.0006	253	19.3079.0046	247	19.3097.0006	271	19.3103.0120	306
19.3074.0002	249	19.3079.0051	247	19.3097.0011	271	19.3103.0121	306
19.3074.0006	249	19.3079.0052	247	19.3097.0012	271, 273	19.3103.0122	306
19.3074.0010	249	19.3080.0002	249	19.3097.0019	271	19.3103.0135	306
19.3074.0014	250	19.3080.0006	249	19.3097.0020	271, 273	19.3103.0136	306
19.3074.0018	250	19.3080.0010	249	19.3099.0002	277	19.3103.0137	306
19.3074.0022	250	19.3080.0014	250	19.3099.0004	277	19.3103.0170	307
19.3075.0002	249	19.3080.0018	250	19.3099.0007	277	19.3103.0171	307
19.3075.0006	249	19.3080.0022	250	19.3102.0002	303	19.3103.0172	307
19.3075.0010	249	19.3083.0001	323	19.3102.0006	303	19.3103.0182	307
19.3075.0014	250	19.3083.0002	323	19.3102.0010	303	19.3103.0183	307
19.3075.0018	250	19.3083.0003	323	19.3102.0014	303	19.3103.0184	307
19.3075.0022	250	19.3083.0004	323	19.3102.0017	303	19.3103.0192	307
19.3076.0002	249	19.3084.0001	324	19.3102.0022	303	19.3103.0193	307
19.3076.0006	249	19.3084.0002	324	19.3102.0036	303	19.3103.0194	307
19.3076.0010	249	19.3084.0003	324	19.3102.0038	303	19.3103.0206	307
19.3076.0014	250	19.3084.0004	324	19.3102.0043	303	19.3103.0207	307
19.3076.0018	250	19.3084.0005	324	19.3102.0046	303	19.3103.0208	307
19.3076.0022	250	19.3084.0006	324	19.3102.0049	304	19.3103.0215	308
19.3077.0002	249	19.3084.0007	324	19.3102.0050	304	19.3103.0216	308
19.3077.0006	249	19.3084.0008	324	19.3102.0064	303	19.3103.0223	308
19.3077.0010	249	19.3084.0009	324	19.3102.0068	303	19.3103.0230	308
19.3077.0014	250	19.3084.0010	324	19.3102.0071	303	19.3103.0231	308
19.3077.0018	250	19.3084.0011	324	19.3102.0074	303	19.3103.0232	308
19.3077.0022	250	19.3084.0012	324	19.3102.0079	303	19.3104.0035	308
19.3078.0014	245	19.3085.0002	325	19.3102.0090	304	19.3104.0036	308

Reference Index

Reference	Page	Reference	Page	Reference	Page	Reference	Page
19.3104.0043	308	19.3110.0009	299	19.3120.0001	397	19.3125.0024	376
19.3104.0044	308	19.3110.0013	299	19.3120.0002	397	19.3126.0001	377
19.3104.0083	308	19.3110.0014	299	19.3120.0003	397	19.3126.0002	377
19.3104.0084	308	19.3110.0015	299	19.3120.0004	397	19.3126.0003	377
19.3104.0091	308	19.3110.0019	299	19.3120.0005	397	19.3126.0004	377
19.3104.0092	308	19.3110.0020	299	19.3120.0006	397	19.3126.0005	377
19.3105.0004	308	19.3110.0021	299	19.3120.0007	397	19.3126.0006	377
19.3105.0005	308	19.3110.0025	299	19.3120.0008	397	19.3126.0007	377
19.3105.0006	308	19.3110.0026	299	19.3120.0009	397	19.3126.0008	377
19.3105.0016	308	19.3110.0027	299	19.3120.0010	398	19.3126.0009	377
19.3105.0017	308	19.3110.0031	299	19.3120.0011	398	19.3126.0010	377
19.3105.0018	308	19.3110.0032	299	19.3120.0012	398	19.3126.0011	377
19.3105.0028	308	19.3110.0033	299	19.3120.0013	397	19.3126.0012	377
19.3105.0029	308	19.3111.0001	287	19.3120.0014	398	19.3127.0001	319
19.3105.0030	308	19.3111.0003	287	19.3120.0015	397	19.3127.0002	319
19.3105.0040	308	19.3111.0005	287	19.3120.0016	398	19.3127.0003	320
19.3105.0041	308	19.3111.0007	287	19.3120.0017	397	19.3127.0004	320
19.3105.0042	308	19.3111.0009	287	19.3120.0018	398	19.3127.0005	320
19.3106.0006	308	19.3111.0011	287	19.3120.0019	399	19.3127.0006	319
19.3106.0010	308	19.3111.0017	287	19.3120.0020	399	19.3127.0007	320
19.3106.0014	308	19.3111.0019	287	19.3120.0021	399	19.3127.0008	320
19.3106.0018	308	19.3112.0001	288	19.3120.0022	398	19.3127.0009	320
19.3107.0001	291	19.3112.0002	288	19.3120.0023	398	19.3127.0010	319
19.3107.0003	291	19.3112.0003	288	19.3120.0024	398	19.3127.0011	319
19.3107.0005	291	19.3112.0004	288	19.3120.0025	398	19.3127.0012	320
19.3107.0007	291	19.3112.0005	288	19.3120.0026	398	19.3127.0013	320
19.3107.0009	291	19.3112.0006	288	19.3120.0027	398	19.3127.0014	320
19.3107.0011	291	19.3112.0013	288	19.3120.0028	399	19.3127.0015	319
19.3107.0017	291	19.3112.0014	288	19.3120.0029	399	19.3127.0016	320
19.3107.0019	291	19.3112.0015	288	19.3120.0030	399	19.3127.0017	320
19.3108.0001	293	19.3112.0016	288	19.3121.0001	400	19.3127.0018	320
19.3108.0002	293	19.3112.0017	288	19.3121.0002	400	19.3127.0019	319
19.3108.0003	293	19.3112.0018	288	19.3121.0003	400	19.3127.0020	320
19.3108.0007	293	19.3112.0025	288	19.3121.0004	400	19.3127.0021	320
19.3108.0008	293	19.3112.0026	288	19.3121.0005	400	19.3127.0022	320
19.3108.0009	293	19.3112.0027	288	19.3121.0006	400	19.3127.0023	319
19.3108.0013	293	19.3112.0028	288	19.3121.0007	400	19.3127.0024	320
19.3108.0014	293	19.3112.0029	288	19.3121.0008	400	19.3127.0025	320
19.3108.0015	293	19.3112.0030	288	19.3121.0009	400	19.3127.0026	320
19.3108.0019	293	19.3113.0001	292	19.3121.0010	400	19.3127.0027	319
19.3108.0020	293	19.3113.0003	292	19.3121.0011	400	19.3127.0028	319
19.3108.0021	293	19.3114.0001	297	19.3121.0012	400	19.3127.0029	320
19.3108.0025	293	19.3114.0003	297	19.3121.0013	400	19.3127.0030	320
19.3108.0026	293	19.3116.0008	344	19.3121.0014	400	19.3127.0031	320
19.3108.0027	293	19.3116.0014	344	19.3121.0015	400	19.3127.0032	319
19.3108.0031	293	19.3117.0002	342	19.3121.0016	400	19.3127.0033	320
19.3108.0032	293	19.3117.0006	342	19.3125.0002	376	19.3127.0034	320
19.3108.0033	293	19.3117.0008	342	19.3125.0004	376	19.3127.0035	320
19.3109.0001	297	19.3117.0012	342	19.3125.0006	376	19.3127.0036	321
19.3109.0003	298	19.3117.0015	342	19.3125.0008	376	19.3127.0037	403
19.3109.0005	297	19.3117.0017	342	19.3125.0010	376	19.3127.0038	403
19.3109.0009	298	19.3117.0020	342	19.3125.0012	376	19.3127.0039	403
19.3110.0001	299	19.3117.0023	342	19.3125.0014	376	19.3127.0040	403
19.3110.0002	299	19.3117.0025	342	19.3125.0016	376	19.3127.0042	403
19.3110.0003	299	19.3117.0027	343	19.3125.0018	376	19.3127.0043	403
19.3110.0007	299	19.3117.0029	342	19.3125.0020	376	19.3127.0044	403
19.3110.0008	299	19.3117.0033	342	19.3125.0022	376	19.3127.0045	403

Reference	Page	Reference	Page	Reference	Page	Reference	Page
19.3127.0047	403	19.3140.0012	516	19.3146.0001	445	19.3159.0003	427
19.3127.0048	404	19.3140.0016	516	19.3147.0001	449	19.3159.0004	427
19.3127.0049	404	19.3140.0018	516	19.3147.0002	449	19.3159.0005	427
19.3127.0050	404	19.3140.0020	516	19.3147.0003	449	19.3159.0006	427
19.3127.0051	403	19.3140.0022	516	19.3148.0001	521	19.3159.0007	427
19.3127.0052	404	19.3140.0024	516	19.3148.0002	521	19.3159.0008	427
19.3127.0053	404	19.3140.0026	516	19.3149.0001	521	19.3159.0009	427
19.3127.0054	404	19.3140.0028	516	19.3149.0002	521	19.3159.0010	427
19.3128.0001	391	19.3141.0002	515	19.3152.0001	473	19.3159.0011	427
19.3128.0002	391	19.3141.0004	515	19.3152.0002	473	19.3159.0012	427
19.3128.0003	391	19.3141.0006	515	19.3152.0003	473	19.3160.0025	443
19.3128.0004	391	19.3141.0008	515	19.3152.0004	473	19.3160.0026	443
19.3128.0005	391	19.3141.0010	515	19.3152.0005	473	19.3160.0027	443
19.3128.0006	391	19.3141.0012	515	19.3152.0006	473	19.3160.0028	443
19.3128.0007	391	19.3141.0014	515	19.3152.0007	473	19.3160.0029	443
19.3128.0008	391	19.3141.0016	515	19.3153.0001	520	19.3160.0030	443
19.3128.0009	391	19.3141.0018	515	19.3153.0002	520	19.3160.0055	443
19.3128.0010	391	19.3141.0020	515	19.3153.0003	520	19.3160.0056	443
19.3128.0011	391	19.3141.0022	515	19.3153.0004	520	19.3160.0057	443
19.3133.0001	381	19.3141.0024	515	19.3153.0005	520	19.3160.0058	443
19.3133.0002	381	19.3142.0001	469	19.3153.0006	520	19.3160.0059	443
19.3133.0004	381	19.3142.0002	469	19.3153.0007	520	19.3160.0060	443
19.3133.0005	381	19.3142.0003	469	19.3153.0008	520	19.3160.0085	443
19.3133.0007	381	19.3142.0004	469	19.3153.0009	520	19.3160.0086	443
19.3133.0009	381	19.3142.0005	469	19.3153.0010	520	19.3160.0087	443
19.3133.0010	381	19.3142.0006	469	19.3153.0011	520	19.3160.0088	443
19.3133.0012	381	19.3142.0007	469	19.3153.0012	520	19.3160.0089	443
19.3133.0013	381	19.3142.0008	469	19.3153.0013	520	19.3160.0090	443
19.3133.0014	381	19.3142.0009	469	19.3153.0014	520	19.3160.0117	425
19.3135.0002	383	19.3142.0010	469	19.3153.0015	520	19.3160.0118	425
19.3135.0006	383	19.3142.0011	469	19.3153.0016	520	19.3160.0119	425
19.3135.0009	383	19.3142.0012	469	19.3153.0017	520	19.3160.0120	425
19.3135.0012	383	19.3142.0013	469	19.3153.0018	520	19.3160.0147	425
19.3135.0016	383	19.3142.0014	469	19.3153.0019	520	19.3160.0148	425
19.3135.0019	383	19.3142.0015	469	19.3153.0020	520	19.3160.0149	425
19.3135.0022	383	19.3142.0016	469	19.3153.0021	520	19.3160.0150	425
19.3135.0026	383	19.3142.0017	469	19.3153.0022	520	19.3161.0017	444
19.3135.0029	383	19.3142.0018	469	19.3153.0023	520	19.3161.0018	444
19.3135.0032	383	19.3142.0019	469	19.3153.0024	520	19.3161.0119	426
19.3137.0001	385	19.3142.0020	469	19.3153.0025	520	19.3161.0120	426
19.3138.0004	376	19.3142.0021	469	19.3153.0026	520	19.3161.0047	444
19.3138.0006	376	19.3142.0022	469	19.3153.0027	520	19.3161.0048	444
19.3138.0010	376	19.3144.0002	411	19.3153.0028	520	19.3161.0149	426
19.3138.0012	376	19.3144.0004	411	19.3153.0029	520	19.3161.0150	426
19.3138.0016	376	19.3144.0006	411	19.3153.0030	520	19.3161.0077	444
19.3138.0018	376	19.3144.0008	411	19.3153.0031	520	19.3161.0078	444
19.3138.0020	376	19.3144.0010	411	19.3153.0032	520	19.3162.0001	448
19.3138.0024	376	19.3144.0012	411	19.3153.0033	520	19.3162.0002	448
19.3138.0028	376	19.3144.0014	411	19.3153.0034	520	19.3163.0001	446
19.3138.0032	376	19.3144.0016	411	19.3153.0035	520	19.3163.0002	446
19.3138.0036	377	19.3144.0018	411	19.3156.0001	428	19.3164.0001	429
19.3139.0001	517	19.3144.0020	411	19.3157.0001	448	19.3164.0002	429
19.3139.0002	517	19.3144.0022	411	19.3157.0002	448	19.3164.0003	429
19.3140.0002	516	19.3144.0024	411	19.3158.0001	446	19.3164.0004	429
19.3140.0004	516	19.3145.0001	437	19.3158.0002	446	19.3164.0005	429
19.3140.0008	516	19.3145.0002	437	19.3159.0001	427	19.3164.0006	429
19.3140.0010	516	19.3145.0003	437	19.3159.0002	427	19.3164.0007	429

Reference Index

Reference	Page	Reference	Page	Reference	Page	Reference	Page
19.3164.0008	429	19.3177.0009	432	19.3200.5007	201	19.3205.0008	389
19.3164.0009	429	19.3177.0010	432	19.3200.5008	201	19.3205.0009	389
19.3164.0010	429	19.3177.0011	432	19.3201.0001	185	19.3205.0010	389
19.3164.0011	429	19.3177.0012	432	19.3201.0002	185	19.3205.0011	389
19.3164.0012	429	19.3177.0013	432	19.3201.0003	185	19.3205.0012	389
19.3165.0001	519	19.3177.0014	432	19.3201.0004	185	19.3205.0013	389
19.3165.0002	519	19.3177.0015	432	19.3201.0005	185	19.3205.0014	389
19.3165.0003	519	19.3178.0002	461	19.3201.0006	185	19.3205.0015	389
19.3165.0004	519	19.3178.0004	461	19.3201.0007	185	19.3205.0016	389
19.3165.0005	519	19.3178.0006	461	19.3201.0008	185	19.3206.0005	387
19.3165.0006	519	19.3179.0001	461	19.3201.0009	185	19.3206.0006	387
19.3165.0007	519	19.3200.0001	203	19.3201.0010	185	19.3206.0007	387
19.3168.0001	505	19.3200.0002	203	19.3201.0011	185	19.3206.0008	387
19.3168.0002	505	19.3200.0004	203	19.3201.0012	185	19.3206.0009	387
19.3169.0001	520	19.3200.0005	203	19.3201.0013	185	19.3206.0010	387
19.3169.0002	520	19.3200.0006	203	19.3201.0014	185	19.3206.0011	387
19.3169.0003	520	19.3200.0007	203	19.3201.0015	185	19.3206.0012	387
19.3169.0004	520	19.3200.0008	203	19.3201.0016	185	19.3206.0013	387
19.3174.0001	433	19.3200.0009	203	19.3201.0017	185	19.3206.0014	387
19.3174.0002	433	19.3200.1001	202	19.3201.0018	185	19.3206.0015	387
19.3174.0003	433	19.3200.1002	202	19.3201.0019	185	19.3206.0016	387
19.3174.0004	433	19.3200.1003	202	19.3201.0020	185	19.3206.0017	387
19.3174.0005	433	19.3200.1004	202	19.3201.0021	185	19.3206.0018	387
19.3174.0006	433	19.3200.1005	202	19.3201.0022	185	19.3206.0019	387
19.3174.0007	433	19.3200.1006	202	19.3201.0023	185	19.3206.0020	387
19.3174.0008	433	19.3200.1007	202	19.3201.0024	185	19.3207.0001	389
19.3174.0009	433	19.3200.1008	202	19.3203.0001	390	19.3207.0002	389
19.3175.0001	434	19.3200.2001	203	19.3203.0002	390	19.3207.0003	389
19.3175.0002	434	19.3200.2002	203	19.3203.0003	390	19.3207.0004	389
19.3175.0003	434	19.3200.2003	203	19.3203.0004	390	19.3207.0005	389
19.3175.0004	434	19.3200.2004	203	19.3203.0005	390	19.3207.0006	389
19.3175.0005	434	19.3200.2005	203	19.3203.0006	390	19.3207.0007	389
19.3176.0001	431	19.3200.2006	203	19.3203.0007	390	19.3207.0008	389
19.3176.0002	431	19.3200.2007	203	19.3203.0008	390	19.3207.0009	389
19.3176.0003	431	19.3200.2008	203	19.3203.0009	390	19.3207.0010	389
19.3176.0004	431	19.3200.3001	202	19.3203.0010	390	19.3207.0011	389
19.3176.0005	431	19.3200.3002	202	19.3203.0011	390	19.3207.0012	389
19.3176.0006	431	19.3200.3003	202	19.3203.0012	390	19.3208.0001	387
19.3176.0007	431	19.3200.3004	202	19.3204.0005	388	19.3208.0002	387
19.3176.0008	431	19.3200.3005	202	19.3204.0006	388	19.3208.0003	387
19.3176.0009	431	19.3200.3006	202	19.3204.0007	388	19.3208.0004	387
19.3176.0010	431	19.3200.3007	202	19.3204.0008	388	19.3208.0005	387
19.3176.0011	431	19.3200.3008	202	19.3204.0009	388	19.3208.0006	387
19.3176.0012	431	19.3200.4001	201	19.3204.0010	388	19.3208.0007	387
19.3176.0013	431	19.3200.4002	201	19.3204.0011	388	19.3208.0008	387
19.3176.0014	431	19.3200.4003	201	19.3204.0012	388	19.3208.0009	387
19.3176.0015	431	19.3200.4004	201	19.3204.0013	388	19.3208.0010	387
19.3176.0016	431	19.3200.4005	201	19.3204.0014	388	19.3208.0011	387
19.3176.0017	431	19.3200.4006	201	19.3204.0015	388	19.3208.0012	387
19.3177.0001	432	19.3200.4007	201	19.3204.0016	388	19.3209.0005	281
19.3177.0002	432	19.3200.4008	201	19.3205.0001	389	19.3209.0006	281
19.3177.0003	432	19.3200.5001	201	19.3205.0002	389	19.3209.0007	281
19.3177.0004	432	19.3200.5002	201	19.3205.0003	389	19.3209.0008	281
19.3177.0005	432	19.3200.5003	201	19.3205.0004	389	19.3209.0013	281
19.3177.0006	432	19.3200.5004	201	19.3205.0005	389	19.3209.0014	281
19.3177.0007	432	19.3200.5005	201	19.3205.0006	389	19.3209.0015	281
19.3177.0008	432	19.3200.5006	201	19.3205.0007	389	19.3209.0016	281

Reference	Page	Reference	Page	Reference	Page	Reference	Page
19.3209.0017	281	19.3213.0039	196	19.3214.0015	341	19.3219.0030	291
19.3209.0018	281	19.3213.0040	196	19.3214.0016	341	19.3219.0032	297
19.3209.0019	281	19.3213.0041	196	19.3214.0017	341	19.3219.0037	297
19.3209.0020	281	19.3213.0042	196	19.3214.0018	341	19.3219.0042	297
19.3209.0021	281	19.3213.0043	196	19.3214.0019	341	19.3219.0047	297
19.3209.0022	281	19.3213.0044	196	19.3214.0020	341	19.3237.0001	504
19.3209.0023	281	19.3213.0045	196	19.3218.0001	223	19.3237.0002	504
19.3209.0024	281	19.3213.0046	196	19.3218.0002	223	19.3237.0003	504
19.3209.0025	281	19.3213.0047	196	19.3218.0005	223	19.3237.0004	504
19.3209.0026	281	19.3213.0048	196	19.3218.0006	223	19.3237.0005	504
19.3210.0001	375	19.3213.0049	197	19.3218.0007	223	19.3237.0006	504
19.3210.0002	375	19.3213.0050	197	19.3218.0011	223	19.3238.0002	161
19.3210.0003	375	19.3213.0051	197	19.3218.0012	223	19.3238.0004	161
19.3210.0004	375	19.3213.0052	197	19.3218.0015	223	19.3238.0006	161
19.3210.0005	375	19.3213.0053	197	19.3218.0016	223	19.3238.0008	161
19.3210.0006	375	19.3213.0054	197	19.3218.0017	223	19.3244.0001	279
19.3210.0007	375	19.3213.0055	197	19.3218.0020	224	19.3244.0002	279
19.3210.0008	375	19.3213.0056	197	19.3218.0021	224	19.3244.0003	279
19.3210.0009	375	19.3213.0057	197	19.3218.0022	224	19.3244.0004	279
19.3213.0001	196	19.3213.0058	197	19.3218.0023	224	19.3244.0005	279
19.3213.0002	196	19.3213.0059	197	19.3218.0024	224	19.3244.0006	279
19.3213.0003	196	19.3213.0060	197	19.3218.0025	224	19.3244.0007	279
19.3213.0004	196	19.3213.0061	197	19.3218.0032	224	19.3248.0001	269
19.3213.0005	196	19.3213.0062	197	19.3218.0033	224	19.3248.0002	269
19.3213.0006	196	19.3213.0063	197	19.3218.0034	224	19.3249.0002	273
19.3213.0007	196	19.3213.0064	197	19.3218.0035	224	19.3249.0004	273
19.3213.0008	196	19.3213.0065	197	19.3218.0036	224	19.3249.0006	273
19.3213.0009	196	19.3213.0066	197	19.3218.0037	224	19.3249.0008	273
19.3213.0010	196	19.3213.0067	197	19.3218.0038	224	19.3249.0010	273
19.3213.0011	196	19.3213.0068	197	19.3218.0039	224	19.3249.0012	273
19.3213.0012	196	19.3213.0069	197	19.3218.0040	224	19.3249.0014	273
19.3213.0013	196	19.3213.0070	197	19.3218.0047	224	19.3249.0016	273
19.3213.0014	196	19.3213.0071	197	19.3218.0048	224	19.3249.0018	273
19.3213.0015	196	19.3213.0072	197	19.3218.0049	224	19.3250.0001	435
19.3213.0016	196	19.3213.0073	197	19.3218.0050	225	19.3250.0002	435
19.3213.0017	196	19.3213.0074	197	19.3218.0051	225	19.3250.0003	435
19.3213.0018	196	19.3213.0075	197	19.3218.0052	225	19.3250.0004	435
19.3213.0019	196	19.3213.0076	197	19.3218.0062	225	19.3251.0001	433
19.3213.0020	196	19.3213.0077	197	19.3218.0063	225	19.3251.0002	433
19.3213.0021	196	19.3213.0078	197	19.3218.0064	225	19.3251.0003	433
19.3213.0022	196	19.3213.0079	197	19.3218.0065	225	19.3252.0001	309
19.3213.0023	196	19.3213.0080	197	19.3218.0066	225	19.3252.0002	309
19.3213.0024	196	19.3213.0081	197	19.3218.0067	225	19.3252.0003	309
19.3213.0025	196	19.3214.0001	341	19.3218.0068	225	19.3252.0004	309
19.3213.0026	196	19.3214.0002	341	19.3218.0069	225	19.3252.0005	309
19.3213.0027	196	19.3214.0003	341	19.3218.0070	225	19.3252.0006	309
19.3213.0028	196	19.3214.0004	341	19.3219.0001	287	19.3253.0001	295
19.3213.0029	196	19.3214.0005	341	19.3219.0002	287	19.3253.0002	295
19.3213.0030	196	19.3214.0006	341	19.3219.0005	287	19.3253.0003	295
19.3213.0031	196	19.3214.0007	341	19.3219.0006	287	19.3253.0004	295
19.3213.0032	196	19.3214.0008	341	19.3219.0007	287	19.3254.0001	343
19.3213.0033	196	19.3214.0009	341	19.3219.0010	287	19.3254.0002	343
19.3213.0034	196	19.3214.0010	341	19.3219.0012	291	0147L/8320	187
19.3213.0035	196	19.3214.0011	341	19.3219.0017	291	0147L/8320D	187
19.3213.0036	196	19.3214.0012	341	19.3219.0022	291	0147L/8320DD	187
19.3213.0037	196	19.3214.0013	341	19.3219.0025	291	0147L/8340	187
19.3213.0038	196	19.3214.0014	341	19.3219.0027	291	0147L/8340D	187

Reference Index

Reference	Page	Reference	Page	Reference	Page	Reference	Page
0147L/8340DD	187	2407D/03	133	6E1-3001-3-1,6M3	304	CL1/0401/04	74
0147L/8420	187	2407D/04	133	6E1-500KW211P-3Y	324	CL1/0402/04	74
0147L/8420D	187	2408/01	131	6E1-500KW211P-BY	324	CL1/0403/04	75
0147L/8420DD	187	2408/02	131	6E1-500KW21K-3Y	323	CL1/0404/04	75
0147L/8440	187	2408D/01	133	6E1-500KW341P-3	267	CL1/0408/04	73
0147L/8440D	187	2408D/02	133	6E1-500KW34K-3	399	CL1/0409/04	73
0147L/8440DD	187	2409	132	6E1-500KW34K-3Y	267	CL1/0410/04	73
01LU-UN	321	2409D	133	6E1-500KWANK-3	304, 321	CL1/0411/04	73
01LU-UPZ	321	2411	134	6E1-500KWB34K-3	399		
0585L/E6083	182	2413	132	6E1-600XLN1P	304		
0585L/E6083D	182	2417	132	6E1-600XLN1P-3	304		
0585L/E6083DD	182	2417D	133	6E1-600XLN1P-3BL	304		
0585L/E6084	182	2418	132	6E1-600XLN1P-3W	304		
0585L/E6084D	182	2420/100	131	6E1-600XLN1P-BL	304		
0585L/E6084DD	182	2420/200	131	6E1-600XLN1PW	304		
0585L/I6083	182	2420/300	131	6E1-600XLN-3	304		
0585L/I6083D	182	2420/400	131	6E1-600XLN-3BLK	304		
0585L/I6083DD	182	2420D/100	133	6E1-600XLN-3W	304		
0585L/I6084	182	2420D/200	133	6E1-7104-1-1,6M3	304		
0585L/I6084D	182	2420D/300	133	6E1-7104-2-1,6M	304		
0585L/I6084DD	182	2420D/400	133	6E1-8670-B-1,5	267, 304, 321, 399		
0E1ALLS-CPO	399	2421/100	131	6E1-8670-B-1,5-3X	304, 321		
0E1ALLS-SP	399	2421/200	131	71/LDT06024	534		
0E1ALLS-SPM	399	2421/300	131	71/LDT15024	534		
0E1FWLBOXD1	411	2421/400	131	71/LDT9624	534		
0E1FWLBOXD2	411	2421D/100	133	CL1/0101/17	72		
0E1FWLBOXD3	411	2421D/200	133	CL1/0102/17	72		
0E1FWLBOXD4	411	2421D/300	133	CL1/0103/17	72		
0OSLR300-SZ	66	2421D/400	133	CL1/0104/17	74		
0OSME-EPM	66	2427	101, 105, 109, 132	CL1/0105/17	73		
0OSME-EPMA	66	2431	132	CL1/0106/17	72		
0OSME-ZEA1	66	2432	132	CL1/0107/17	75		
0OSME-ZEA2	66	2434	132	CL1/0108/17	75		
0OSME-ZEA3	66	2435	132	CL1/0201/00	72		
0OSME-ZEA4	66	2438	132	CL1/0202/00	72		
0OSME-ZEB1	66	2439	132	CL1/0203/00	72		
0OSME-ZEB2	66	2440	132	CL1/0204/00	72		
0OSME-ZEB3	66	2441	132	CL1/0205/00	72		
0OSME-ZEB4	66	2442	132	CL1/0206/04	75		
0OSMPZ300-SZ	66	2M-X414LKP90	211	CL1/0207/04	75		
2400	131, 133	2TJ5782-3	443	CL1/0208/04	75		
2401/01	131	2TJ5782-4	443	CL1/0209/04	75		
2401/02	131	3100713600	72	CL1/0210/04	75		
2401D/01	133	47/01/33	61	CL1/0211/04	75		
2401D/02	133	47/02/33	61	CL1/0212/04	75		
2402	131	47/L0383DD	61	CL1/0213/04	75		
2402D	133	47/L0384DD	61	CL1/0214/04	75		
2403	131	47/L0783DD	61	CL1/0215/04	75		
2403/10	131	47/L0784DD	61	CL1/0216/04	75		
2403D	133	47/L1383DD	61	CL1/0217/04	75		
2403D/10	133	47/L1384DD	61	CL1/0218/04	75		
2407/01	131	47/L2083DD	61	CL1/0303/04	73		
2407/02	131	47/L2084DD	61	CL1/0306/04	73		
2407/03	131	50ALF75/	437	CL1/0307/04	73		
2407/04	131	50RO4008	427	CL1/0308/04	73		
2407D/01	133	6E1-3001-3-1,6M	304	CL1/0309/04	73		
2407D/02	133						

LUXIONA

Passeig de la Ribera, 115
08420 Canovelles, Barcelona
Spain
+34 938 466 909
info@luxiona.com

Spain

Passeig de la Ribera, 115
08420 Canovelles, Barcelona,
Spain
+34 938 466 909
info.spain@luxiona.com

Export

Export Department
+34 938 616 893
export@luxiona.com

Poland

Ul. Sochaczewska 110
Macierzysz
05-850 Ozarow Mazowiecki
Poland
+48 022 721 72 72
info.poland@luxiona.com

Germany

Westhafenstraße 1
13353 Berlin,
Germany
+49 3040 535 600
info@luxiona.de

France

7 Rue Colonel Chambonnet
69500 Bron
France
+33 472 146 666
info.france@luxiona.com

Italy

Via Luigi Cadamosto 4
26900 Lodi (LO)
Italy
+39 0 298 274 010
info.italy@luxiona.com

Peru

Jr. Paita 220 Zona Industrial
San Juan de Miraflores (Lima)
Perú
+51 127 688 22
info.peru@luxiona.com

Chile

Santa Adela 0618
Recoleta, Santiago
Chile
+56 22 969 5260
info.chile@luxiona.com

Mexico

Av. de los Arcos 9
76246 Queretaro
Mexico
+52 442 153 1020
info.mexico@luxiona.com

China

Room 1806, No. 13
Dongguan Avenue Dongcheng
Part,
Dongchen Street,
Dongguan City, Guangdong
Province
China
info.china@luxiona.com

Marketing
marketing@luxiona.com

Purchasing
globalpurchasing@luxiona.com

Lighting Consulting
lightingconsulting@luxiona.com

luxiona.com

support@luxiona

 [Linkedin.com/company/luxiona](https://www.linkedin.com/company/luxiona)
 [Facebook.com/luxionagroup](https://www.facebook.com/luxionagroup)
 [Instagram.com/luxionagroup](https://www.instagram.com/luxionagroup)
 [YouTube: Luxiona Group](https://www.youtube.com/Luxiona Group)



